

State of California  
AIR RESOURCES BOARD

Executive Order VR-101-I

Franklin Fueling Systems, Inc.  
Phil-Tite Phase I Vapor Recovery System

WHEREAS, the California Air Resources Board (ARB) has established, pursuant to California Health and Safety Code sections 25290.1.2, 39600, 39601 and 41954, certification procedures for systems designed for the control of gasoline vapor emissions during the filling of underground gasoline storage tanks, in its **CP-201, Certification Procedure for Vapor Recovery Systems at Gasoline Dispensing Facilities** (Certification Procedure) as last amended May 25, 2006, incorporated by reference in title 17, California Code of Regulations, section 94011;

WHEREAS, ARB has established, pursuant to California Health and Safety Code sections 39600, 39601 and 41954, test procedures for determining the compliance of Phase I vapor recovery systems with emission standards;

WHEREAS, Franklin Fueling Systems, Inc. (FFS) requested and was granted certification of the Phil-Tite Phase I Vapor Recovery System (Phil-Tite system) pursuant to the Certification Procedure on June 19, 2001 by Executive Order VR-101-A, and last modified on November 22, 2006, by Executive Order VR-101-H.

WHEREAS, this Executive Order is modified to reflect the changes to the Pressure Vacuum Vent Valve cracking pressure specification;

WHEREAS, the Certification Procedure provides that the ARB Executive Officer shall issue an Executive Order if he or she determines that the vapor recovery system, including modifications, conforms to all of the applicable requirements set forth in the Certification Procedure;

WHEREAS, G-01-032 delegates to the Chief of the Monitoring and Laboratory Division the authority to certify or approve modifications to certified Phase I and Phase II vapor recovery systems for gasoline dispensing facilities (GDF); and

WHEREAS, I, William V. Loscutoff, Chief of the Monitoring and Laboratory Division, find that the Phil-Tite Phase I Vapor Recovery System, including modifications, conforms with all of the requirements set forth in the Certification Procedure, and results in a vapor recovery system which is at least 98.0 percent efficient as tested in accordance with test procedure **TP-201.1, Volumetric Efficiency for Phase I Systems (October 8, 2003)**;

NOW, THEREFORE, IT IS HEREBY ORDERED that the Phil-Tite system is certified to be at least 98.0 percent efficient when installed and maintained as specified herein and in the following exhibits. Exhibit 1 contains a list of the certified components. Exhibit 2 contains the performance standards and specifications, typical installation drawings and

maintenance intervals for the Phil-Tite system as installed in a gasoline dispensing facility (GDF). Exhibit 3 contains the manufacturing specifications.

IT IS FURTHER ORDERED that compliance with the applicable certification requirements, rules and regulations of the Division of Measurement Standards of the Department of Food and Agriculture, the Office of the State Fire Marshal of the Department of Forestry and Fire Protection, the Division of Occupational Safety and Health of the Department of Industrial Relations, and the Division of Water Quality of the State Water Resources Control Board are made conditions of this certification.

IT IS FURTHER ORDERED that Phil-Tite shall provide a warranty for the vapor recovery system and components to the initial purchaser. The warranty shall be passed on to each subsequent purchaser within the warranty period. The manufacturer of components not manufactured by Phil-Tite shall provide a warranty for each of their components certified herein. This warranty shall include ongoing compliance with all applicable performance standards and specifications, and shall comply with all warranty requirements in section 16.5 of the Certification Procedure. Phil-Tite or other manufacturers may specify that the warranty is contingent upon the use of trained installers.

IT IS FURTHER ORDERED that the certified Phil-Tite system shall be installed, operated and maintained in accordance with the **ARB-Approved Installation, Operation and Maintenance Manual for the Phil-Tite Phase I Vapor Recovery System** as certified by Executive Order VR-101-I. A copy of this Executive Order and manual shall be maintained at each GDF where a certified Phil-Tite system is installed.

IT IS FURTHER ORDERED that equipment listed in Exhibit 1, unless exempted, shall be clearly identified by a permanent identification showing the manufacturer's name and model number.

IT IS FURTHER ORDERED that any alteration in the equipment, parts, design, installation or operation of the system certified hereby is prohibited and deemed inconsistent with this certification unless the alteration has been submitted in writing and approved in writing by the Executive Officer or Executive Officer's delegate.

IT IS FURTHER ORDERED that the following requirements be made a condition of certification. The owner or operator of the Phil-Tite system shall conduct, and pass, the following tests no later than 60 days after startup and at least once every three (3) years after startup testing, using the following test procedures: **TP-201.3, Determination of 2 Inch WC Static Pressure Performance of Vapor Recovery Systems of Dispensing Facilities (March 17, 1999)**, **TP-201.1B, Static Torque of Rotatable Phase I Adaptors (October 8, 2003)** and depending on the system configuration, either **TP-201.1D, Leak Rate of Drop Tube Overfill Prevention Device and Spill Container Drain Valve (October 8, 2003)**; or **TP-201.1C, Leak Rate of Drop Tube/Drain Valve Assembly (October 8, 2003)**. Shorter time periods may be specified in accordance with local district requirements. Notification of testing, and submittal of test results, shall be done in accordance with local district requirements and pursuant to the policies established by that district. Alternative test procedures, including the most recent versions of the test procedures listed above, may be used if determined by the Executive Officer or Executive

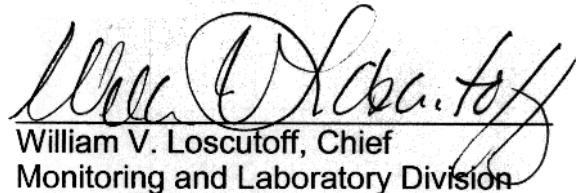
Officer delegate, in writing, to yield comparable results. Testing the Pressure/Vacuum (P/V) Vent valve will be at the option of the local districts. If P/V valve testing is required by the district, the test shall be conducted in accordance with **TP-201.1E, Leak Rate and Cracking Pressure of Pressure/Vacuum Vent Valves (October 8, 2003)** and Exhibit 2.

IT IS FURTHER ORDERED that the Phil-Tite system shall be compatible with gasoline in common use in California at the time of certification. Any modifications to comply with future California gasoline requirements shall be approved in writing by the Executive Officer or Executive Officer delegate.

IT IS FURTHER ORDERED that the certification of the Phil-Tite Phase I Vapor Recovery System is valid through June 30, 2008 to provide more time for the Executive Officer or Executive Officer delegate to gather and evaluate information.

IT IS FURTHER ORDERED that Executive Order VR-101-H issued on November 22, 2006, is hereby superseded by this Executive Order. Phil-Tite Phase I Vapor Recovery Systems certified under Executive Orders VR-101-A to H may remain in use at existing installations. This Executive Order shall apply to new installations or major modification of the Phase I system of existing gasoline dispensing facilities.

Executed at Sacramento, California, this 22<sup>nd</sup> day of June 2007.

  
William V. Loscutoff, Chief  
Monitoring and Laboratory Division