


Delivers the ultimate in flexibility.

- All stainless steel construction.
- Stand base mounts directly to concrete end tabs for added stability/bracket security.
- Incorporate any of Benecor's pumps (excluding submersible) for use as a pumping system
- Standard 20' hose (other sizes available).
- Optional Flow Meter available.

Construction

Dimensions	17" W x 49" H x 17" D
------------	-----------------------

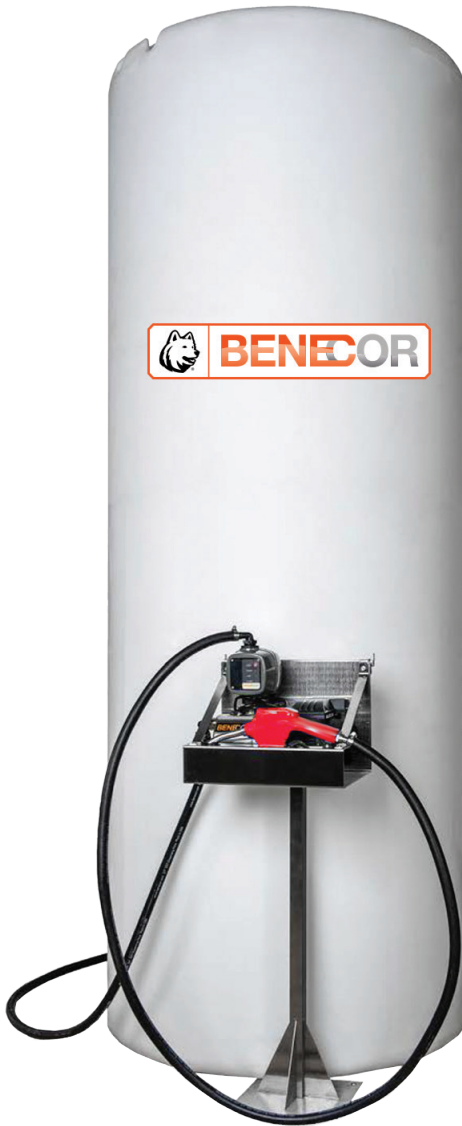

**BENECOR**

DEF DISPENSING AND STORAGE

BULK Flexstand Dispensers**Delivers the ultimate in flexibility.****Dimensions and System Options****DEF Flow Meter**

DESCRIPTION

Maximum Flow Rate	31.7 G/Min
Precision	±1% within the Flow Range
Working Temperature	14° F to 122° F (=10° C to 50° C)
Repetitiveness	0.2%
Loss of Pressure	<0.15 bar



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

