

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Models 003360 and 003385

- Retains UL listing after reconnection.
- Features a pre-loaded spring and a single turn wave spring that enables valve to resist sudden pressure build-up in the hose causing nuisance separations.
- Separates at less than 200 lbf / 889.6 N which minimizes “backlash” force of separation, reducing damage to equipment.

Model 005230

- Retains UL listing after reconnection.
- Uses the same pre-loaded spring and a single turn wave spring as Model 003360.

- Separates at less than 115 lbf / 511.5 N.

Model 002273 and 002774

- Light-weight, inexpensive and disposable.
- Same instant-closing dual poppet check valve design as Model 003360.
- Separates at less than 300 lbf / 1334.4 N.

Model 006130

- Internal Pressure Compensating Chamber (PCC) that prevents “line shock” nuisance separations.
- Same instant-closing dual poppet check valve as Model 003360.
- Separates at less than 225 lbf / 1000.8 N.

Reconnectable with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
003360**	¾" F x ¾" F Reconnectable Safe-T-Break® with scuff guard	0.59 (0.26)
005230**	¾" F x ¾" F Reconnectable Low-Pull Safe-T-Break® with scuff guard	0.59 (0.26)

Non-reconnectable with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
002273	¾" F x ¾" F Non-Reconnectable Safe-T-Break®	0.78 (0.35)
006130**	¾" F x ¾" F PCC Non-Reconnectable Safe-T-Break® with scuff guard	0.52 (0.23)

Reconnectable with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
003385**	¾" F x ¾" F Reconnectable Safe-T-Break® with scuff guard	0.57 (0.25)

Non-reconnectable with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
002774	¾" F x ¾" F Non-Reconnectable Safe-T-Break®	0.73 (0.33)
002774A*	¾" F x ¾" F Non-Reconnectable Safe-T-Break® - Atex	0.73 (0.33)

**See page 2 for guard color options




Construction

RECONNECTABLE SAFE-T-BREAKS®

Body	Aluminum
Seals	Fluorocarbon
Springs	Stainless Steel Stainless steel load and latch spring reverse mechanism Hardened stainless steel latch ring and balls

NON-RECONNECTABLE SAFE-T-BREAKS®

Body	Zinc Alloys and Aluminum
------	--------------------------

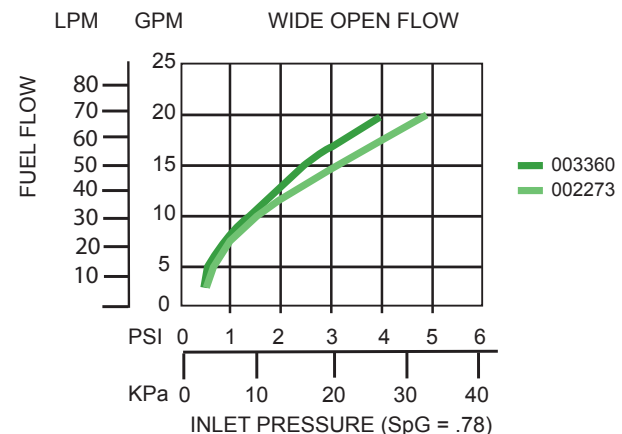

0518
II 1 G
EN 13617-2



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions and System Options

Whip Hoses

MODEL NO.	DESCRIPTION
NPT	
002274	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose
227374	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose connected to Model 002273 ¾" F x ¾" F Non-Reconnectable Safe-T-Break®
BSP	
002275	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose with Swivel Nut
227375**	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose with Swivel Nut connected to Model 002273 ¾" F x ¾" F Non-Reconnectable Safe-T-Break®
336074**	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose connected to Model 003360 ¾" F x ¾" F Reconnectable Safe-T-Break®
336075**	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose with Swivel Nut connected to Model 003360 ¾" F x ¾" F Reconnectable Safe-T-Break®
BSP	
002775	¾" M x ¾" M (19 mm M x 19 mm M) Whip Hose

Guards

MODEL NO.	DESCRIPTION
003096**	Scuff Guard for Model 003360, 006130 and 005230
006503**	Dispenser Scuff Guard for Model 002273 and 002774

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup
003813	Safe-T-Break® Demonstration Kit




Color Chart

COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20

**Safe-T-Breaks® and Safe-T-Break® Scuff Guards are to be ordered with the corresponding guard color option added to the model number.

Example: If BLUE guards are desired, add guard color option -01 to the model number (004034-01).

For custom colors, a minimum order of 4,000 guards will be required.

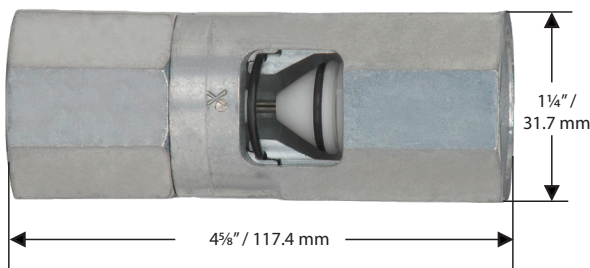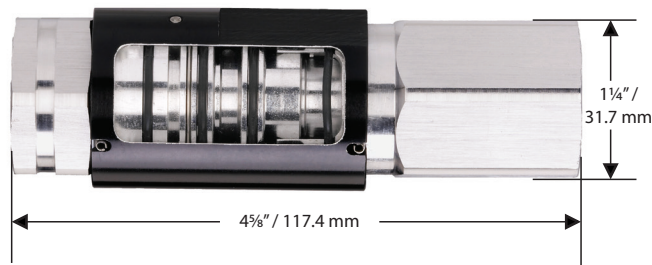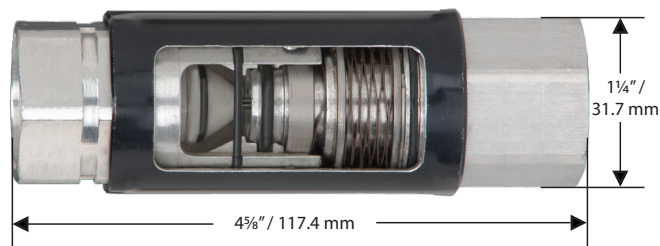

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.