


### Softwall Gasoline Pump Hose.

- A lightweight, flexible hose for use when a hardwall hose is inappropriate.
- Recommended for all gasoline and gasoline/Ethanol blends at Ethanol levels designated as “gasohol” (E10 maximum or less), diesel fuel and diesel fuel/biodiesel blends with nominal biodiesel concentrations up to 5% (B0-B5), kerosene and fuel oil (heating oil), leaded and unleaded gasoline.
- Excellent strength without sacrificing flexibility.
- Highly resistant to cuts, abrasions, sun and weather.
- Smooth cover will not mark or scratch vehicle finishes.
- All curb pump hose assemblies are 100% pressure tested, inspected for electrical continuity and sample pull tested.

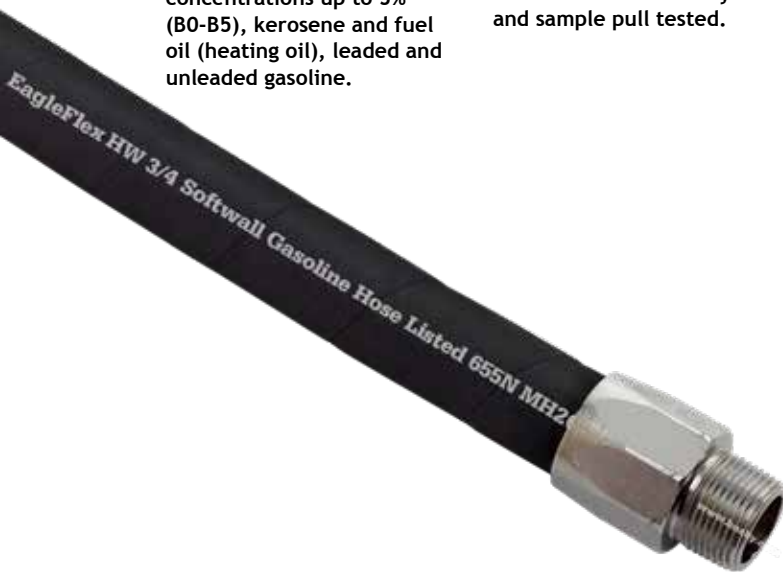

### Softwall Hoses

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
<b>3/4" HOSES</b>		
CP12SW04X	3/4" Softwall 4' Assembly Hose Bulk	1.4 (0.6)
CP12SW09	3/4" Softwall 9' Assembly Hose	3.1 (1.4)
CP12SW10	3/4" Softwall 10' Assembly Hose	3.4 (1.5)
CP12SW10X	3/4" Softwall 10' Assembly Hose Bulk	3.4 (1.5)
CP12SW12	3/4" Softwall 12' Assembly Hose	4.1 (1.9)
CP12SW14	3/4" Softwall 14' Assembly Hose	4.8 (2.2)
CP12SW14X	3/4" Softwall 14' Assembly Hose Bulk	4.8 (2.2)
CP12SW17	3/4" Softwall 17' Assembly Hose	5.8 (2.6)
CP12SW20	3/4" Softwall 20' Assembly Hose	6.8 (3.1)
CP12SW30	3/4" Softwall 30' Assembly Hose	10.2 (4.6)
CP12SW40	3/4" Softwall 40' Assembly Hose	13.6 (6.2)
CP12SW50	3/4" Softwall 50' Assembly Hose	17.0 (7.7)
CP12SW9.5	3/4" Softwall 9.5' Assembly Hose	3.2 (1.5)
<b>1" HOSES</b>		
CP16SW10	1" Softwall 10' Assembly Hose	4.7 (2.1)
CP16SW11	1" Softwall 11' Assembly Hose	5.2 (2.4)
CP16SW12	1" Softwall 12' Assembly Hose	5.6 (2.5)
CP16SW14	1" Softwall 14' Assembly Hose	6.6 (3.0)
CP16SW14X	1" Softwall 14' Assembly Hose Bulk	6.6 (3.0)
CP16SW17	1" Softwall 17' Assembly Hose	8.0 (3.6)
CP16SW20	1" Softwall 20' Assembly Hose	9.4 (4.3)
CP16SW20X	1" Softwall 20' Assembly Hose Bulk	9.4 (4.3)
CP16SW60	1" Softwall 60' Assembly Hose	28.2 (12.8)

### Construction

Tube	Black Nitrile
Cover	Black CPE (chlorinated polyethylene), smooth finish
Reinforcement	Multiple textile braids static wire
Temperature Range	-40° F to +180° F (-40° C to +82° C)





# EagleFlex® Softwall

**Softwall Gasoline Pump Hose.**

## System Options

### Available in these Sizes

ID	NOM OD		MAX WP		WEIGHT		
Size	MM	IN	MM	PSI	MPA	LB/FT	KG/M
3/4"	19	1.10	28	150	1.03	0.34	0.51
1"	25	1.39	35	150	1.03	0.47	0.63

### Couplings

Permanent internally expanded fixed 3/4" and 1" male NPT chrome plated brass or external crimp zinc (L type).

Swivel couplings are not available with softwall hose.



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.