

### Inline SAFE-T-BREAK®.


- Threads directly into nozzle inlet.
- Separates at 180-337 lbs (800-1500N).
- Reconnectable.
- Stops flow on hose side of break.
- Separates at angles up to 90 degrees.
- Aluminum internal flow director - stronger than Elaflex plastic design.
- Check valve o-ring to ensure reliable fuel shut-off, not included on Elaflex.

### New Inline SAFE-T-BREAK®

| MODEL NO. | DESCRIPTION          | SHIPPING WEIGHT LBS (KG) |
|-----------|----------------------|--------------------------|
| 008521A   | Inline Safe-T-Break® | .45 (.20)                |

### Construction

|         |              |
|---------|--------------|
| Body    | Aluminum     |
| Seals   | Fluorocarbon |
| Threads | M34 x 1.5    |

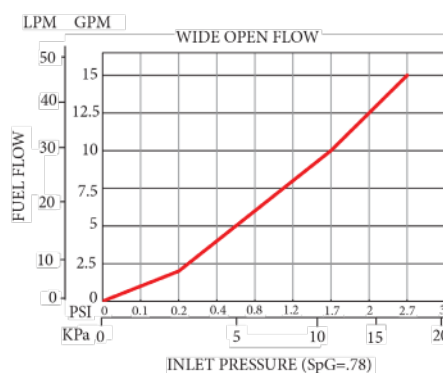


II 1 G  
EN13617  
Type 2



WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Inline SAFE-T-BREAK®.

## Dimensions

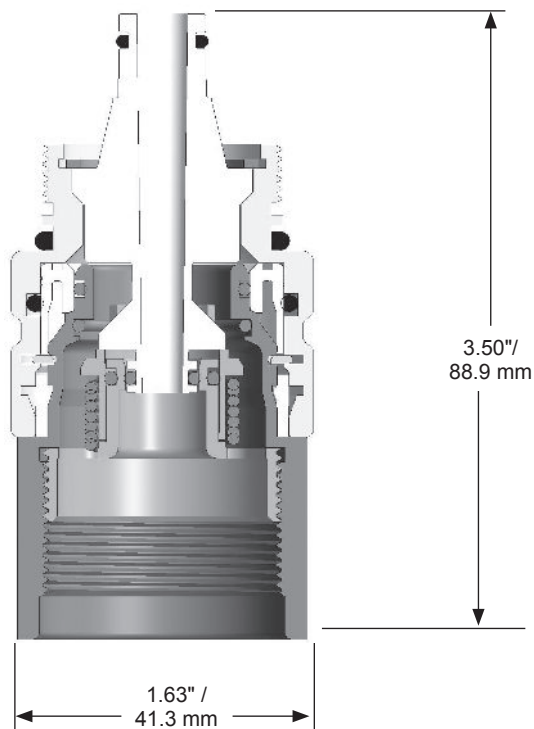

2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.

