

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Model 3360VR

- Reconnectable Safe-T-Break® for balance vapor recovery systems - coaxial hoses with fuel on the “inside”, vapor return on the “outside”.
- Unique in-line latching mechanism requires less force to reconnect Safe-T-Break® after a separation.
- Unique vapor valve stops vapors from escaping after a drive away.
- Separates at less than 200 lbf / 889.6 N to minimize backlash damage.
- Patented wave spring design minimizes nuisance breaks.

Model 005900

- Non-reconnectable Safe-T-Break® for balance vapor recovery systems - coaxial hoses with fuel on the “inside”, vapor return on the “outside”.
- Internal pressure compensating chamber isolates shear pin from line shock preventing nuisance breaks.
- Separates at less than 250 lbf / 1112.1 N to minimize backlash damage.
- Same built-in vapor valve as Model 3360VR.

Reconnectable

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
3360VR**	Reconnectable Safe-T-Break®	1.3 (.5)

Non-reconnectable

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
005900**	Non-Reconnectable Safe-T-Break®	1.2 (.5)

**See page 2 for guard color options

Construction


Body	Aluminum
Seals	Fluorocarbon
Springs	Stainless Steel
Threads	1 1/8" x 12
Stainless steel load and latch spring reverse mechanism Hardened stainless steel latch ring and balls	



Model 3360VR



Model 005900

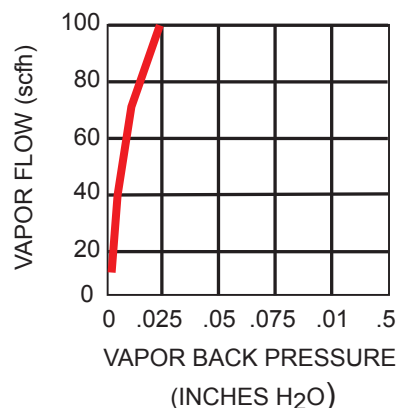

California Environmental Protection Agency
AIR RESOURCES BOARD



Texas Commission on
Environmental Quality



Missouri Department of
Natural Resources



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Dimensions and System Options

Guards

MODEL NO.	DESCRIPTION
003990**	Scuff Guard for 3360VR Safe-T-Break®
005895**	Scuff Guard for 005900 Safe-T-Break®

Accessories, Maintenance, and Testing

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup

Color Chart


COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20

**Safe-T-Breaks® and Safe-T-Break® Scuff Guards are to be ordered with the corresponding guard color option added to the model number.

Example: If BLUE guards are desired, add guard color option -01 to the model number (004034-01).

For custom colors, a minimum order of 4,000 guards will be required.

Model 3360VR

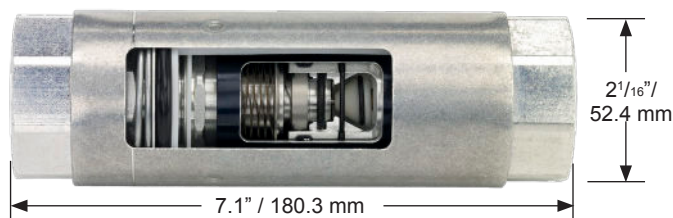

Model 005900



2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

