

Inline Swivels



For standard fueling applications.

Model 003895



Features

All Husky® Inline Swivels

- Compatible with unleaded, diesel, and Ethanol blends through E10.
- Compact and light weight for easy handling.
- High flow rates due to laminar flow design.
- High strength step shoulder bearing diameters and impact absorbing stops.

All Weather Swivels

- Inline, full 360° cylindrical rotation for easy movement of nozzle.
- Double o-ring seals at each swivel provide long life at low temperatures (-40° F/C).

Construction

Body: Aluminum

Inner O-ring: Fluorocarbon

Outer O-ring: Fluorosilicone

Model No.	Size	Thread	Type	Shipping Wt. Lbs/Kg
003895	3/4" M x 3/4" F	NPT	Single Plane Swivel	1.4/.65
003898	3/4" M x 1" F	NPT	Single Plane Swivel	1.4/.65
008517	1" M x 1" F	NPT	Single Plane Swivel	1.4/.65
003753	3/4" M x 3/4" F	BSPP	Single Plane Swivel	1.4/.65
003760	3/4" M x 1" F	BSPP	Single Plane Swivel	1.4/.65
003830	1" M x 1" F	BSPP	Single Plane Swivel	1.4/.65




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



For standard fueling applications.

Dimensions

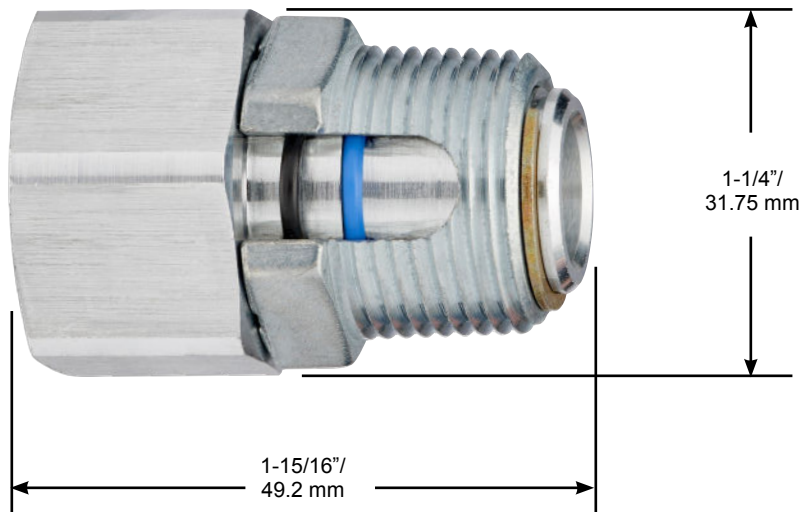

2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE 