XS[®] EZ Lever PHG Nozzles



Pressure activated, automatic shut-off nozzle for full-service and self-service stations.

- XS® nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- · Stainless steel spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- · Comes standard with smooth full grip guard.
- · 2-piece lever is easier
- requires 1/2 the force to open nozzle.
- ADA compliant.



New Unleaded Nozzles

MODEL	DESCRIPTION SHIPPING WEIGHT I	LBS (KG)
1163504	with Two Notch Hold Open Clip	3.1 (1.4)
1163508	without Hold Open Clip	3.1 (1.4)
1163504N^	with Two Notch Hold Open Clip	3.1 (1.4)
1163544	with Two Notch Hold Open Clip, Waffle Splash Guard and Flo-Equalizer®	3.1 (1.4)
1163554N^	with Two Notch Hold Open Clip and Flo-Equalizer®	3.1 (1.4)
1163559	with Two Notch Hold Open Clip and Waffle Splash Guard	3.1 (1.4)
1163566	without Hold Open Clip, with Waffle Splash Guard	3.1 (1.4)
1163582	with Two Notch Hold Open Clip, Waffle Splash Guard and Drip Less Spout	3.1 (1.4)
1163595	with Two Notch Hold Open Clip, POPD® S and Waffle Splash Guard	3.1 (1.4)
11635108	without Hold Open Clip, with POPD® S and Waffle Splash Guard	3.1 (1.4)
11635126	without Hold Open Clip, with POPD® S Full Grip Guard	3.1 (1.4)
11635146	with Two Notch Hold Open Clip, POPD® H and Waffle Splash Guard	3.1 (1.4)
11635214N^	with Two Notch Hold Open Clip and Long Spout	3.1 (1.4)
E1163504	with Two Notch Hold Open Clip and Mate Guard	3.1 (1.4)
E1163504N^	with Two Notch Hold Open Clip and Mate Guard	3.1 (1.4)
E1163508	without Hold Open Clip, with Mate Guard	3.1 (1.4)
E1163543	with Single Notch Hold Open Clip, Waffle Splash Guard and Mate Guard	3.1 (1.4)
E1163559	with Two Notch Hold Open Clip, Waffle Splash Guard and Mate Guard	3.1 (1.4)
E1163566	without Hold Open Clip, with Waffle Splash Guard and Mate Guard	3.1 (1.4)
E1163582	with Two Notch Hold Open Clip, Waffle Splash Guard, Drip Less Spout and Mate Guard	3.1 (1.4)
E11635246	without Hold Open Clip, Waffle Splash Guard, Drip Less Spout and Mate Guard	3.1 (1.4)

New Light Duty Diesel Nozzles

MODEL	DESCRIPTION SHIPPING WEIGH	T LBS (KG)
1163503	with Two Notch Hold Open Clip	3.1 (1.4)
1163503N^	with Two Notch Hold Open Clip	3.1 (1.4)
1163507	without Hold Open Clip	3.1 (1.4)
1163553N^	with Two Notch Hold Open Clip and Flo-Equalizer®	3.1 (1.4)
1163561	with Two Notch Hold Open Clip and Waffle Splash Guard	3.1 (1.4)
1163567	without Hold Open Clip, with Waffle Splash Guard	3.1 (1.4)
1163596	with Two Notch Hold Open Clip, POPD® S and Waffle Splash Guard	3.1 (1.4)
11635109	without Hold Open Clip, with POPD® S and Waffle Splash Guard	3.1 (1.4)
11635211	with Two Notch Hold Open Clip, Waffle Splash Guard and Drip Less Spout	3.1 (1.4)
11635270	without Hold Open Clip, with POPD® S Full Grip Guard	3.1 (1.4)
11635215N^	with Two Notch Hold Open Clip and Long Spout	3.1 (1.4)
E1163503	with Two Notch Hold Open Clip and Mate Guard	3.1 (1.4)
E1163507	without Hold Open Clip, with Mate Guard	3.1 (1.4)
E1163597	with Single Notch Hold Open Clip, Waffle Splash Guard and Mate Guar	d 3.1 (1.4)
E1163561	with Two Notch Hold Open Clip, Waffle Splash Guard and Mate Guard	3.1 (1.4)
E1163567	without Hold Open Clip, with Waffle Splash Guard and Mate Guard	3.1 (1.4)
E11635211	with Two Notch Hold Open Clip, Waffle Splash Guard, Drip Less Spout and Mate Guard	3.1 (1.4)
E11635247	with Hold Open Clip, Waffle Splash Guard, Drip Less Spout and Mate Guard	3.1 (1.4)
	^N	OT LISTED

^NOT LISTED

CONSTRUCTION


Body	Die cast aluminum with polymer handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	Polymer lever
Inlet	3/4" / 19 mm NPT







WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov





Pressure activated, automatic shut-off nozzle for full-service and self-service stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
003360	¾" F x ¾" F NPT Reconnectable Safe-T-Break®
002273	¾" F x ¾" F NPT Non-Reconnectable Safe-T-Break®
006130	¾" F x ¾" F NPT Non-Reconnectable PCC Safe-T-Break®
005230	¾" F x ¾" F NPT Low Pull Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
000350	¾" M x ¾" F NPT Multi-Plane Swivel
000355	¾" M x ¾" F NPT Multi-Plane Swivel Anodized Black
002272	¾" M x ¾" F NPT 90° Pump Swivel
003895	¾" M x ¾" F NPT Inline Swivel
002950	¾" M x ¾" F NPT Multi-Plane Restricted Swivel

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	34" M NPT Multi-Plane Swivel connected to 34" F NPT Reconnectable Safe-T-Break®

Spouts


MODEL NO.	DESCRIPTION
001473	Unleaded Spout without Flo-Stop®
010434	Unleaded Long Spout without Flo-Stop®
001471	Light Duty Diesel Spout without Flo-Stop® with StreamShaper®
010353	Light Duty Diesel Long Spout without Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
004490	Conventional Flo-Equalizer® - 10 gpm / 37.9 Lpm
003593	Hold Open Clip Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm
007089	Nozzle Service Kit
000397	Unleaded Spout Gauge

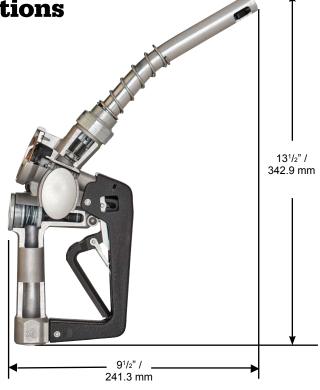

Guards

MODEL NO.	DESCRIPTION
003376	Black Handle Guard
004145	Full Grip Guard
001806	Full Grip Reguard
005494	Lever Guard
003440	Mate Easy-on Package
003795	Mate Guard
008176	POPD® EZH Nozzle Guard
008175	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008185	POPD® H Full Grip Guard
008192	POPD® H Full Grip Reguard
008166	POPD® H Mate Guard
006628	POPD® S Clear Cover
006665	POPD® S Full Grip Guard
007205	POPD® S Full Grip Reguard
008165	POPD® S Mate Guard
001506	Protection Package
001809	Reguard Protection Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com

