


Premium Hardwall Gasoline Pump Hose.

- Recommended anywhere a hardwall hose is required.
- Resists kinking and eliminates meter creep.
- Recommended for all gasoline and gasoline/Ethanol blends at Ethanol levels designated as “gasohol” (E15 maximum or less), diesel fuel and diesel fuel/biodiesel blends with nominal biodiesel concentrations up to 20% (B0-B20), kerosene and fuel oil (heating oil), leaded and unleaded gasoline.
- Improves ozone and abrasion resistance while providing increased life.
- Designed for durability, flexibility, and easy handling.
- Improves draping and handling characteristics.
- Highly resistant to cuts, abrasions, sun and weather.
- Will not mark or scratch vehicle finishes.
- Hose material is private branded and UL Listed to UL 330 and CAN/ULC-S612-99.
- All curb pump hose assemblies are 100% pressure tested, inspected for electrical continuity and sample pull tested.

(See page two for coupling descriptions)

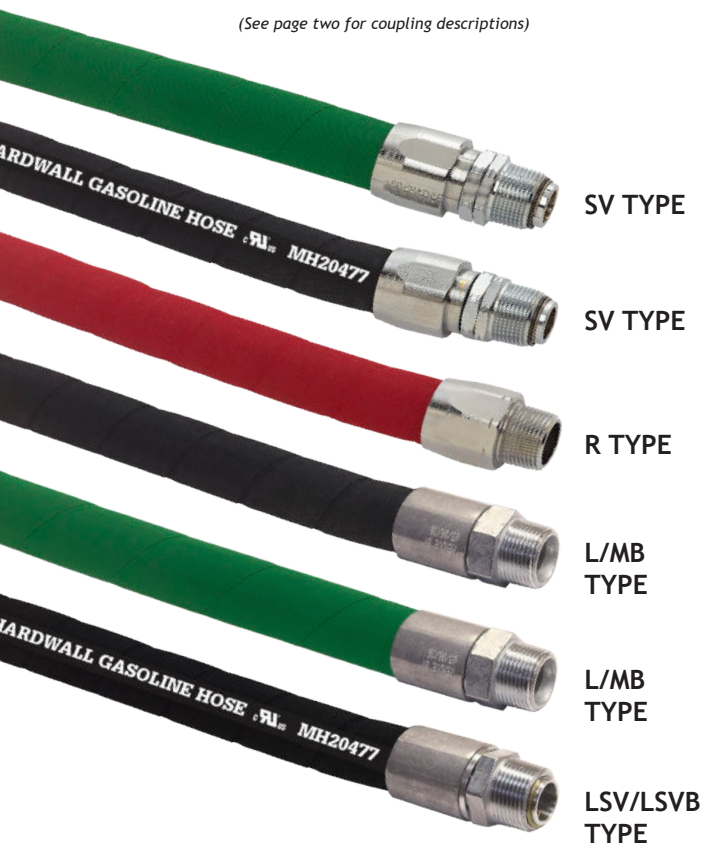

Hardwall Hoses

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
5/8" HOSES		
CP10HW09	5/8" Hardwall 9' Assembly Hose	3.5 (1.6)
3/4" HOSES		
CP12HWG08	3/4" GreenHardwall 8' Assembly Hose	3.8 (1.7)
CP12HWG09	3/4" Green Hardwall 9' Assembly Hose	4.2 (1.9)
CP12HWG10	3/4" Green Hardwall 10' Assembly Hose	4.7 (2.1)
CP12HWG12SV	3/4" Green Hardwall 12' Assembly Hose Swivel	5.6 (2.5)
CP12HW09	3/4" Hardwall 9' Assembly Hose	4.2 (1.9)
CP12HW09.5	3/4" Hardwall 9.5' Assembly Hose	4.5 (2.0)
CP12HW09SV	3/4" Hardwall 9' Assembly Hose Swivel	4.2 (1.9)
CP12HW12	3/4" Hardwall 12' Assembly Hose	5.6 (2.5)
CP12HW14	3/4" Hardwall 14' Assembly Hose	6.6 (3.0)
CP12HW17	3/4" Hardwall 17' Assembly Hose	8.0 (3.6)
CP12HW14L	3/4" Hardwall 14' Assembly Hose	6.6 (3.0)
CP12HWR14L	3/4" Hardwall 14' Assembly Hose	6.6 (3.0)
CP12HW14LSV	3/4" Hardwall 14' Assembly Hose	6.6 (3.0)

1" HOSES

CP16HW01	1" Hardwall 1' Assembly Hose	0.64 (0.95)
CP16HW06	1" Hardwall 6' Assembly Hose	3.8 (1.7)
CP16HW10	1" Hardwall 10' Assembly Hose	6.4 (2.9)
CP16HW10X	1" Hardwall 10' Assembly Hose Bulk	6.4 (2.9)
CP16HW15	1" Hardwall 15' Assembly Hose	9.6 (4.4)
CP16HW15X	1" Hardwall 15' Assembly Hose Bulk	9.6 (4.4)
CP16HW17	1" Hardwall 17' Assembly Hose	10.9 (4.9)
CP16HW20X	1" Hardwall 20' Assembly Hose Bulk	12.8 (5.8)

Construction

Tube	Black Nitrile
Cover	Black CPE (chlorinated polyethylene), wrap impression
Reinforcement	Multiple textile braids with dual static wire helix
Temperature Range	-40° F to +180° F (-40° C to +82° C)
Body	3/4" Green Hardwall Available



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Husky**

GENERAL FUELING PRODUCTS

EagleFlex® Hardwall**Premium Hardwall Gasoline Pump Hose.**

System Options

Available in these Sizes

Size	ID		NOM OD		MAX WP		WEIGHT	
	MM	IN	MM	IN	PSI	MPA	LB/FT	KG/M
5/8"	16	1.03	26	1.03	150	1.03	0.39	0.58
3/4"	19	1.17	30	1.17	150	1.03	0.47	0.70
1"	25	1.45	37	1.45	150	1.03	0.64	0.95

Couplings

Permanent internally expanded fixed chrome plated brass or external crimp zinc (L type).

Reattachable fixed (R type) and reattachable swivel (SV type) 3/4" and 1" male NPT. UL does not recognize field installation of reattachable fittings.

External crimp zinc swivel 3/4" and 1" male NPT one side, fixed other side (L SV type) or swivel 3/4" male BSPP, fixed NPT other side (L SVB type).

External crimp zinc swivels on both sides (L SV SV, L SV SVB, or L SVB SVB type).

External crimp aluminum 1" male BSPP both ends (MB type).

External crimp aluminum 1" male BSPP one end, external crimp unplated zinc 1" male NPT other end (L MB type).



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.