


Wirebraid Gasoline Pump Hose.

- Recommended anywhere a hardwall or softwall hose is appropriate.
- Recommended for all gasoline and gasoline/Ethanol blends at Ethanol levels designated as “gasohol” (E15 maximum or less), diesel fuel and diesel fuel/biodiesel blends with nominal biodiesel concentrations up to 20% (B0-B20), kerosene and fuel oil (heating oil), leaded and unleaded gasoline.
- Resistant to crushing and stands up to run-over.
- Highly resistant to cuts, abrasions, sun and weather.
- Flexibility of a softwall, durability of a hardwall.
- Assures accurate readings at the pump.
- Will not mark or scratch vehicle finishes.
- Hose material is private branded and UL Listed to UL 330 and CAN/ULC-S612-99.
- All curb pump hose assemblies are 100% pressure tested, inspected for electrical continuity and sample pull tested.

(See page two for coupling descriptions)

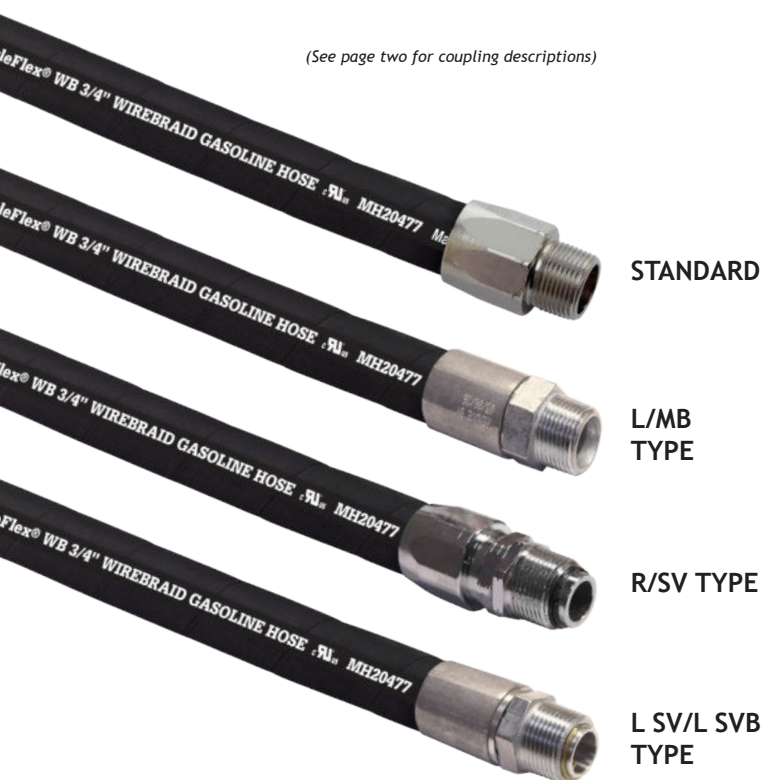

Wirebraid Hoses

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
5/8" HOSES		
CP10WB08	5/8" Wirebraid 8' Assembly Hose	2.8 (1.3)
CP10WB09	5/8" Wirebraid 9' Assembly Hose	3.2 (1.4)
CP10WB09.5	5/8" Wirebraid 9.5' Assembly Hose	3.3 (1.5)
CP10WB10	5/8" Wirebraid 10' Assembly Hose	3.5 (1.6)
CP10WB14	5/8" Wirebraid 14' Assembly Hose	4.9 (2.2)
3/4" HOSES		
CP12WB04	3/4" Wirebraid 4' Assembly Hose	1.7 (0.8)
CP12WB05	3/4" Wirebraid 5' Assembly Hose	2.1 (1.0)
CP12WB06	3/4" Wirebraid 6' Assembly Hose	2.5 (1.1)
CP12WB08	3/4" Wirebraid 8' Assembly Hose	3.4 (1.5)
CP12WB09	3/4" Wirebraid 9' Assembly Hose	3.8 (1.7)
CP12WB09SV	3/4" Wirebraid 9' Assembly Hose Swivel	3.8 (1.7)
CP12WB10	3/4" Wirebraid 10' Assembly Hose	4.2 (1.9)
CP12WB12	3/4" Wirebraid 12' Assembly Hose	5.0 (2.3)
CP12WB12SV	3/4" Wirebraid 12' Assembly Hose Swivel	5.0 (2.3)
CP12WB12X	3/4" Wirebraid 12' Assembly Hose Bulk	5.0 (2.3)
CP12WB14	3/4" Wirebraid 14' Assembly Hose	5.9 (2.7)
CP12WB15SV	3/4" Wirebraid 15' Assembly Hose Swivel	6.3 (2.9)
CP12WB16	3/4" Wirebraid 16' Assembly Hose	6.7 (3.0)
CP12WB20	3/4" Wirebraid 20' Assembly Hose	8.4 (3.8)
CP12WB14L	3/4" Wirebraid 14' Assembly Hose	5.9 (2.7)
CP12WB14SV	3/4" Wirebraid 14' Assembly Hose Swivel	5.9 (2.7)
CP12WB14LSV	3/4" Wirebraid 14' Assembly Hose Swivel	5.9 (2.7)

1" HOSES

CP16WB04	1" Wirebraid 4' Assembly Hose	2.0 (0.9)
CP16WB06	1" Wirebraid 6' Assembly Hose	3.0 (1.4)
CP16WB08	1" Wirebraid 8' Assembly Hose	4.0 (1.8)
CP16WB09	1" Wirebraid 9' Assembly Hose	4.5 (2.0)
CP16WB10	1" Wirebraid 10' Assembly Hose	5.0 (2.3)
CP16WB10X	1" Wirebraid 10' Assembly Hose Bulk	5.0 (2.3)
CP16WB100SV	1" Wirebraid 100' Assembly Hose Swivel	50.0 (22.7)
CP16WB12	1" Wirebraid 12' Assembly Hose	6.0 (2.7)
CP16WB12SV	1" Wirebraid 12' Assembly Hose Swivel	6.0 (2.7)
CP16WB13	1" Wirebraid 13' Assembly Hose	6.5 (3.0)
CP16WB14	1" Wirebraid 14' Assembly Hose	7.0 (3.2)
CP16WB14X	1" Wirebraid 14' Assembly Hose Bulk	7.0 (3.2)
CP16WB16	1" Wirebraid 16' Assembly Hose	8.0 (3.6)
CP16WB18	1" Wirebraid 18' Assembly Hose	9.0 (4.1)
CP16WB18X	1" Wirebraid 18' Assembly Hose Bulk	9.0 (4.1)
CP16WB20	1" Wirebraid 20' Assembly Hose	10.0 (4.5)
CP16WB20X	1" Wirebraid 20' Assembly Hose Bulk	10.0 (4.5)
CP16WB30	1" Wirebraid 30' Assembly Hose	15.0 (6.8)
CP16WB50SV	1" Wirebraid 50' Assembly Hose Swivel	25.0 (11.3)

Construction

Tube	Black Nitrile
Cover	Black CPE (chlorinated polyethylene), wrap impression
Reinforcement	One wirebraid with full diameter grounding sheath
Temperature Range	-40° F to +180° F (-40° C to +82° C)



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Husky

GENERAL FUELING PRODUCTS

EagleFlex® Wirebraid

Wirebraid Gasoline Pump Hose.

System Options

Available in these Sizes

Size	ID		NOM OD		MAX WP		WEIGHT	
	MM	IN	MM	IN	PSI	MPA	LB/FT	KG/M
5/8"	16	0.97	25	1.00	150	1.03	0.35	0.52
3/4"	19	1.10	28	1.10	150	1.03	0.42	0.63
1"	25	1.34	34	1.34	150	1.03	0.50	0.74

Couplings

Permanent internally expanded fixed chrome plated brass (X type) or external crimp zinc (L type).

Reattachable fixed (R type) and reattachable swivel (SV type) 3/4" and 1" male NPT. UL does not recognize field installation of reattachable fittings.

External crimp zinc swivel 3/4" and 1" male NPT (L SV type) or 3/4" male BSPP (L SVB type).



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.