Whip Low Perm Hoses




- Recommended anywhere a hardwall hose is required.
- Recommended for all gasoline and gasoline/
 Ethanol blends at Ethanol levels designated as "gasohol" (E10 maximum or less), diesel fuel and diesel fuel/biodiesel blends with nominal biodiesel concentrations up to 5% (B0-B5), kerosene and fuel oil (heating oil), leaded and unleaded gasoline where low permeation (≤10g/m²/day) is required.
- Designed for durability, flexibility, and easy handling.

- Highly resistant to cuts, abrasions, sun and weather.
- Resists kinking and eliminates meter creep.
- Improves ozone and abrasion resistance while providing increased life.
- Will not mark or scratch dispenser finishes.
- Hose material is private branded and UL Listed to UL 330 for low permeation.

 All curb pump hose assemblies are 100% pressure tested, inspected for electrical continuity and sample pull tested.

Whip Low Perm Hoses

MODEL NO.	DESCRIPTION SHIPPING WEIGH	IT LBS (KG)						
5/8" LP HOSES								
CP10LP.75	5/8" Low Perm Hardwall 9" Assembly Hose	0.72 (0.3)						
CP10LP.75SV	5/8" Low Perm Hardwall 9" Swivel Assembly Hose	0.72 (0.3)						
3/4" LP HOSES								
CP12LP.75	3/4" Low Perm Hardwall 9" Assembly Hose	1.00 (0.5)						
CP12LP.75SV	3/4" Low Perm Hardwall 9" Swivel Assembly Hose	1.00 (0.5)						
1" LP HOSES	;							
CP16LP.75	1" Low Perm Hardwall 9" Assembly Hose	1.20 (0.5)						
CP16LP.75SV	1" Low Perm Hardwall 9" Swivel Assembly Hose	1.20 (0.5)						

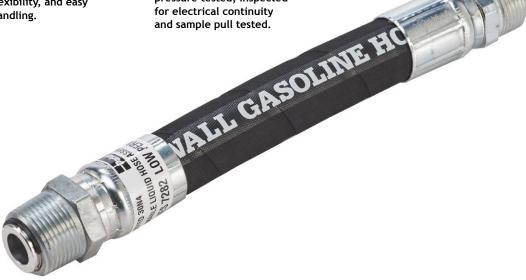









Whip Low Perm Hoses

System Options

Available in these Sizes

ID		NOM OD		MAX WP		WEIGHT	
Size	мм	IN	мм	PSI	MPA	LB/FT	KG/M
5/8"	16	1.03	26	150	1.03	0.37	0.55
3/4"	19	1.17	30	150	1.03	0.44	0.65
1"	25	1.45	37	150	1.03	0.59	0.88

Couplings

Permanent, external crimp, zinc plated steel couplings, fixed and swivel





