1GS Rebuilt Nozzles



Automatic shut-off nozzle with polymer handguard for farm, 12V skid tanks, large pumps with or without air eliminators and commercial applications.

- 1GS nozzle shuts off when the gas tank is full.
- · Not for use with gravity
- · Nozzle is equipped with unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- tanks. Not legal for retail
- dispensing applications.

Rebuilt Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT L	.BS (KG)
078604N^	with Three Notch Hold Open Clip	and Hook	3.6 (1.6)
0786209N^	with Three Notch Hold Open Clip	, Hook and Reducer	
	Bushing	3	3.6 (1.6)
		^ NC	DT LISTED

Rebuilt Light Duty Diesel Nozzles


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT	LBS (KG)
078603N^	with Three Notch Hold Open Clip	and Hook	3.6 (1.6)
0786208N^	with Three Notch Hold Open Clip	, Hook and Reducer	
	Bushing		3.6 (1.6)
		٨	NOT LISTED

Rebuilt Heavy Duty Diesel Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WE	EIGHT LBS (KG)
078610N^	with Three Notch Hold Oper	n Clip and Hook	3.6 (1.6)
			^ NOT LISTED

CONSTRUCTION

Body	Die cast aluminum body with black hand guard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT







Automatic shut-off nozzle with polymer handguard for farm, 12V skid tanks, large pumps with or without air eliminators and commercial applications.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
005231	1" F x 1" F NPT Low Pull Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Pump Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
000352	1" M x ¾" F NPT Multi-Plane Swivel
000356	1" M x ¾" F NPT Multi-Plane Swivel Anodized Black

Swivel•Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®

Spouts


MODEL NO.	DESCRIPTION
001473	Unleaded Spout without Flo-Stop®
010434	Unleaded Long Spout without Flo-Stop®
001471	Light Duty Diesel Spout without Flo-Stop® with StreamShaper®
010353	Light Duty Diesel Long Spout without Flo-Stop®
005215	Heavy Duty Diesel Spout with Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION	
000385	1" M x ¾" F Reducer Bushing - NPT threads	
000548	Hanging Hook for Unleaded and Light Duty Diesel Nozzles	
003593	Hold Open Clip Kit	
007089	Nozzle Service Kit	
000397	Unleaded Spout Gauge	

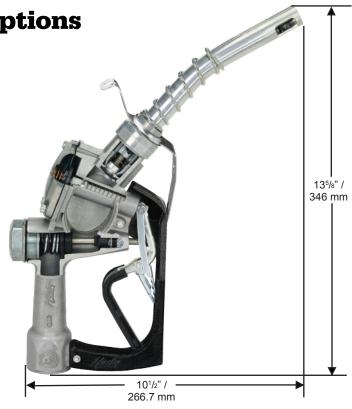

Guards

MODEL NO.	DESCRIPTION
000554	Full Grip Guard
001804	Full Grip Reguard
005494	Lever Guard
000226	Mate Guard
007376	Mate Handle Guard
008180	POPD® EZH Nozzle Guard
008179	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008170	POPD® H Mate Guard
008183	POPD® H Full Grip Guard
008190	POPD® H Full Grip Reguard
006628	POPD [®] S Clear Cover
006655	POPD® S Full Grip Guard
007210	POPD® S Full Grip Reguard
008169	POPD® S Mate Guard



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com