

# XFS Rebuilt Nozzles



Automatic shut-off nozzle for farm, 12V skid tanks and consumer pump applications.

- Strong, improved flow - up to 18 gpm / 68.1 Lpm.
- Dispenses 10 gpm / 37.8 Lpm at only 5.6 psi / 0.38 bar (unleaded nozzle).
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or is raised above horizontal.
- Unleaded nozzle includes StreamShaper® to reduce turbulence for straighter fuel flow and less splash back spillage.
- Has built-in hook and fits "holster lock" of skid tank pumps.
- Not for use with gravity tanks.
- Not legal for retail dispensing applications.



## Rebuilt Unleaded Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
504304N^	with Hold Open Clip and Hook	3.1 (1.4)
503604N^	with Hold Open Clip without Hook	3.1 (1.4)

^ NOT LISTED


## Rebuilt Light Duty Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
504303N^	with Hold Open Clip and Hook	3.2 (1.4)

^ NOT LISTED

## Construction

Body	Aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	¾" / 19 mm NPT

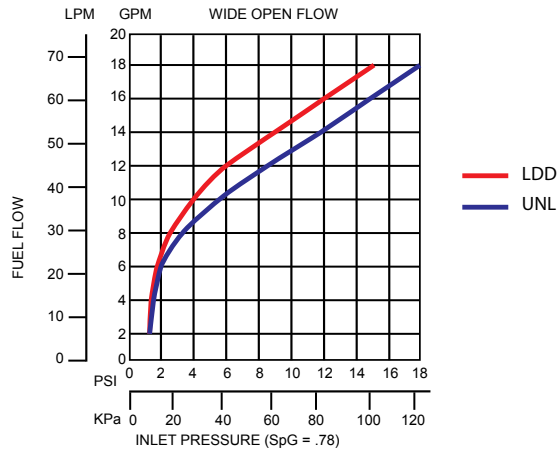

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Husky**

GENERAL FUELING PRODUCTS

# XFS Rebuilt Nozzles

Automatic shut-off nozzle for farm, 12V skid tanks and consumer pump applications.

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
003360	¾" F x ¾" F NPT Reconnectable Safe-T-Break®
002273	¾" F x ¾" F NPT Non-Reconnectable Safe-T-Break®
006130	¾" F x ¾" F NPT Non-Reconnectable PCC Safe-T-Break®
005230	¾" F x ¾" F NPT Low Pull Reconnectable Safe-T-Break®
003385	¾" F x ¾" F BSPP Reconnectable Safe-T-Break®
003385A	¾" F x ¾" F BSPP Reconnectable Safe-T-Break® - Atex
002774	¾" F x ¾" F BSPP Non-Reconnectable Safe-T-Break®
002774A	¾" F x ¾" F BSPP Non-Reconnectable Safe-T-Break® - Atex

### Swivels

MODEL NO.	DESCRIPTION
000350	¾" M x ¾" F NPT Multi-Plane Swivel
000355	¾" M x ¾" F NPT Multi-Plane Swivel Anodized Black
003895	¾" M x ¾" F NPT Inline Swivel
002272	¾" M x ¾" F NPT 90° Pump Swivel
002950	¾" M x ¾" F NPT Multi-Plane Restricted Swivel
003590	¾" M x ¾" F BSPP Multi-Plane Swivel
003590A	¾" M x ¾" F BSPP Multi-Plane Swivel - Atex
002771	¾" M x ¾" F BSPP 90° Pump Swivel
002771A	¾" M x ¾" F BSPP 90° Pump Swivel - Atex

### Swivel•Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	¾" M NPT Multi-Plane Swivel connected to ¾" F NPT Reconnectable Safe-T-Break®
007085	¾" M BSPP Multi-Plane Swivel connected to ¾" F BSPP Reconnectable Safe-T-Break®
007085A	¾" M BSPP Multi-Plane Swivel connected to ¾" F BSPP Reconnectable Safe-T-Break® - Atex

### Spouts

MODEL NO.	DESCRIPTION
003356	Unleaded Spout with Hanging Hook without Flo-Stop®
001473	Unleaded Spout without Flo-Stop®
010434	Unleaded Long Spout without Flo-Stop®
003358	Light Duty Diesel with Hanging Hook without Flo-Stop®
001471	Light Duty Diesel Spout without Flo-Stop® with StreamShaper®
010353	Light Duty Diesel Long Spout without Flo-Stop®

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit
000397	Unleaded Spout Gauge



### Guards

MODEL NO.	DESCRIPTION
003376	Black Handle Cover
004145	Full Grip Guard
001806	Full Grip Reguard
005494	Lever Guard
003440	Mate Easy-on Package
003795	Mate Guard
008176	POPD® EZH Nozzle Guard
008175	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008166	POPD® H Mate Guard
008185	POPD® H Full Grip Guard
008192	POPD® H Full Grip Reguard
006628	POPD® S Clear Cover
006665	POPD® S Full Grip Guard
007205	POPD® S Full Grip Reguard
008165	POPD® S Mate Guard
001506	Protection Package
001809	Reguard Protection Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.

