

1GSS Nozzles



Pressure activated, automatic shut-off nozzle with metal handguard for farm, 12V skid tanks, large pumps with or without air eliminators and commercial applications.

- 1GSS nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Nozzle is equipped with unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Not for use with gravity tanks.
- Not legal for retail dispensing applications.
- Stainless steel spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.

Unleaded Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1216804	with Three Notch Hold Open Clip and Hook	3.6 (1.6)

Light Duty Diesel Nozzles with NPT


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1216803	with Three Notch Hold Open Clip and Hook	3.6 (1.6)

Heavy Duty Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1216810	with Three Notch Hold Open Clip and Hook	3.6 (1.6)

Construction

Body	Die cast aluminum body with metal hand guard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT & BSPP

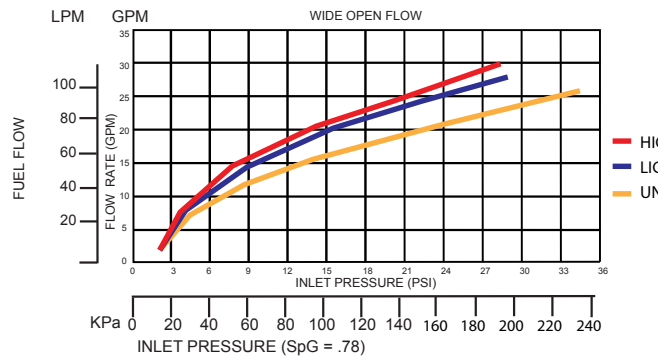

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Pressure activated, automatic shut-off nozzle with metal handguard for farm, 12V skid tanks, large pumps with or without air eliminators and commercial applications.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
005231	1" F x 1" F NPT Low Pull Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Pump Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
000352	1" M x 3/4" F NPT Multi-Plane Swivel
000356	1" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
003306	1" M x 1" F BSPP Multi-Plane Swivel
003306A	1" M x 1" F BSPP Multi-Plane Swivel - Atex

Swivel•Safe-T-Break® Combos


MODEL NO.	DESCRIPTION
005969	1" M NPTF Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex

Spouts

MODEL NO.	DESCRIPTION
001473	Unleaded Spout without Flo-Stop®
010434	Unleaded Long Spout without Flo-Stop®
001471	Light Duty Diesel Spout without Flo-Stop® with StreamShaper®
010353	Light Duty Diesel Long Spout without Flo-Stop®
005215	Heavy Duty Diesel Spout with Flo-Stop®

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007089	Nozzle Service Kit
003593	Hold Open Clip Kit
000385	1" M x 3/4" F Reducer Bushing - NPT Threads
001717	1" M x 3/4" F Reducer Bushing - BSPP Threads
000397	Unleaded Spout Gauge
000548	Hanging Hook for Unleaded and Light Duty Diesel Nozzles

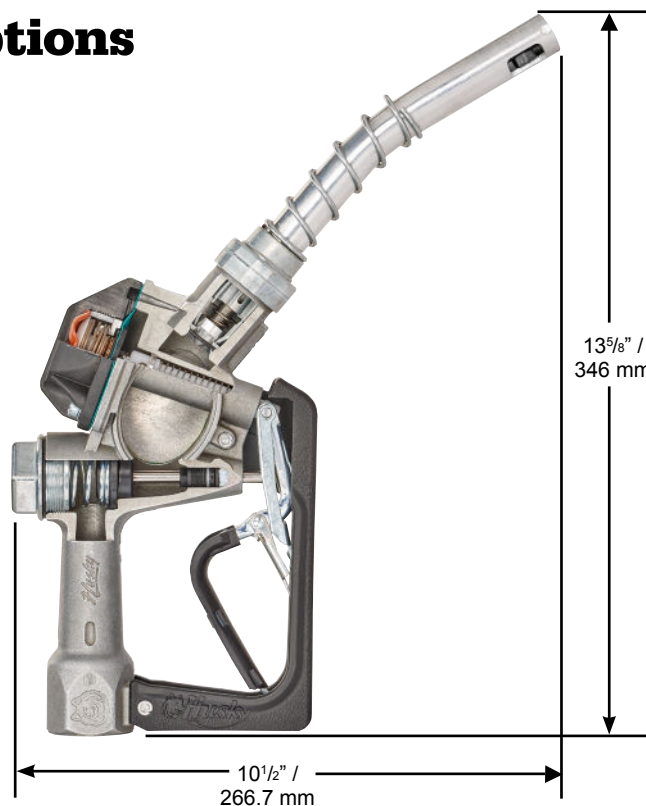

Guards

MODEL NO.	DESCRIPTION
012164	Full Grip Guard
005494	Lever Guard
007295	Mate Handle Guard
006628	POPD® Clear Cover
007999	POPD® H Clear Cover
001807	Waffle Splash Guard with Smaller Hole
001808	Waffle Splash Guard

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT