

Tank Controller for use with oil, waste oil, diesel fuel, antifreeze, water and other fluids with a high flash point.

- Self-regulating fluid transfer system.
- Provides automatic re-filling of monitored tank.
- Prevents costly tank overfills.
- Built in overfill monitoring-103 decibel alarm siren and flashing LED.
- Push to fill button provides instant topping off of monitored tank.
- Engineered for most single or double wall tanks with 2" NPT bung opening.
- Designed for tank depths between 24"-78" (610 mm-1981 mm).

- Requires one air powered diaphragm pump not included.
- System shuts off air to diaphragm pump and oil flow to day tank when high level sensor is tripped.
- System includes: Tank mounted controller, air solenoid valve, fluid control valve, 115 volt ac adaptor, 25 ft of cabling.
- Tank depth and riser height information required at time of order.
- New swivel allows easy orientation of gauge after installation.

Monitors and Alarms

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
010613	Kaltey Commander Tank Controll	er 14 (6.4)










WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov





Tank Controller for use with oil, waste oil, diesel fuel, antifreeze, water and other fluids with a high flash point.

Dimensions

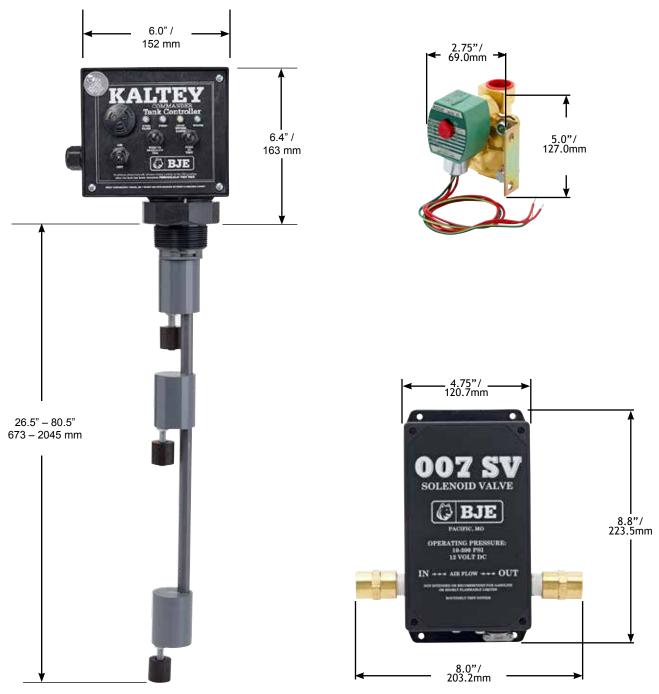



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com