

1HSS Nozzles



4-23

HIGH VOLUME FUELING

Pressure activated, automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

- 1HSS nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Comes standard with smooth full grip guard.
- Optional EZ Lever and tilt poppet:
 - two piece lever design cuts opening force in half.
 - maximizes “to-the-penny” dispensing.
 - ADA compliant.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.




New Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1217110	with Three Notch Hold Open Clip	3.4 (1.5)
1217165	with Three Notch Hold Open Clip and Waffle Splash Guard	3.4 (1.5)
1437710N [^]	with Two Notch Hold Open Clip, EZ Lever and Tilt Poppet	3.4 (1.5)

[^] NOT LISTED

Construction

Body	Die cast aluminum body with high impact polymer hand guard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT and BSPP

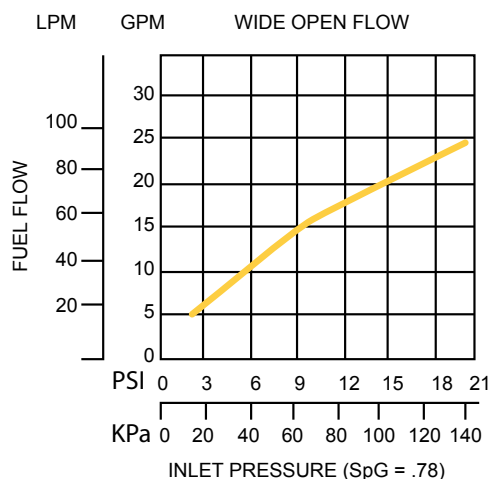

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



1HSS Nozzles

Pressure activated, automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
005231	1" F x 1" F NPT Low Pull Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
004860	1" M x 1" F NPT Multi-Plane High Flow Swivel
000095	1" M x 1" F NPT 70° Pump Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
003306	1" M x 1" F BSPP Multi-Plane Swivel
006949	1" M x 1" F BSPP Multi-Plane High Flow Swivel

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPTF Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex

Spouts


MODEL NO.	DESCRIPTION
005215	Heavy Duty Diesel Spout with Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

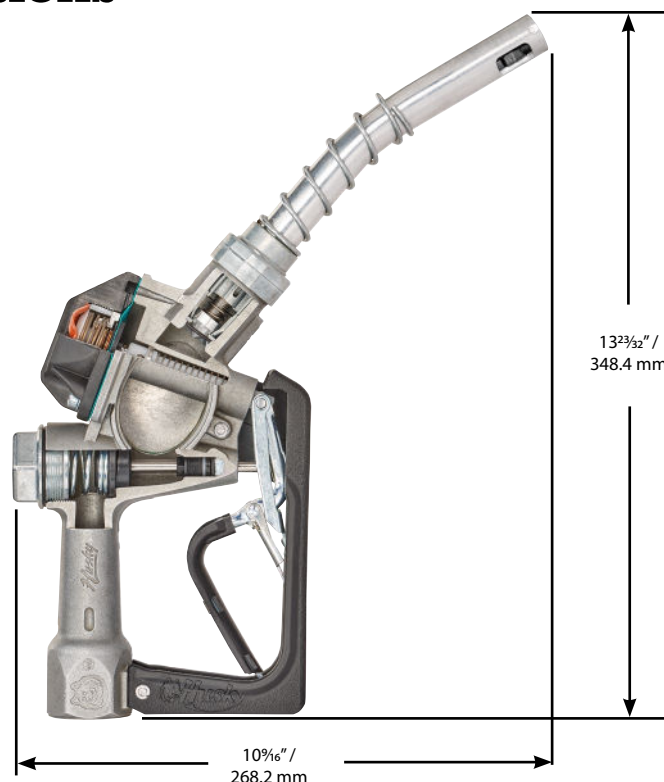

Guards

MODEL NO.	DESCRIPTION
012164	Full Grip Guard
005494	Lever Guard
007295	Mate Handle Guard
006628	POPD® Clear Cover
007999	POPD® H Clear Cover
001807	Waffle Splash Guard with Smaller Hole
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

