

1HS Nozzles



4-4

HIGH VOLUME FUELING

Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

- 1HS nozzle shuts off when the gas tank is full.
- Accu-Flo® poppet allows “to-the-penny” fuel dispensing.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Comes standard with full grip guard and waffle splash guard.



New Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
026810N [^]	with Three Notch Hold Open Clip	3.4 (1.5)
026865N [^]	with Three Notch Hold Open Clip and Waffle Splash Guard	3.4 (1.5)
026890N [^]	with Three Notch Hold Open Clip, POPD® Full Grip Guard and Waffle Splash Guard	3.4 (1.5)
026812	without Hold Open Clip	3.4 (1.5)

[^] NOT LISTED

Rebuilt Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
052410N [^]	with Three Notch Hold Open Clip	3.4 (1.5)
052412	without Hold Open Clip	3.4 (1.5)

[^] NOT LISTED

New Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
026838N [^]	with Three Notch Hold Open Clip	3.4 (1.5)
026838A	with Three Notch Hold Open Clip	3.4 (1.5)
026840	without Hold Open Clip	3.4 (1.5)

[^] NOT LISTED


Rebuilt Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
052438N [^]	with Three Notch Hold Open Clip	3.4 (1.5)

[^] NOT LISTED

Construction

Body	Die cast aluminum body with high impact polymer hand guard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1" / 25.4 mm NPT and BSPP

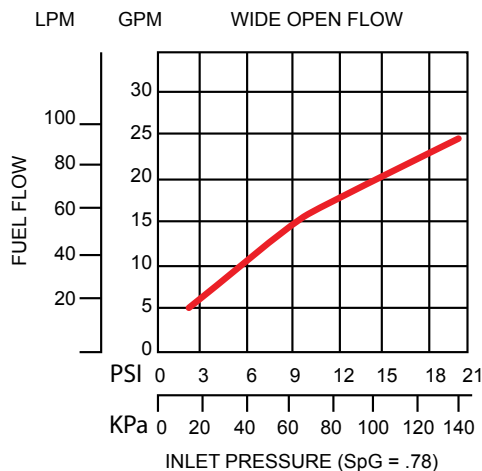

II 1 G
EN 13012
TYPE 2



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
005231	1" F x 1" F NPT Low Pull Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
004860	1" M x 1" F NPT Multi-Plane High Flow Swivel
000095	1" M x 1" F NPT 70° Pump Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
003306	1" M x 1" F BSPP Multi-Plane Swivel
006949	1" M x 1" F BSPP Multi-Plane High Flow Swivel

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPTF Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex

Spouts


MODEL NO.	DESCRIPTION
005215	Heavy Duty Diesel Spout with Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

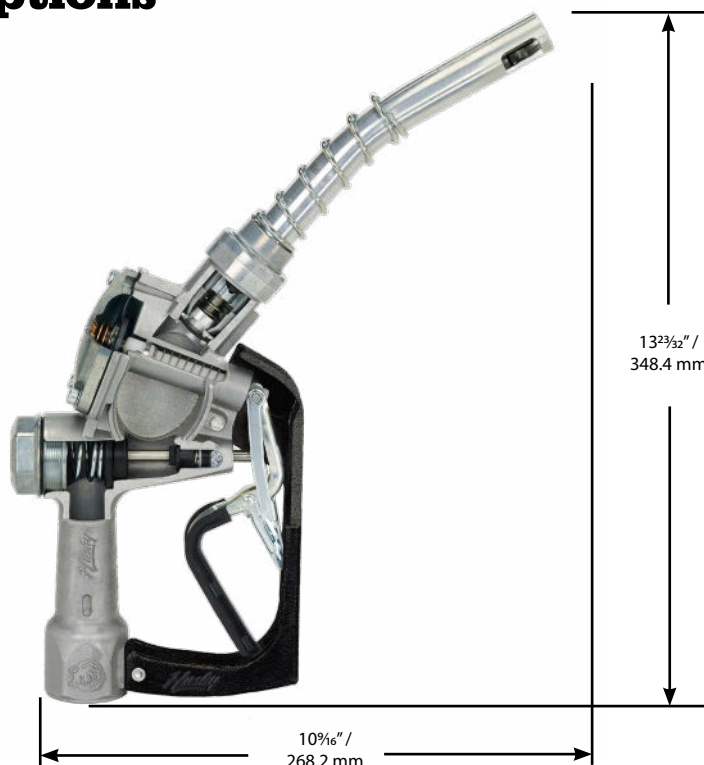

Guards

MODEL NO.	DESCRIPTION
000554	Full Grip Nozzle Guard
001804	Full Grip Nozzle Reguard
005494	Lever Guard
007376	Mate Handle Cover
000226	Mate Nozzle Guard
008180	POPD® EZH Nozzle Guard
008179	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008183	POPD® H Full Grip Guard
008190	POPD® H Full Grip Reguard
008170	POPD® H Mate Guard
006628	POPD® S Clear Cover
006655	POPD® S Full Grip Guard
007210	POPD® S Full Grip Reguard
008169	POPD® S Mate Guard
000099	Protection Package
001811	Reguard Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

