

# XS® E25 CW PHG Nozzle



6-8

ETHANOL FUELING

**Pressure activated, automatic shut-off nozzle for full-service, self-service and unattended stations.**

- XS® E25 nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- *StreamShaper®* reduces turbulence for straighter fuel flow and less splash back spillage.
- Compatible with unleaded and all Ethanol blends through E-25.
- A reinforced stainless steel spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Nozzle comes with smooth full grip guard.
- All seals are UL approved fluorocarbon compounds to prevent deterioration from Ethanol blends.
- New poppet seal design in conjunction with new tilt poppet design improves flow control (“to-the-penny” dispensing) and provides enhanced endurance over time.
- Contains a poppet seal rated at -40° F/C to prevent fuel leakage from the main seal in extreme cold weather.




## New Unleaded Nozzle

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1108459	with Three Notch Hold Open Clip and Waffle Splash Guard	3.0 (1.3)
		^ NOT LISTED

## Construction

Body	One piece die cast aluminum
Seals	Fluorocarbon
Handguard	Polymer
Packing	Double O-ring seal protected by fiber reinforced Teflon®
Lever	Polymer
Inlet	¾" / 19 mm NPT

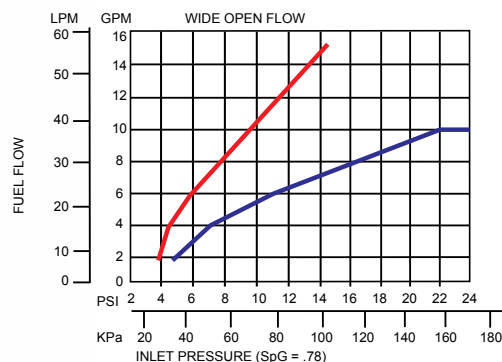

WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



# XS® E25 CW PHG Nozzle

**Pressure activated, automatic shut-off nozzle for full-service, self-service and unattended stations.**

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
006360^	¾" F x ¾" F Reconnectable E25 Safe-T-Break®
006273	¾" F x ¾" F Non-Reconnectable E25/E85 Safe-T-Break®

^ NOT LISTED

### Spouts

MODEL NO.	DESCRIPTION
011100	Unleaded E25 Spout Assembly

### Pressure/Vacuum Vents


MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit
004951	Spout Nut
000397	Unleaded Spout Gauge

### Guards

MODEL NO.	DESCRIPTION
003376	Black Handle Guard
004145	Full Grip Guard
001806	Full Grip Reguard
005494	Lever Guard
003440	Mate Easy-on Package
003795	Mate Guard
006628	POPD® Clear Cover
006665	POPD® Full Grip Guard
007205	POPD® Full Grip Reguard
007815	POPD® Mate Guard
001506	Protection Package
001809	Reguard Protection Package
001808	Waffle Splash Guard

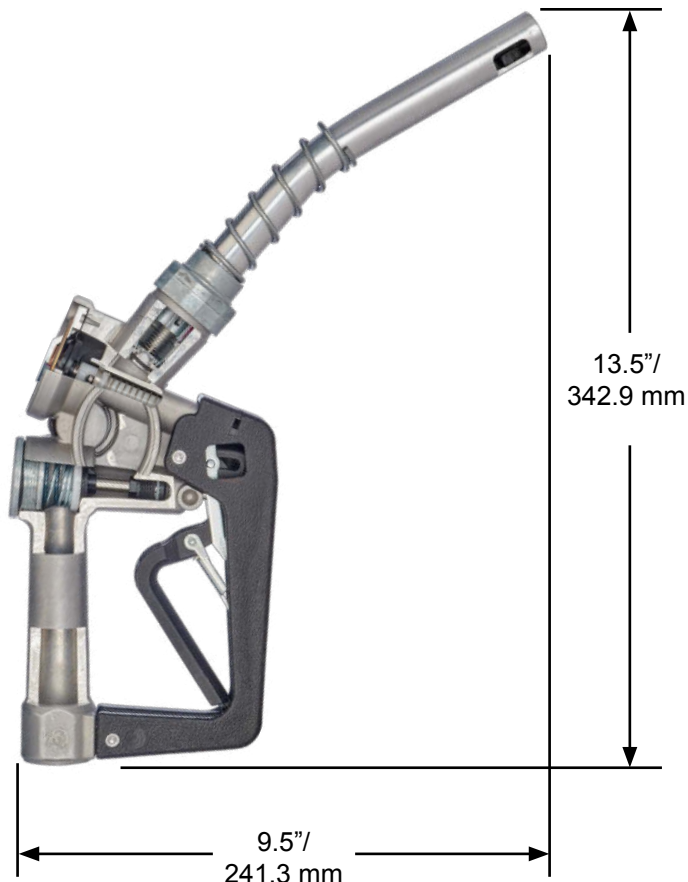

2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.

