

# Enhanced Conventional 6025 (ECO) Nozzles



**Automatic shut-off conventional nozzle equipped with a mechanical interlock that shuts off the nozzle if it moves away from the filler pipe.**

- Unique internal interlock device that shuts off the fuel flow before the spout is out of the tank.
- Aluminum casting with high impact polymer hand guard provides a lightweight, easier to handle conventional nozzle.
- 2-piece lever is easier to use:
  - requires ½ the force to open nozzle.
  - ADA compliant.
- A reinforced stainless steel spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Drip Less spout reduces/eliminates drips from spout.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Lightest insertion “force” of any safety interlock operated nozzle.
- Comes standard with smooth full grip guard.
- CARB certified per CP-207 for drips, spills, spitting and liquid retention.
- Unique tilt poppet maximizes “to-the-penny” dispensing.
- Cold weather version contains a poppet disc seal rated to -40° F/C to prevent fuel leakage from the main seal in extreme cold



## New Unleaded Nozzles


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1190404*	with Two Notch Hold Open Clip, EZ Lever and Drip Less Spout	2.8 (1.3)
1190408*	without Hold Open Clip, with EZ Lever and Drip Less Spout	2.8 (1.3)
11904180*	with Two Notch Hold Open Clip, EZ Lever, Drip Less Spout and Flo-Equalizer®	2.8 (1.3)
E1190404*	with Two Notch Hold Open Clip, EZ Lever, Drip Less Spout and Mate Guard	2.8 (1.3)
^1190416*	with Two Notch Hold Open Clip, EZ Lever and Drip Less Spout	2.8 (1.3)

## New Cold Weather Unleaded Nozzle

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1474504	with Two Notch Hold Open Clip, EZ Lever and Drip Less Spout	2.8 (1.3)

## Construction

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon®
Lever	Two piece high impact polymer
Inlet	¾" / 19.1 mm NPT or ^BSPP

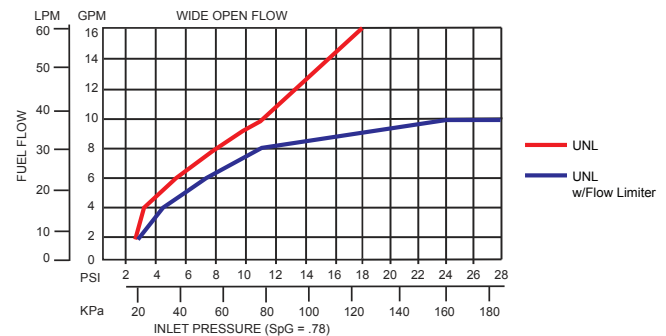

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



# Enhanced Conventional 6025 (ECO) Nozzles

Automatic shut-off conventional nozzle equipped with a mechanical interlock that shuts off the nozzle if it falls from the fill tank.

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002273	¾" F x ¾" F NPT Non-Reconnectable Safe-T-Break®
003360	¾" F x ¾" F NPT Reconnectable Safe-T-Break®
005230	¾" F x ¾" F NPT Low Pull Reconnectable
006130	¾" F x ¾" F NPT Non-Reconnectable PCC Safe-T-Break®
008330	¾" F x ¾" F NPT Reconnectable MagBreak®

### Swivels

MODEL NO.	DESCRIPTION
000350	¾" M x ¾" F NPT Multi-Plane Swivel
000355	¾" M x ¾" F NPT Multi-Plane Swivel Anodized Black
002272	¾" M x ¾" F NPT 90° Pump Swivel
002950	¾" M x ¾" F NPT Multi-Plane Restricted Swivel

### Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	¾" M NPT Multi-Plane Swivel connected to ¾" F NPT Reconnectable Safe-T-Break®

### Spouts


MODEL NO.	DESCRIPTION
013664	Unleaded ECO Spout Assembly Kit

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT
005041	3" Thread to 2" Adaptor - NPT

### Guards

MODEL NO.	DESCRIPTION
014034	Full Grip Nozzle Guard
015990	ECO Nozzle Mate Guard
015431	ECO Handle Cover

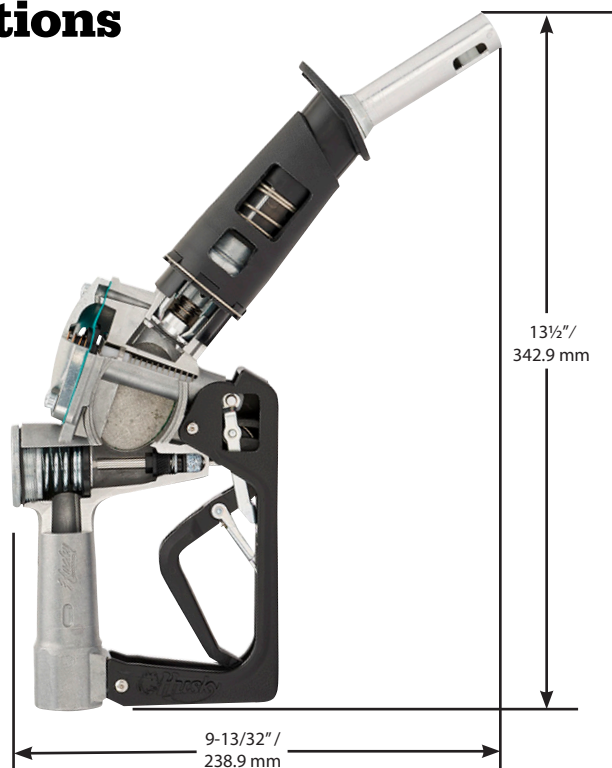

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
004490	Conventional Flo-Equalizer® - 10 gpm / 37.9 Lpm
003593	Hold Open Clip Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm
000397	Unleaded Spout Gauge

### Low Perm Hoses

MODEL NO.	DESCRIPTION
CP12LP8.5	¾" Low Perm Hardwall 8.5' Assembly Hose
CP12LP8.5SV	¾" Low Perm Hardwall 8.5' Assembly Hose Swivel
CP12LP9	¾" Low Perm Hardwall 9' Assembly Hose
CP12LP9SV	¾" Low Perm Hardwall 9' Assembly Hose Swivel
CP12LP.75	¾" Low Perm Hardwall 9" Assembly Hose
CP12LP.75SV	¾" Low Perm Hardwall 9" Swivel Assembly Hose



2325 Husky Way • Pacific, MO 63069  
(800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.