


Pressure activated, automatic shut-off nozzle with polymer handguard for truck stop and other high volume full-service, self-service and unattended stations.


- VIIS nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
 - Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
 - Spout is reinforced with thick aluminum bushing that retains spout spring and keeps spout from rounding-in: the two leading causes of clicking off and splash-back spillage.
- 

Rebuilt Heavy Duty Diesel Nozzles with NPT

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|-----------|--|--------------------------|
| 266010 | with Three Notch Hold Open Clip, Waffle Splash Guard and Spout Bushing | 4.6 (2.0) |
| 503510 | with Three Notch Hold Open Clip and Waffle Splash Guard without Spout Bushing | 4.6 (2.0) |

Construction

| | |
|---------|--|
| Body | Aluminum |
| Seals | Fluorocarbon |
| Packing | Double o-ring seal protected by fiber reinforced Teflon® |
| Lever | One piece contoured steel |
| Inlet | 1" / 25.4 mm NPT |

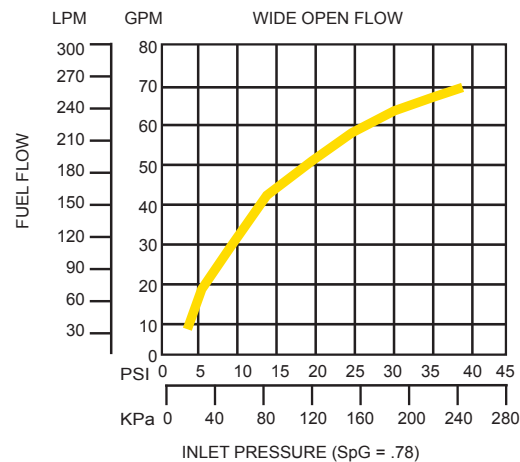

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



VIIIIS Rebuilt Nozzles

Pressure activated, automatic shut-off nozzle with polymer handguard for truck stop and other high volume full-service, self-service and unattended stations.

Dimensions and System Options

Safe-T-Breaks®

| MODEL NO. | DESCRIPTION |
|-----------|--|
| 002276 | 1" F x 1" F Reconnectable Safe-T-Break® |
| 005812 | 1" F x 1" F Non-Reconnectable Safe-T-Break® |
| 006301 | 1" F x 1" F Non-Reconnectable PCC Safe-T-Break® |
| 005231 | 1" F x 1" F Low Pull Reconnectable Safe-T-Break® |

Swivels

| MODEL NO. | DESCRIPTION |
|-----------|--|
| 000087 | 1" M x 1" F Multi-Plane Swivel |
| 004860 | 1" M x 1" F Multi-Plane High Volume Swivel |
| 000095 | 1" M x 1" F Multi-Plane 70° Pump Swivel |
| 003395 | 1" M x 1" F Multi-Plane Restricted Swivel |

Swivel/Safe-T-Break® Combos

| MODEL NO. | DESCRIPTION |
|-----------|---|
| 005969 | 1" M Multi-Plane Swivel connected to 1" F Reconnectable Safe-T-Break® |

Spouts


| MODEL NO. | DESCRIPTION |
|-----------|--|
| 002279 | Complete Spout Assembly with Spout Bushing |
| 005017 | Complete Spout Assembly without Spout Bushing |
| 003589 | Complete Long Spout Assembly with Spout Bushing |
| 011043 | Complete Spout Assembly without Spout Bushing and Small Spout Spring |

Pressure/Vacuum Vents

| MODEL NO. | DESCRIPTION |
|-----------|--|
| 004620 | 2" Slip-On Pressure Vacuum Vent |
| 004885 | 2" Thread-On Pressure Vacuum Vent - NPT |
| 005885 | 2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT |

Accessories, Testing and Maintenance

| MODEL NO. | DESCRIPTION |
|-----------|------------------------|
| 003593 | Hold Open Clip Kit |
| 007089 | Nozzle Service Kit |
| 006645 | Plunger Assy Lift Tool |

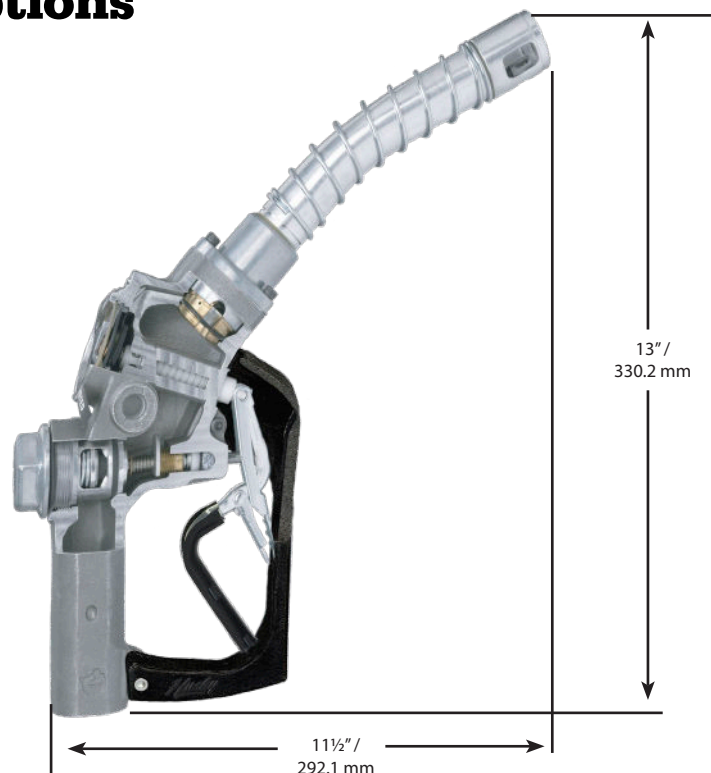

Guards

| MODEL NO. | DESCRIPTION |
|-----------|---------------------------|
| 004740 | Full Grip Guard |
| 005516 | Full Grip Reguard |
| 005494 | Lever Guard |
| 008178 | POPD® EZH Nozzle Guard |
| 008177 | POPD® EZS Nozzle Guard |
| 007999 | POPD® H Clear Cover |
| 008186 | POPD® H Full Grip Guard |
| 008193 | POPD® H Full Grip Reguard |
| 008168 | POPD® H Mate Guard |
| 006628 | POPD® S Clear Cover |
| 007352 | POPD® S Full Grip Guard |
| 008194 | POPD® S Full Grip Reguard |
| 008167 | POPD® S Mate Guard |
| 001808 | Waffle Splash Guard |



2325 Husky Way • Pacific, MO 63069
(800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

