


# V34 Nozzles



**Pressure activated, automatic shut-off vacuum assist nozzle for full-service, self-service and unattended stations.**

- V34 Nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- *Streamshaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Husky® vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Nozzle spout is covered by a one year warranty.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Uses conventional spout with spout ring and soft vapor escape guard.
- Vapor assist achieved at the body end of the spout where a vapor ring catches emissions.
- Optional EZ Lever:
  - two piece design cuts opening force in half
  - easier "to-the-penny" dispensing
  - ADA compliant

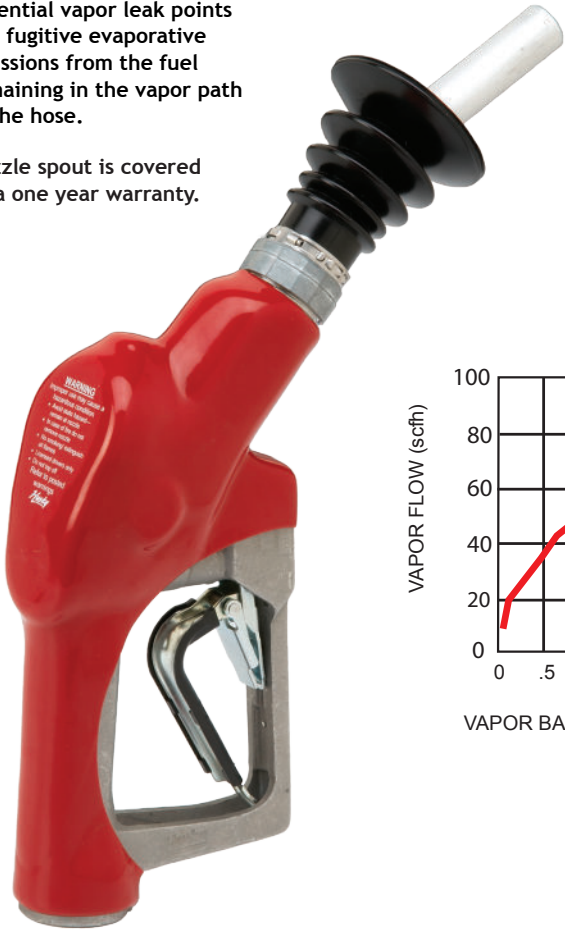

## New Unleaded Nozzles



MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
6250041	with Three Notch Hold Open Clip	4.0 (1.8)
6250041A*	with Three Notch Hold Open Clip - Atex	4.0 (1.8)
6250241	with Three Notch Hold Open Clip and Sightglass	4.0 (1.8)
6250941	with Three Notch Hold Open Clip and POPD® Full Grip Guard	4.0 (1.8)
6250431	with Single Notch Hold Open Clip	4.0 (1.8)
6250891	with Single Notch Hold Open Clip and POPD® Full Grip Guard	4.0 (1.8)
6250081	without Hold Open Clip	4.0 (1.8)
11996041	with Two Notch Hold Open Clip and EZ Lever	4.0 (1.8)

## Rebuilt Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
6254041	with Three Notch Hold Open Clip	3.7 (1.6)
6254241	with Three Notch Hold Open Clip and Sightglass	3.7 (1.6)
6254081	without Hold Open Clip	3.7 (1.6)

## Construction

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	M34 x 1.5

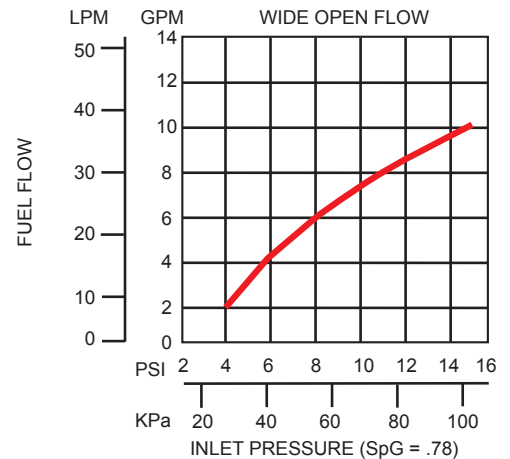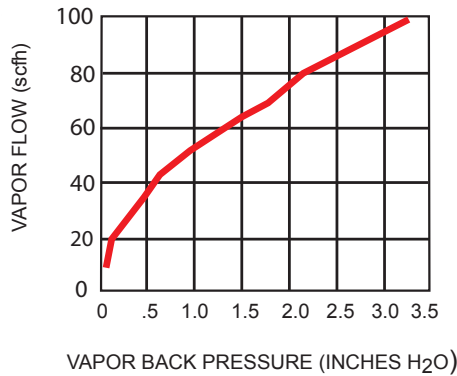

AIR RESOURCES BOARD



II 1 G  
EN 13012  
Type 1



P-TÜ7-8113626964

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Pressure activated, automatic shut-off vacuum assist nozzle for full-service, self-service and unattended stations.**

## Dimensions and System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
004034	Reconnectable Safe-T-Break®
004034A	Reconnectable Safe-T-Break® - Atex
006210	Non-Reconnectable Safe-T-Break®
005134A	Non-Reconnectable Safe-T-Break® - Atex
010513	Non-Reconnectable Safe-T-Break® - Shearpin

### Swivels

MODEL NO.	DESCRIPTION
004605	Inverted Vapor Assist Swivel
004605A	Inverted Vapor Assist Swivel - Atex

### Spouts


MODEL NO.	DESCRIPTION
006291	Complete Spout Assembly Kit - Unleaded
006391	Unleaded Spout

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
006941	Adaptor, Conventional Fueling to 3/4"
004360	Air/Liquid Spout Adaptor
003593	Hold Open Clip Kit
004335	O-ring, Air/Liquid Test Spout Adaptor
005233	O-ring Kit
007089	Nozzle Service Kit
005260	Tool for dry Air/Liquid Test
000397	Unleaded Spout Gauge
005837	Vapor Assist Flo-Equalizer®
004000	Vapor Splash Guard (VSG) with Clamp
004039	Vapor Splash Guard Clamp
006497	VSG Clamp Tool
010073	Waffle VSG with Clamp (single notch V34)
010076	Waffle VSG without Clamp (single notch V34)

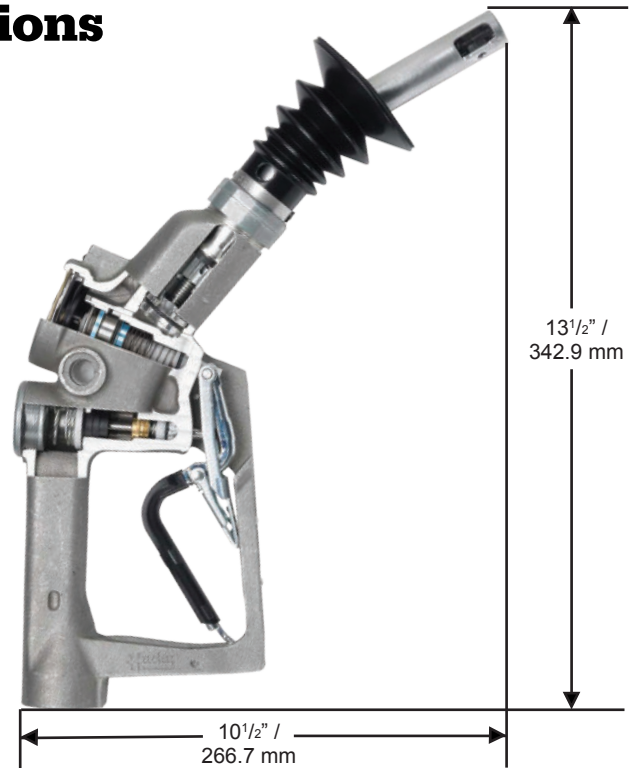

### Guards

MODEL NO.	DESCRIPTION
006951	Full Grip Guard
004231	Full Grip Reguard
005494	Lever Guard
007999	POPD® H Clear Cover
008184	POPD® H Full Grip Guard
008191	POPD® H Full Grip Reguard
006628	POPD® S Clear Cover
006660	POPD® S Full Grip Guard
007220	POPD® S Full Grip Reguard