



**All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.**

- High impact resistant polymer housing.
- Compatible with unleaded, diesel, and all Ethanol blends through E85
- Features same separation mechanism as Model 008330
- Lighter than competing magnetic breakaways.
- Two straight screwdrivers used to separate.
- For easier install and maintenance on other hanging hardware
- Assurance of proper reconnection using a simple “twist to lock” feature.
- Absorb line shock in excess of 450 psi at 17 gpm (31 bar at 64.3 Lpm)
- Low scuff housing.
- Line shock absorbing design.
- Stops flow on both sides of break.

### G2 E25/E85 MAGBREAK®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
014647	G2 MAGBREAK® 3/4" F x 3/4" F E25/85 NPT (Separates at less than 200 pounds pull force)	1.21 (.55)

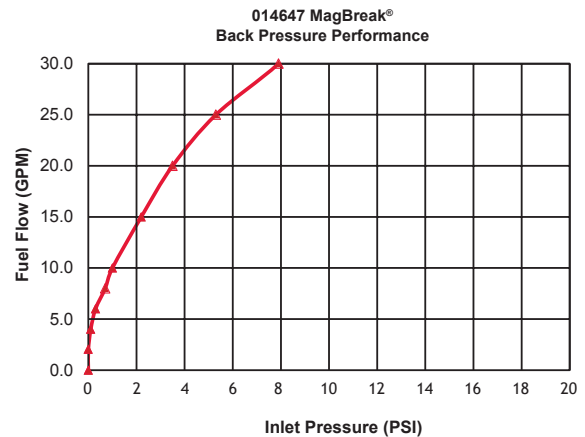

 WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



# E25/E85 MAGBREAK®

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

## Dimensions

SAFE-T-BREAKS®

**G2 E25/E85  
Magbreak®**



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.