

**All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.**

### Model 3360VR

- Reconnectable Safe-T-Break® for balance vapor recovery systems - coaxial hoses with fuel on the “inside”, vapor return on the “outside”.
- Tool free reconnection design.
- Unique in-line latching mechanism requires less force to reconnect Safe-T-Break® after a separation.
- Improved vapor valve stops vapors from escaping after a drive away.
- Separates at less than 350 lbf / 1557 N to minimize backlash damage.
- Patented wave spring design minimizes nuisance breaks.
- Features anti-rotation roll pins to withstand hose retractor usage without leaking.
- Scuff guard protection during drive offs.

### Model 005900

- Non-reconnectable Safe-T-Break® for balance vapor recovery systems - coaxial hoses with fuel on the “inside”, vapor return on the “outside”.
- Improved vapor valve stops vapors from escaping after a drive away.
- Separates at less than 350 lbf / 1557 N to minimize backlash damage.
- Same built-in vapor valve as Model 3360VR.
- Features anti-rotation roll pins to withstand hose retractor usage without leaking.

### Reconnectable

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
3360VR**	Reconnectable Safe-T-Break®	1.3 (.5)

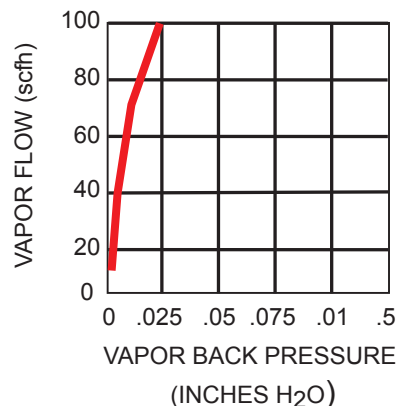
### Non-reconnectable

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
005900**	Non-Reconnectable Safe-T-Break®	1.3 (.5)

\*\*See page 2 for guard color options

### Construction

Body	Aluminum
Seals	Fluorocarbon
Springs	Stainless Steel
Threads	17/8" x 12
Stainless steel load and latch spring reverse mechanism	
Hardened stainless steel latch ring and balls	



Model 3360VR



Model 005900



Texas Commission on Environmental Quality



CALIFORNIA AIR RESOURCES BOARD



Missouri Department of Natural Resources

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Husky**

GENERAL FUELING PRODUCTS

# Balance Vapor **STB**

All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

## Dimensions and System Options

### Guards

MODEL NO.	DESCRIPTION
003990**	Scuff Guard for 3360VR Safe-T-Break® - Reconnectable
016987**	Scuff Guard for 005900 Safe-T-Break® - Non-Reconnectable

### Accessories, Maintenance, and Testing

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup

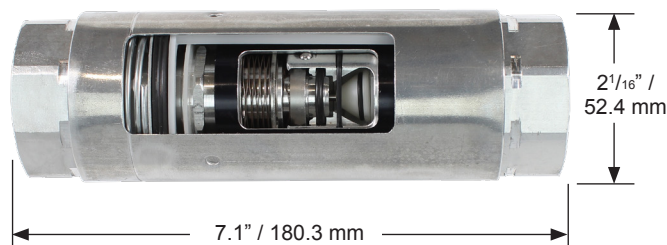
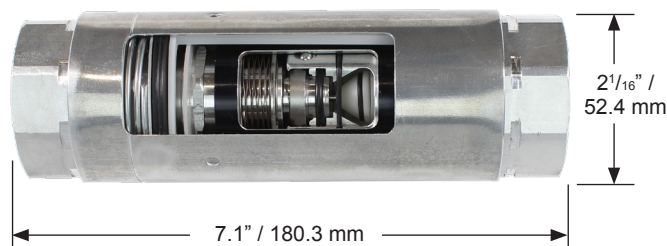
### Color Chart

COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	White	-06
Red	-02	Gold	-08
Green	-03	Silver	-09
Black	-04	BP Green	-16
Yellow	-05	Pink	-20

\*\*Safe-T-Breaks® and Safe-T-Break® Scuff Guards are to be ordered with the corresponding guard color option added to the model number.

Example: If BLUE guards are desired, add guard color option -01 to the model number (004034-01).

For custom colors, a minimum order of 4,000 guards will be required.

**Model 3360VR****Model 005900**

2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.

