

X DEF M34 Nozzles



X DEF
M34

DIESEL EXHAUST FLUID

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- X DEF M34 nozzle shuts off when tank is full.
- Lighter than stainless steel nozzles.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Less expensive than comparable nozzles.
- Tilt poppet design provides precise “to-the-penny” dispensing.
- Stainless steel spout for durability.
- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard 22241-2:2006.
- Aluminum body is anodized to prevent contamination from DEF blends.
- Optional Flo-Equalizer® prohibits the nozzle from exceeding 3 gpm (11.4 Lpm).
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.



MODEL NO.
11676274N

New X DEF Nozzle with M34

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
11676274N [^]	with Two Notch Hold Open Clip and Long Spout	3.0 (1.3)
12150185N [^]	with Two Notch Hold Open Clip, Spout Ring, Magnetic Accufuel® Spout and Gilbarco Magnetic Handguard	3.0 (1.3)
12150187N [^]	with Two Notch Hold Open Clip and Gilbarco Magnetic Handguard	3.0 (1.3)
12150259N [^]	without Two Notch Hold Open Clip, with Gilbarco Magnetic Handguard	3.0 (1.3)
12150291N [^]	with Two Notch Hold Open Clip, Low Volume Flow Regulator (3 gpm.) and Gilbarco Magnetic Handguard	3.0 (1.3)
12644155N [^]	with Two Notch Hold Open Clip and Wayne Magnetic Handguard	3.0 (1.3)
12970185N [^]	with Two Notch Hold Open Clip, Spout Ring, Magnetic Accufuel® Spout and Wayne Magnetic Handguard	3.0 (1.3)
12970259N [^]	without Two Notch Hold Open Clip, with Wayne Magnetic Handguard	3.0 (1.3)
1215300N [^]	without Two Notch Hold Open Clip, Low Volume Flow Regulator (3 gpm.) and Gilbarco Magnetic Handguard	3.0 (1.3)

[^] NOT LISTED





WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.


Dimensions

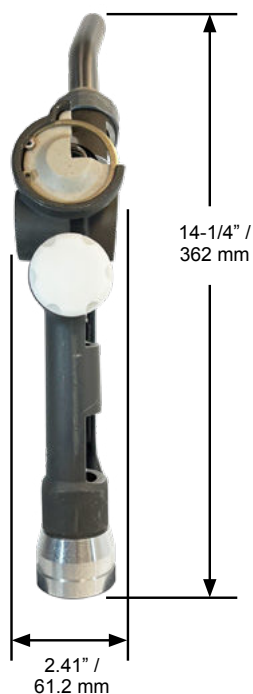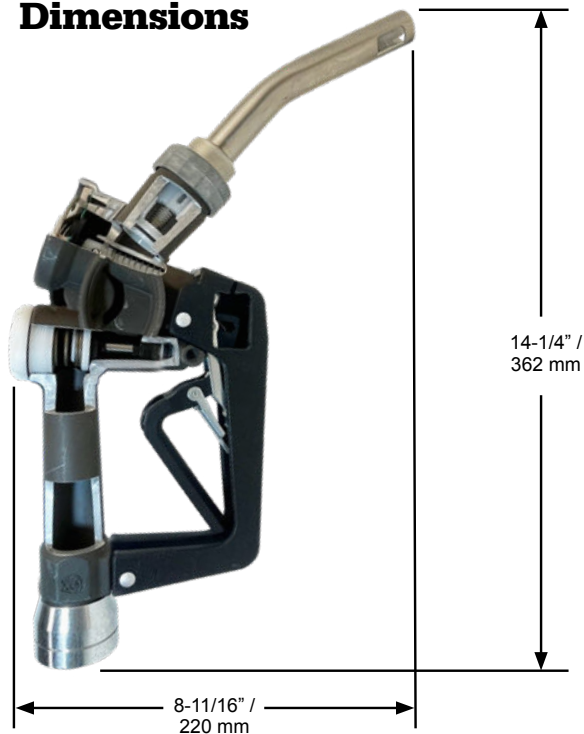

Construction

Body	Die cast, anodized aluminum with high-impact polymer handguard
Seals	Fluorocarbon
Spout	19 mm diameter
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	Two-piece polymer EZ Lever
Inlet	M34 x 1.5 mm

X DEF NOZZLE AVERAGE BACK PRESSURE PERFORMANCE VERIFICATION

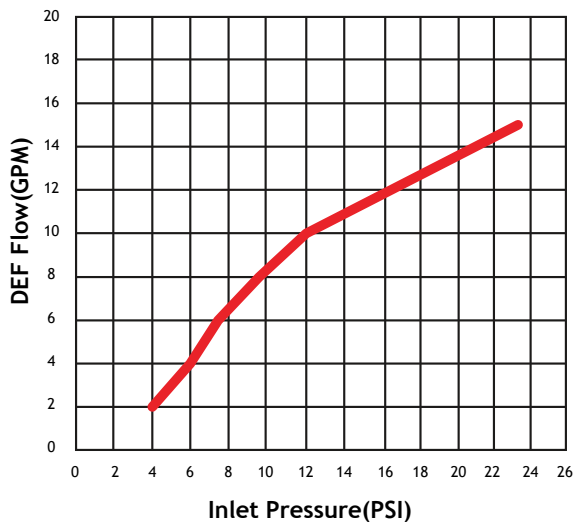



X DEF M34 Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

Mate Guard



Waffle Guard Options


1808 Waffle Guard



Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip

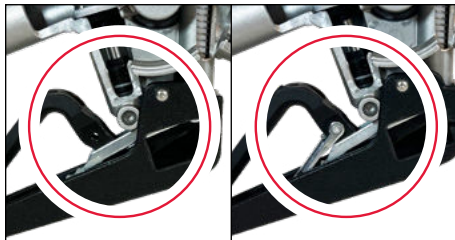

Handguard Options

Standard Polymer Handguard

Gilbarco Polymer Handguard (with or without Magnet)

Tokheim Polymer Handguard (with or without Magnet)


Wayne Polymer Handguard (with or without Magnet)



Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

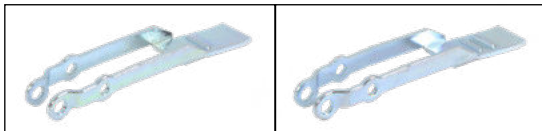

Flo-Equalizer® Option





X DEF M34 Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

System Options

Swivels

MODEL NO.	DESCRIPTION
007275	1" M BSPP x M34 M Inline Swivel

Guards

MODEL NO.	DESCRIPTION
001808	Waffle Splash Guard
003795	Mate Nozzle Guard
004145	Full Nozzle Guard
007361	Handle Cover (Black)
014114	International Mate Nozzle Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
013285	with StreamShaper®
013286	with Spout Ring and Magnetic Accufuel® Safety Feature

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
03185	M34 Single-Plane Swivel connected to 1" BSPP Service Reconnectable Safe-T-Break®

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-21	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.