

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

- XS[®] MFM nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop[®] device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- *StreamShaper*[®] reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.
- Tilt poppet design provides precise “to-the-penny” dispensing.
- Optional sightglass provides a clear window for the customer to view the fuel as it passes through the main poppet valve.
- Optional cold weather seals are rated to -40 °F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser’s proximity switch, or can be provided without the magnet for dispensers equipped with a standard “flapper” switch.
- Optional Flo-Equalizer[®] prohibits the nozzle from exceeding 10 gpm (37.9 Lpm).
- Optional Drip Less spout mitigates the amount of fuel released from the spout tip after refueling is completed.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.



MODEL NO.
159562

New Unleaded Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
159562	with Two Notch Hold Open Clip and 1808 Waffle Splash Guard	3.3 (1.5)
498162	with Two Notch Hold Open Clip, 1808 Waffle Splash Guard and Cold Weather Seals	3.3 (1.5)
^ NOT LISTED		

New Light Duty Diesel Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
159560	with Two Notch Hold Open Clip and 1808 Waffle Splash Guard	3.3 (1.5)
1595267	with Two Notch Hold Open Clip, 1808 Waffle Splash Guard and Drip Less Spout	3.3(1.5)
E159560	with Two Notch Hold Open Clip, Mate Guard, Polymer Handle Cover and 1808 Waffle Splash Guard	3.3(1.5)
^ NOT LISTED		

New Unleaded Nozzles with M34 Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E1595293N [^]	with Two Notch Hold Open Clip, Mate Guard, Polymer Handle Cover and 1808 Waffle Splash Guard	3.3(1.5)
E15230293N [^]	with Two Notch Hold Open Clip, Wayne Magnetic Handguard, Mate Guard, Polymer Handle Cover and 1808 Waffle Splash Guard	3.3(1.5)
E15230298N [^]	with Two Notch Hold Open Clip, Wayne Magnetic Handguard, Mate Guard and Polymer Handle Cover	3.3(1.5)
^ NOT LISTED		

New Light Duty Diesel Nozzles with M34 Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E1525297N [^]	with Two Notch Hold Open Clip, Mate Guard, Polymer Handle Cover and 1808 Waffle Splash Guard	3.3(1.5)
E15230297 [^]	with Two Notch Hold Open Clip, Wayne Magnetic Handguard, Mate Guard and Polymer Handle Cover	3.3(1.5)
^ NOT LISTED		



II 1 G
EN 13012
TYPE 1





WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

CONVENTIONAL FUELING

Dimensions

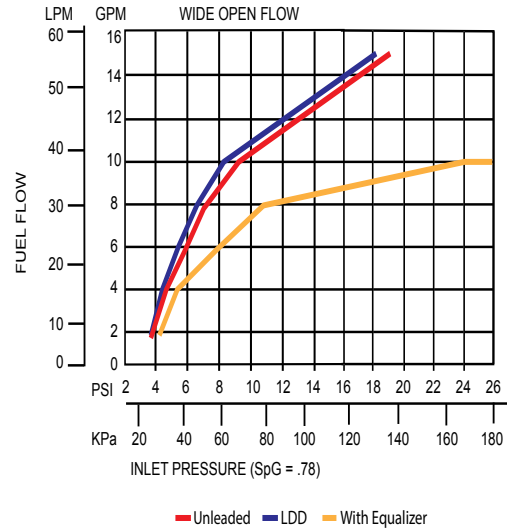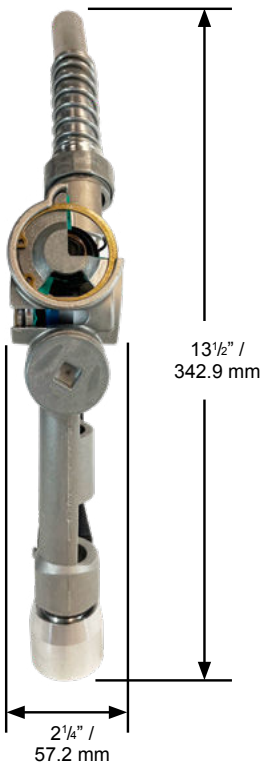

Construction

Body	Die cast aluminum body with high-impact polymer handguard and permanently-secured, machined aluminum inlet adapter
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon [®]
Lever	Two piece polymer EZ Lever
Inlet	1" (25.4 mm) NPT, 1" (25.4 mm) BSP or M34



Husky

GENERAL FUELING PRODUCTS

XS[®]

MF[®]

Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

POPD[®]S
Full Grip Guard

POPD[®]H
Full Grip Guard

Mate Guard

POPD[®]S
Mate Guard


POPD[®]H
Mate Guard



Waffle Guard Options

1807 Waffle Guard

1808 Waffle Guard

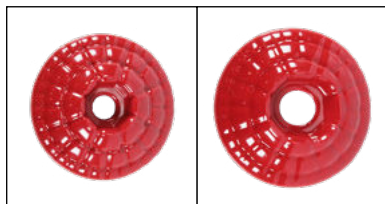

Handguard Options

Standard Polymer
Handguard

Gilbarco Polymer
Handguard
(with or without Magnet)

Tokheim Polymer
Handguard
(with or without Magnet)


Wayne Polymer
Handguard
(with or without Magnet)



Lever Options

Lever without Hold
Open Clip


Lever with Hold
Open Clip

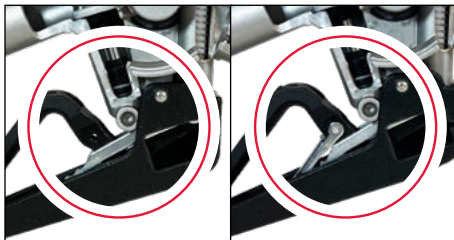

Latch Plate Options

1 - Position Latch Plate


2 - Position Latch Plate

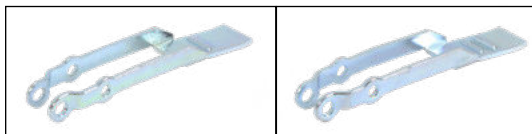

Sightglass Option



Flo-Equalizer[®] Option

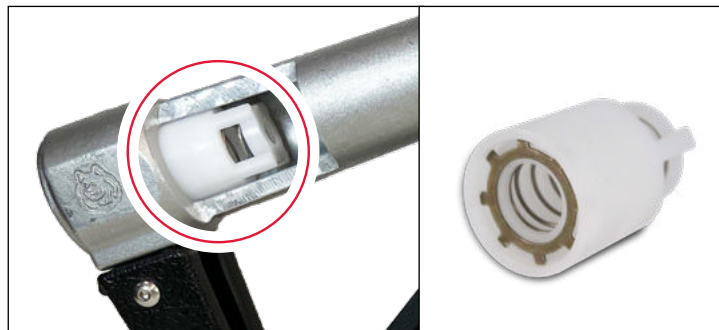



Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks[®]

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break [®]
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break [®]
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break [®] - Atex
005231	1" F x 1" F Low Pull NPT Reconnectable Safe-T-Break [®]
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break [®]
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break [®]
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break [®]
008331	3/4" F x 3/4" F NPT CK Reconnectable MAGBREAK [®]
009911	3/4" F x 3/4" F BSPP Reconnectable G2 MAGBREAK [®]

Swivel/Safe-T-Break[®] Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break [®]
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break [®]
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break [®] - Atex

Spouts

MODEL NO.	DESCRIPTION
001471	Light Duty Diesel Spout
001473	Unleaded Spout
010353	Light Duty Diesel Long Spout
010434	Unleaded Long Spout

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000397	Unleaded Spout Gauge
004490	Conventional Flo-Equalizer [®] - 10 gpm / 37.9 Lpm
007089	Nozzle Service Kit
007490	Internal Flo-Equalizer [®] - 10 gpm / 37.9 Lpm

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Multi-Plane Swivel
003306	1" M x 1" F BSPP Multi-Plane Swivel
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
004860	1" M x 1" F NPT Multi-Plane High Volume Swivel
006949	1" M x 1" F BSPP Multi-Plane High Volume Swivel

Guards

MODEL NO.	DESCRIPTION
001506	Protection Package
001806	Full Grip Reguard
001807	Waffle Splash Guard with Small Hole
001808	Waffle Splash Guard
001809	Reguard Protection Package
003440	Mate Easy-On Package
003795	Mate Guard
004145	Full Grip Guard
006628	POPD [®] S Clear Cover
006665	POPD [®] S Full Grip Guard
007205	POPD [®] S Full Grip Reguard
007361	Black Handle Cover
007999	POPD [®] H Clear Cover
008165	POPD [®] S Mate Guard
008166	POPD [®] H Mate Guard
008175	POPD [®] EZS Nozzle Guard
008176	POPD [®] EZH Nozzle Guard
008185	POPD [®] H Full Grip Guard
008192	POPD [®] H Full Grip Reguard
014524	International Mate Package
014530	International Mate Guard
015247	International POPD [®] H Mate Guard
015253	International POPD [®] H Mate Package

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 CUSTOM
Red	-02	Silver	-09	Apple Green	-18 CUSTOM
Green	-03	BP Green	-16	Purple	-19 CUSTOM
Black	-04	M Blue	-21	Pink	-20 CUSTOM
Yellow	-05	Orange	-39	BPS Green	-22 CUSTOM
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.