

1A EZL Nozzles



1A EZL

CONVENTIONAL FUELING

Automatic shut-off nozzle for full-service and self-service stations.

- 1A nozzle shuts off when the gas tank is full.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.
- Tilt poppet design provides precise “to-the-penny” dispensing.
- Comes standard with smooth full grip guard.
- Optional cold weather seals are rated to -40° F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser’s proximity switch, or can be provided without the magnet for dispensers equipped with a standard “Flapper” switch.



MODEL NO.
1426404N

New Unleaded PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1426404N [^]	with Two Notch Hold Open Clip and Polymer Handguard	3.3 (1.4)
		[^] NOT LISTED

New Light Duty Diesel PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1426403N [^]	with Two Notch Hold Open Clip and Polymer Handguard	3.3 (1.4)
		[^] NOT LISTED

New Light Duty Diesel PHG Nozzles with BSP Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E1064715N [^]	with Two Notch Hold Open Clip, Polymer Handguard, Mate Guard and Polymer Handle Cover, without UL Spout Groove	3.3 (1.4)
		[^] NOT LISTED




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



1A EZL Nozzles


Automatic shut-off nozzle for full-service and self-service stations.

Dimensions

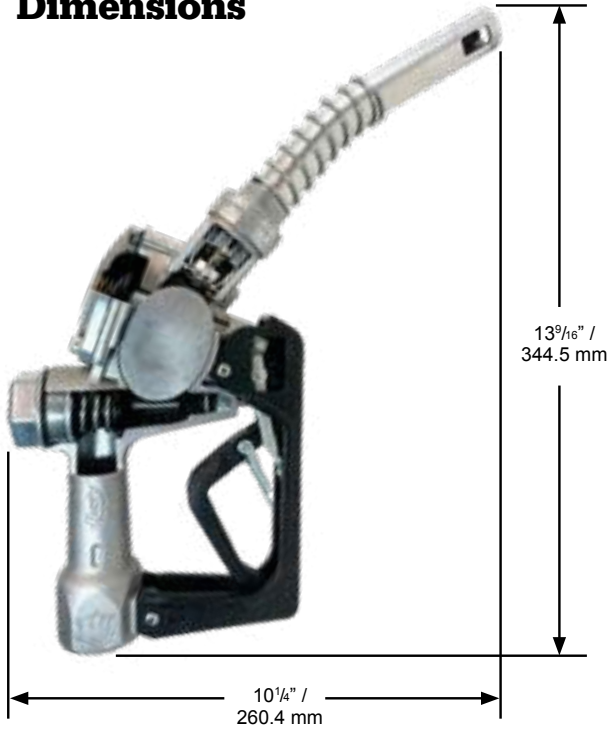

Construction

Body	One piece die cast aluminum with high-impact polymer or metal handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	Two piece polymer EZ lever
Inlet	1" (25.4 mm) NPT or 1" (25.4 mm) BSP

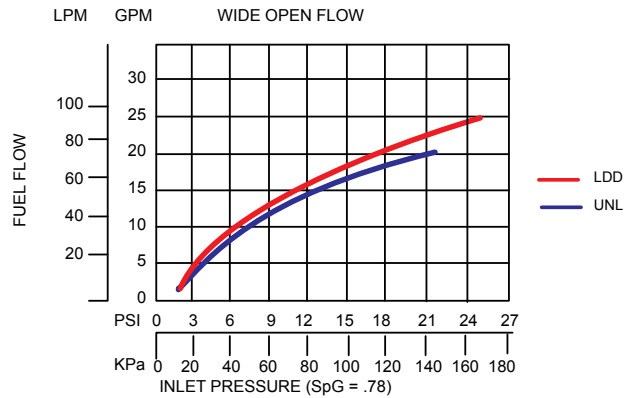



1A EZL Nozzles

Automatic shut-off nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

POPD[®]S Full Grip Guard

POPD[®]H Full Grip Guard

Mate Guard

POPD[®]S Mate Guard

POPD[®]H Mate Guard



Waffle Guard Options

1808 Waffle Guard



Handguard Options

Standard Polymer Handguard

Standard Metal Handguard

Gilbarco Polymer Handguard (with or without Magnet)

Tokheim Polymer Handguard (with or without Magnet)

Wayne Polymer Handguard (with or without Magnet)



Lever Options

Lever without Hold Open Clip


Lever with Hold Open Clip



Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

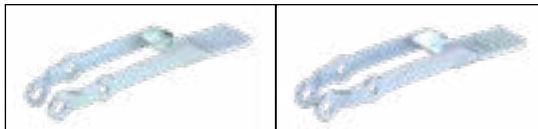

**Husky**

GENERAL FUELING PRODUCTS

1A EZL Nozzles

Automatic shut-off nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
005231	1" F x 1" F Low Pull NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®
008331	1" F x 1" F NPT CK Reconnectable MAGBREAK®
009911	1" F x 1" F BSPP Reconnectable G2 MAGBREAK®

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex Spouts

Spouts

MODEL NO.	DESCRIPTION
001471	Light Duty Diesel Spout
001473	Unleaded Spout
010353	Light Duty Diesel Long Spout
010434	Unleaded Long Spout

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000385	1" M x 3/4" F Reducer Bushing
000397	Unleaded Spout Gauge
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Multi-Plane Swivel
000352	1" M x 3/4" F NPT Multi-Plane Swivel
000356	1" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
003306	1" M x 1" F BSPP Multi-Plane Swivel
003306A	1" M x 1" F BSPP Multi-Plane Swivel - Atex
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
004860	1" M x 1" F NPT Multi-Plane High Volume Swivel
006949	1" M x 1" F BSPP Multi-Plane High Volume Swivel

Guards

MODEL NO.	DESCRIPTION
000099	Protection Package
000226	Mate Nozzle Guard
000554	Full Grip Guard
001804	Full Grip Reguard
001808	Waffle Splash Guard
001811	Reguard Protection Package
005494	Lever Guard
006628	POPD® S Clear Cover
001808	Protection Package
006655	POPD® S Full Grip Guard
007210	POPD® S Full Grip Reguard
007999	POPD® H Clear Cover
008169	POPD® S Mate Nozzle Guard
008170	POPD® H Mate Nozzle Guard
008179	POPD® EZS Nozzle Guard
008180	POPD® EZH Nozzle Guard
008183	POPD® H Full Grip Guard
008190	POPD® H Full Grip Reguard

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-25	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.