1AS Nozzles



Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

- 1AS nozzle shuts off when:
- the pump shuts off.
- the gas tank is full.
- the lever is opened before the pump is turned on.
- the leak detector has not completed the test cycle.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.

- Optional tilt poppet design provides precise "to-thepenny" dispensing.
- Optional cold weather seals are rated to -40°F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.

New Unleaded PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1215904	with Three Notch Hold Open Clip Handguard	and Polymer 3.3 (1.4)
12159209	with Three Notch Hold Open Clip and 385 Reducer Bushing	, Polymer Handguard 3.4 (1.5)

New Light Duty Diesel PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
		• • • • • • • • • • • • • • • • • • • •
1215903	with Three Notch Hold Open Clip	,
	Handguard	3.3 (1.4)
1215961	with Three Notch Hold Open Clip	, Polymer Handguard
	and 1808 Waffle Splash Guard	3.4 (1.5)
1398903	with Three Notch Hold Open Clip	, Polymer Handguard
	and Cold Weather Seals	3.3 (1.4)
12159208	with Three Notch Hold Open Clip	, Polymer Handguard
	and 385 Reducer Bushing	3.4 (1.5)
12159211	with Three Notch Hold Open Clip	, Polymer Handguard,
	1808 Waffle Splash Guard, and Dr	rip Less Spout 3.4 (1.5)
E1215903	with Three Notch Hold Open Clip	, Polymer Handguard,
	Mate Guard and Polymer Handle	Cover 3.3 (1.4)



MODEL NO. 1215904








WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

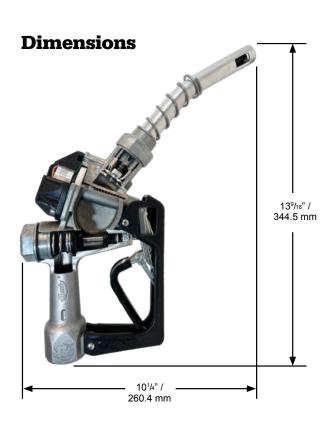

New Unleaded MHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1216204	with Three Notch Hold Open Cli	p and Metal
	Handguard	3.5 (1.6)


New Light Duty Diesel MHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION SHI	IPPING WEIGHT LBS (KG)
1216203	with Three Notch Hold Open Clip and Handguard	Metal 3.5 (1.6)
1399203	with Three Notch Hold Open Clip, Met and Cold Weather Seals	tal Handguard 3.5 (1.6)

Construction

Body	One piece die cast aluminum with high-impact polymer or metal handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	One piece contoured steel with hard polymer lever cover
Inlet	1" (25.4 mm) NPT or 1" (25.4 mm) BSP





Rev 0 1/24 34



1AS Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options



Waffle Guard Options

1808 Waffle Guard



Reducer Bushing

000385



Handguard Options

Standard Polymer Handguard (with or without Magnet)

Standard Metal Handguard

Handguard

Standard Metal Handguard

Wayne Polymer Handguard
(with or without Magnet)

Wayne Polymer Handguard
(with or without Magnet)

Wayne Polymer Handguard
(with or without Magnet)

Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip



Latch Plate Options

1 - Position Latch Plate 2 - Position Latch Plate 3 - Position Latch Plate

Rev 0 1/24 35



1AS Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
005231	1" F x 1" F Low Pull NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®
008331	1" F x 1" F NPT CK Reconnectable MAGBREAK®
009911	1" F x 1" F BSPP Reconnectable G2 MAGBREAK®

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex Spouts

Spouts

MODEL NO.	DESCRIPTION
001471	Light Duty Diesel Spout
001473	Unleaded Spout
010353	Light Duty Diesel Long Spout
010434	Unleaded Long Spout

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000385	1" M x 3/4" F Reducer Bushing
000397	Unleaded Spout Gauge
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Multi-Plane Swivel
000352	1" M x 3/4" F NPT Multi-Plane Swivel
000356	1" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
003306	1" M x 1" F BSPP Multi-Plane Swivel
003306A	1" M x 1" F BSPP Multi-Plane Swivel - Atex
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
004860	1" M x 1" F NPT Multi-Plane High Volume Swivel
006949	1" M x 1" F BSPP Multi-Plane High Volume Swivel

Guards

MODEL NO.	DESCRIPTION
001807	Waffle Splash Guard with Smaller Hole
001808	Waffle Splash Guard
005494	Lever Guard
007295	Polymer Handle Cover
012164	Full Grip Guard

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сиѕтом
Red	-02	Silver	-09	Apple Green	-18 сиѕтом
Green	-03	■ BP Green	-16	Purple	-19 сиѕтом
Black	-04	M Blue	-25	Pink	-20 сиѕтом
Yellow	-05	Orange	-39	BPS Green	-22 сиѕтом
☐ White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com



