

1HS Nozzles



1HS

TRUCK AND HIGH VOLUME

Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

- 1HS nozzle shuts off when the gas tank is full.
- Comes standard with smooth full grip guard.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- Optional cold weather seals are rated to -40 °F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.

New Heavy Duty Diesel PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
026812	without Hold Open Clip, with Polymer Handguard	3.4 (1.5)
026810N^	with Three Notch Hold Open Clip and Polymer Handguard	3.4 (1.5)
026865N^	with Three Notch Hold Open Clip, Polymer Handguard and 1808 Waffle Splash Guard	3.5 (1.6)
1489910N^	with Three Notch Hold Open Clip and Tokheim Magnetic Handguard	3.5 (1.6)

^ NOT LISTED

New Heavy Duty Diesel PHG Nozzles with BSP Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
-026838A	with Three Notch Hold Open Clip and Polymer Handguard	3.4 (1.5)
026838N^	with Three Notch Hold Open Clip and Polymer Handguard	3.4 (1.5)
-E1522638A	with Three Notch Hold Open Clip, Tilt Poppet, Wayne Magnetic Handguard, Mate Guard and Polymer Handle	3.5 (1.6)

^ NOT LISTED



MODEL NO.
026812




II 1 G
EN 13012
TYPE 2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

Dimensions

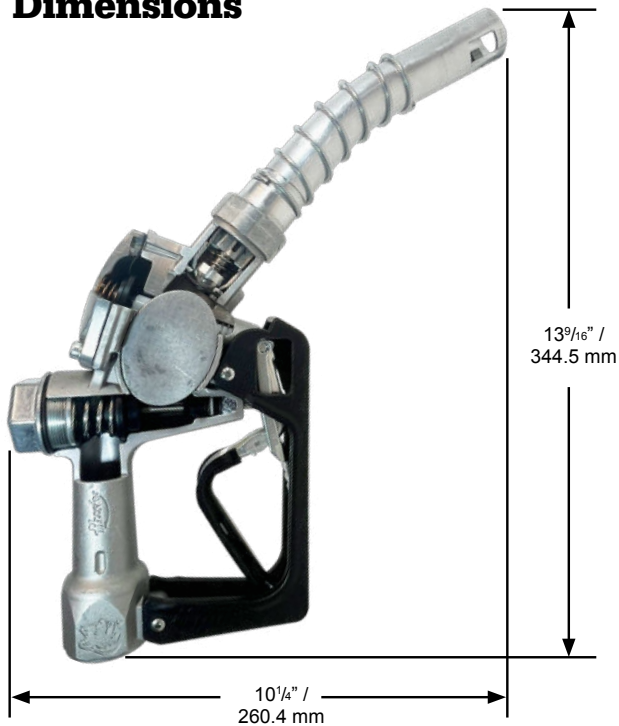

New Heavy Duty Diesel MHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696312	without Hold Open Clip, with Metal Handguard	3.6 (1.6)
696310N^	with Three Notch Hold Open Clip and Metal Handguard	3.6 (1.6)
696365N^	with Three Notch Hold Open Clip, Metal Handguard and 1808 Waffle Splash Guard	3.7 (1.7)

^ NOT LISTED


New Heavy Duty Diesel MHG Nozzles with BSP Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
696338N^	with Three Notch Hold Open Clip and Metal Handguard	3.6 (1.6)

^ NOT LISTED

Construction

Body	One piece die cast aluminum with high-impact polymer or metal handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	One piece contoured steel with hard polymer lever cover
Inlet	1" (25.4 mm) NPT or 1" (25.4 mm) BSP

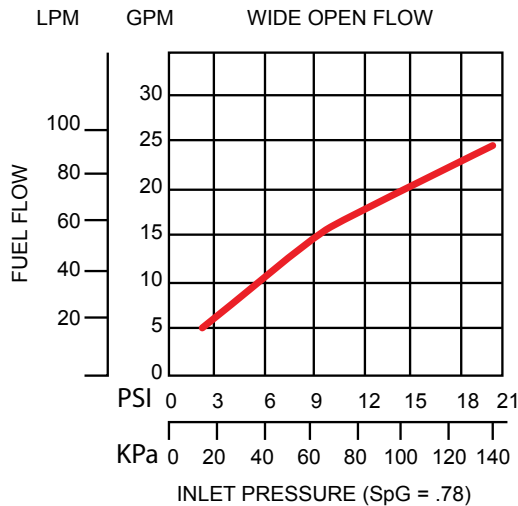

Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

Nozzle Options

Nozzle Guard Options




Waffle Guard Options

1808 Waffle Guard




Handguard Options

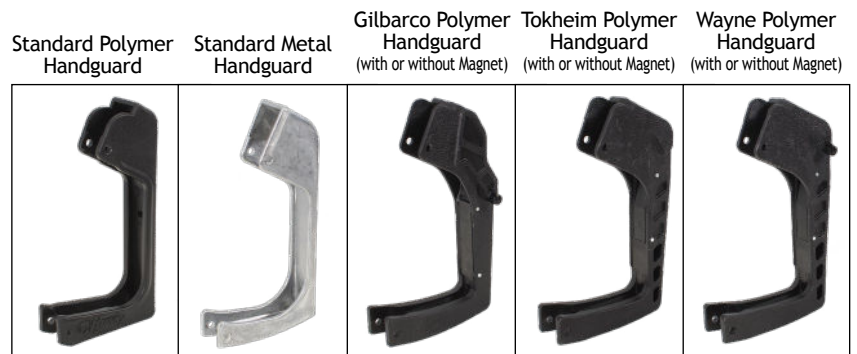

Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip

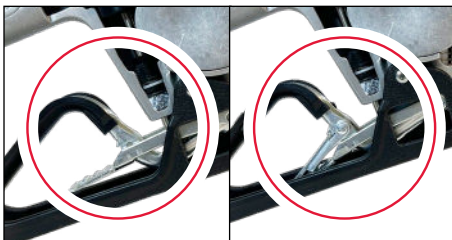

Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

3 - Position Latch Plate





Automatic shut-off nozzle with polymer handguard for dispensing up to 25 gpm / 94.6 Lpm.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002276	1" F x 1" F NPT Reconnectable Safe-T-Break®
003076	1" F x 1" F BSPP Reconnectable Safe-T-Break®
003076A	1" F x 1" F BSPP Reconnectable Safe-T-Break® - Atex
005231	1" F x 1" F Low Pull NPT Reconnectable Safe-T-Break®
005812	1" F x 1" F NPT Non-Reconnectable Safe-T-Break®
006301	1" F x 1" F NPT Non-Reconnectable PCC Safe-T-Break®
006914	1" F x 1" F BSPP Non-Reconnectable Safe-T-Break®
008331	1" F x 1" F NPT CK Reconnectable MAGBREAK®
009911	1" F x 1" F BSPP Reconnectable G2 MAGBREAK®

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
005969	1" M NPT Multi-Plane Swivel connected to 1" F NPT Reconnectable Safe-T-Break®
008015	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break®
008015A	1" M BSPP Multi-Plane Swivel connected to 1" F BSPP Reconnectable Safe-T-Break® - Atex Spouts

Spouts

MODEL NO.	DESCRIPTION
005215	Heavy Duty Diesel Spout

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000385	1" M x 3/4" F Reducer Bushing
000397	Unleaded Spout Gauge
003593	Hold Open Clip Kit
007089	Nozzle Service Kit

Swivels

MODEL NO.	DESCRIPTION
000087	1" M x 1" F NPT Multi-Plane Swivel
000095	1" M x 1" F NPT 70° Multi-Plane Swivel
000352	1" M x 3/4" F NPT Multi-Plane Swivel
000356	1" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
003306	1" M x 1" F BSPP Multi-Plane Swivel
003306A	1" M x 1" F BSPP Multi-Plane Swivel - Atex
003395	1" M x 1" F NPT Multi-Plane Restricted Swivel
004860	1" M x 1" F NPT Multi-Plane High Volume Swivel
006949	1" M x 1" F BSPP Multi-Plane High Volume Swivel

Guards

MODEL NO.	DESCRIPTION
000099	Protection Package
000226	Mate Nozzle Guard
000554	Full Grip Guard
001804	Full Grip Reguard
001808	Waffle Splash Guard
001811	Reguard Protection Package
005494	Lever Guard
006628	POPD® S Clear Cover
006655	POPD® S Full Grip Guard
007210	POPD® S Full Grip Reguard
007295	Mate Handle Guard
007999	POPD® H Clear Cover
008169	POPD® S Mate Nozzle Guard
008170	POPD® H Mate Nozzle Guard
008179	POPD® EZS Nozzle Guard
008180	POPD® EZH Nozzle Guard
008183	POPD® H Full Grip Guard
008190	POPD® H Full Grip Reguard

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-25	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.