

XS E25 EZL Nozzles



XS E25
EZL

CONVENTIONAL ETHANOL FUELING

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

- XS E25 EZL nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent ti-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.
- New poppet seal design in conjunction with new tilt poppet design improves flow control (“to-the-penny” dispensing) and provides enhanced endurance over time.
- Optional cold weather seals are rated to -40° F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser’s proximity switch, or can be provided without the magnet for dispensers equipped with a standard “flapper” switch.
- All seals are UL approved fluorocarbon compounds to prevent degradation from Ethanol blends.
- Compatible with unleaded and all Ethanol blends through E-25.
- Comes standard with smooth full grip guard.

New Unleaded Nozzles with NPT Inlet

| MODEL NO. | DESCRIPTION | SHIPPING WEIGHT LBS (KG) |
|-----------|--|--------------------------|
| 1503259 | with Two Notch Hold Open Clip and 1808 Waffle Splash Guard | 3.1 (1.4) |
| 1503204N^ | with Two Notch Hold Open Clip | 3.0 (1.4) |
| E1503204 | with Two Notch Hold Open Clip, Mate Guard and Polymer Handle Cover | 3.0 (1.4) |
| E1503259 | with Two Notch Hold Open Clip, Mate Guard, Polymer Handle Cover and 1808 Wa e Splash Guard | 3.1 (1.4) |

^ NOT LISTED



MODEL NO.
1503259





WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



XS E25 EZL Nozzles


Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Dimensions

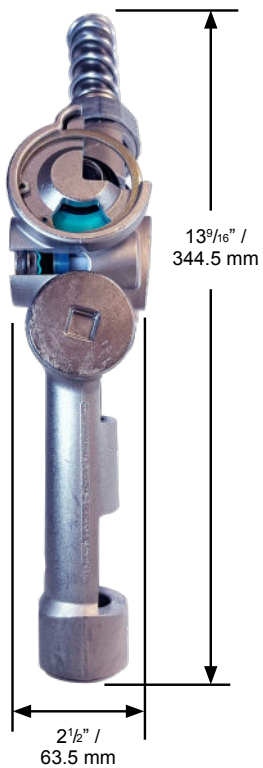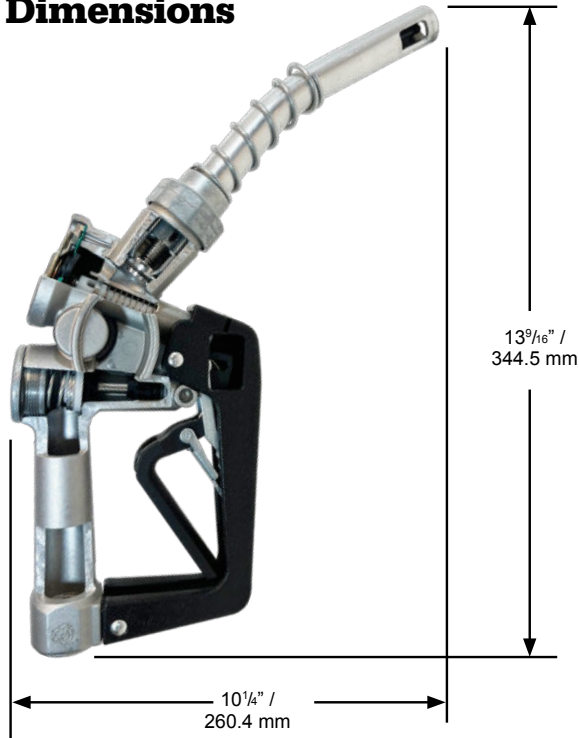

Construction

| | |
|---------|--|
| Body | Die cast aluminum with high-impact polymer handguard |
| Seals | Fluorocarbon |
| Packing | Double o-ring seal protected by fiber-reinforced Teflon® |
| Lever | Two piece polymer EZ Lever |
| Inlet | 3/4" (19 mm) NPT or 3/4" (19 mm) BSP |

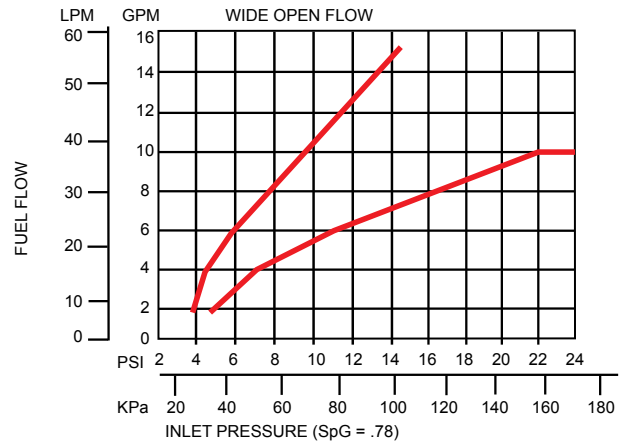



XS E25 EZL Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options



Waffle Guard Options

1808 Waffle Guard



Handguard Options


| | | | |
|----------------------------|---|--|--|
| Standard Polymer Handguard | Gilbarco Polymer Handguard (with or without Magnet) | Tokheim Polymer Handguard (with or without Magnet) | Wayne Polymer Handguard (with or without Magnet) |
|----------------------------|---|--|--|



Lever Options

Lever without Hold Open Clip


Lever with Hold Open Clip

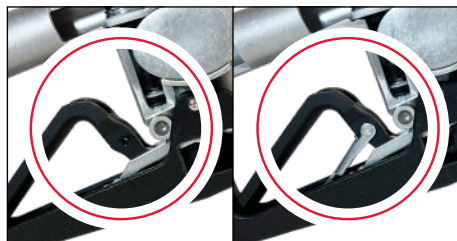

Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

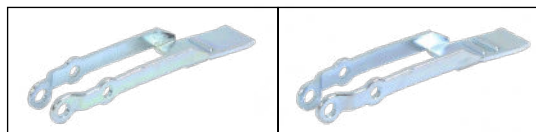



XS E25 EZL Nozzles

Pressure-activated, automatic shut-off nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

| MODEL NO. | DESCRIPTION |
|---------------------|---|
| 006273 | 3/4" F x 3/4" F Non-Reconnectable E85 Safe-T-Break® Trebuchet MS |
| 006360 [^] | 3/4" F x 3/4" F Reconnectable E25/E85 Safe-T-Break® |

Spouts

| MODEL NO. | DESCRIPTION |
|-----------|-----------------------------|
| 006207 | Unleaded E85 Spout Assembly |

Pressure/Vacuum Vents

| MODEL NO. | DESCRIPTION |
|-----------|--|
| 004620 | 2" Slip-On Pressure Vacuum Vent |
| 004885 | 2" Thread-On Pressure Vacuum Vent - NPT |
| 005885 | 2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT |

Accessories, Testing and Maintenance

| MODEL NO. | DESCRIPTION |
|-----------|---|
| 000397 | Unleaded Spout Gauge |
| 003593 | Hold Open Clip Kit |
| 007089 | Nozzle Service Kit |
| 007490 | Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm |

Swivels

| MODEL NO. | DESCRIPTION |
|---------------------|--|
| 006350 [^] | 3/4" M x 3/4" F NPT Multi-Plane E85 Swivel |

Guards

| MODEL NO. | DESCRIPTION |
|-----------|-------------------------------------|
| 001506 | Protection Package |
| 001806 | Full Grip Reguard |
| 001807 | Waffle Splash Guard with Small Hole |
| 001808 | Waffle Splash Guard |
| 001809 | Reguard Protection Package |
| 003440 | Mate Easy-On Package |
| 003795 | Mate Guard |
| 004145 | Full Grip Guard |
| 006628 | POPD® S Clear Cover |
| 006665 | POPD® S Full Grip Guard |
| 007205 | POPD® S Full Grip Reguard |
| 007361 | Black Handle Cover |
| 007999 | POPD® H Clear Cover |
| 008165 | POPD® S Mate Guard |
| 008166 | POPD® H Mate Guard |
| 008175 | POPD® EZS Nozzle Guard |
| 008176 | POPD® EZH Nozzle Guard |
| 008185 | POPD® H Full Grip Guard |
| 008192 | POPD® H Full Grip Reguard |
| 014524 | International Mate Package |
| 014530 | International Mate Guard |
| 015247 | International POPD® H Mate Guard |
| 015253 | International POPD® H Mate Package |

Guard Color Chart

| COLOR | SUFFIX | COLOR | SUFFIX | COLOR <i>CUSTOM</i> | SUFFIX |
|--------|--------|----------|--------|---------------------|-------------------|
| Blue | -01 | Gold | -08 | Amoco Blue | -07 <i>CUSTOM</i> |
| Red | -02 | Silver | -09 | Apple Green | -18 <i>CUSTOM</i> |
| Green | -03 | BP Green | -16 | Purple | -19 <i>CUSTOM</i> |
| Black | -04 | M Blue | -25 | Pink | -20 <i>CUSTOM</i> |
| Yellow | -05 | Orange | -39 | BPS Green | -22 <i>CUSTOM</i> |
| White | -06 | | | | |

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.