

Automatic shut-off conventional nozzle equipped with mechanical interlock.

- ECO nozzle shuts off when:
 - the gas tank is full.
 - the mechanical interlock is disengaged, or the nozzle falls from the vehicle's fill pipe.
- Nozzle is also equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal for added security.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- *StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Drip Less spout reduces/eliminates drips from spout.
- Lightest insertion "force" of any safety interlock-operated nozzle.
- Aluminum casting with high-impact polymer handguard provides a lightweight, easier to handle conventional nozzle.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.
- Unique tilt poppet design provides precise "to-the-penny" dispensing.
- Optional cold weather seals are rated to -40° F/C.
- CARB certified per CP-207 for drips, spills, spitting and liquid retention.
- Comes standard with smooth full grip guard.


New Unleaded PHG Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1190404*	with Two Notch Hold Open Clip	2.8 (1.3)
1190408*	without Hold Open Clip	2.8 (1.3)
1190416*	with Two Notch Hold Open Clip	2.8 (1.3)
1474504	with Two Notch Hold Open Clip and Cold Weather Seals	2.8 (1.3)
11904180*	with Two Notch Hold Open Clip and Flo-Equalizer®	2.8 (1.3)
E1190404*	without Hold Open Clip, with Mate Guard and Polymer Handle Cover	2.8 (1.3)



MODEL NO.
1190404




 WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Automatic shut-off conventional nozzle equipped with mechanical interlock.



CONVENTIONAL FUELING

Dimensions

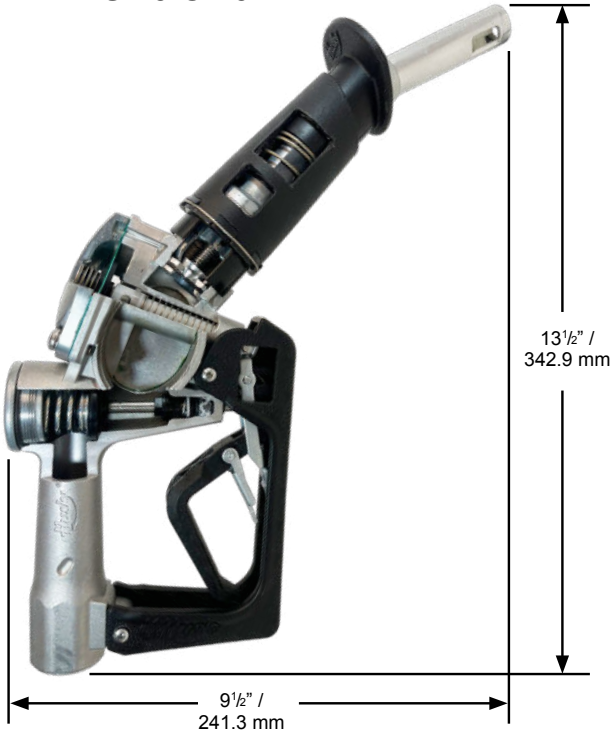

Construction

Body	One piece die cast aluminum with high-impact polymer handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	Two piece polymer EZ Lever
Inlet	3/4" (19 mm) NPT or 3/4" (19 mm) BSP

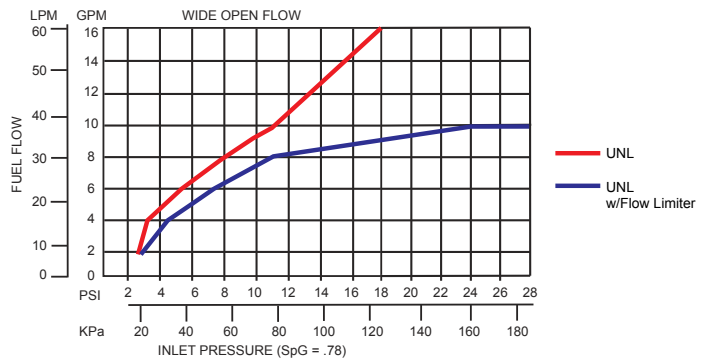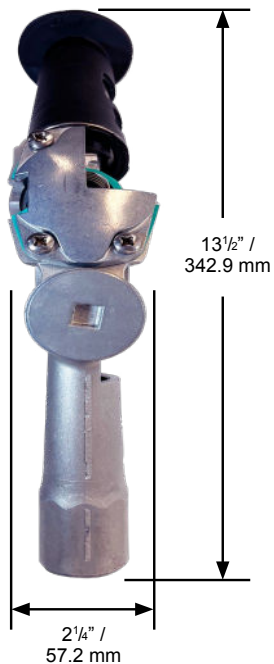

Automatic shut-off conventional nozzle equipped with mechanical interlock.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

POPD[®]S
Full Grip Guard

POPD[®]H
Full Grip Guard

Mate Guard

POPD[®]S
Mate Guard


POPD[®]H
Mate Guard



Lever Options

Lever without Hold
Open Clip


Lever with Hold
Open Clip

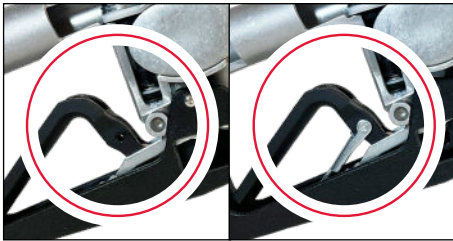

Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

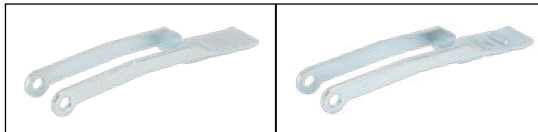

Flo-Equalizer[®] Option





Automatic shut-off conventional nozzle equipped with mechanical interlock.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
002273	3/4" F x 3/4" F NPT Non-Reconnectable Safe-T-Break®
002774	3/4" F x 3/4" F BSPP Non-Reconnectable Safe-T-Break®
003360	3/4" F x 3/4" F NPT Reconnectable Safe-T-Break®
003385	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break®
005230	3/4" F x 3/4" F NPT Low Pull Reconnectable Safe-T-Break®
006130	3/4" F x 3/4" F NPT Non-Reconnectable PCC Safe-T-Break®
008330	3/4" F x 3/4" F NPT Reconnectable MAGBREAK®
009910	3/4" F x 3/4" F BSPP Reconnectable MAGBREAK®
010328	3/4" F x 3/4" F NPT Reconnectable High Pull MAGBREAK®
010330	3/4" F x 3/4" F BSPP Reconnectable High Pull MAGBREAK®
002774A	3/4" F x 3/4" F BSPP Non-Reconnectable Safe-T-Break® - Atex
003385A	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break® - Atex

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	3/4" M NPT Multi-Plane Swivel connected to 3/4" F NPT Reconnectable Safe-T-Break®
007085	3/4" M BSPP Multi-Plane Swivel connected to 3/4" F BSPP Reconnectable Safe-T-Break®
007085A	3/4" M BSPP Multi-Plane Swivel connected to 3/4" F BSPP Reconnectable Safe-T-Break® - Atex

Spouts

MODEL NO.	DESCRIPTION
013664	Unleaded ECO Spout Assembly Kit

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000397	Unleaded Spout Gauge
003593	Hold Open Clip Kit
004490	Conventional Flo-Equalizer® - 10 gpm / 37.9 Lpm
007089	Nozzle Service Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm

Swivels

MODEL NO.	DESCRIPTION
000350	3/4" M x 3/4" F NPT Multi-Plane Swivel
000355	3/4" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
002272	3/4" M x 3/4" F NPT 90° Pump Swivel
002771	3/4" M x 3/4" F BSPP 90° Pump Swivel
002950	3/4" M x 3/4" F NPT Multi-Plane Restricted Swivel
003590	3/4" M x 3/4" F BSPP Multi-Plane Swivel
003895	3/4" M x 3/4" F NPT Inline Swivel
002771A	3/4" M x 3/4" F BSPP 90° Pump Swivel - Atex
003590A	3/4" M x 3/4" F BSPP Multi-Plane Swivel - Atex

Guards

MODEL NO.	DESCRIPTION
014034	Full Grip Nozzle Guard
015990	Mate Nozzle Guard
015431	Handle Cover

Low Perm Hoses

MODEL NO.	DESCRIPTION
CP12LP8.5	3/4" Low Perm Hardwall 8.5' Assembly Hose
CP12LP8.5SV	3/4" Low Perm Hardwall 8.5' Assembly Hose Swivel
CP12LP9	3/4" Low Perm Hardwall 9' Assembly Hose
CP12LP9SV	3/4" Low Perm Hardwall 9' Assembly Hose Swivel
CP12LP.75	3/4" Low Perm Hardwall 9' Assembly Hose
CP12LP.75SV	3/4" Low Perm Hardwall 9' Assembly Hose Swivel

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-25	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.