
# SST DEF Nozzles



### Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- SST DEF nozzle shuts off when tank is full.
- Modular design for easy cleaning.
- Constructed from materials 100% compatible with Diesel Exhaust Fluid (DEF).
- Available with magnetic Accufuel® safety feature.
- Equipped with a unique Flo-Stop<sup>®</sup> device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.



 Stainless Steel construction.

### **DEF Nozzles with 1" BSPP**

MODEL NO.	DDEL NO. DESCRIPTION SHIPPING WE	
731004N^	with Two Notch Hold Open Clip;	4.6 (2.1)
731088N^	with Two Notch Hold Open Clip and Spout Ring;	4.6 (2.1)
731091N^	with Two Notch Hold Open Clip, Spout Ring and magnetic Accufuel® Spout	4.6 (2.1)
7310192N^	with Two Notch Hold Open Clip, Spout Ring, Grounding Cable and Spout Cap	4.6 (2.1)
		^ NOT LISTED

#### **DEF Nozzles with M34**

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (Ke	G)	
1043691N^	with Two Notch Hold Open Clip, Spout Ring, magnetic			
	Accufuel <sup>®</sup> Spout,	and Waffle Guard 4.6 (2.	1)	
-			_	

^ NOT LISTED




MODEL NO. 731004N






# Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

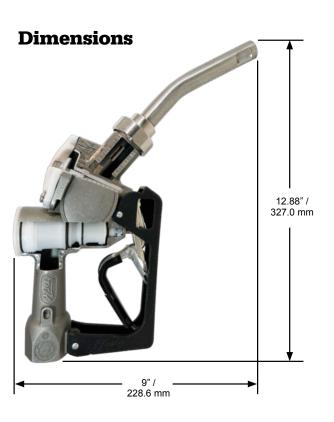

### Construction

Investment Cast Stainless Steel		
Seals Fluorocarbon		
Packing Double o-ring seal protected by fiber reinforced Teflon®		
ver One piece contoured steel with hard plastic cover		
Inlet 1" / 25.4 mm BSPP or M34 x 1.5		

SST DEF NOZZLE AVERAGE BACK PRESSURE PERFORMANCE VERIFICATION







Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

# **Nozzle Options**

# Nozzle Guard Options



Waffle Guard Options


1808 Waffle Guard



## Handguard Options



## Latch Plate Options



DIESEL EXHAUST FLUID

# Husky General fueling products SST DEF Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

# **System Options**

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
007219	1" M x 1" M BSPP Non-Reconnectable Stainless Steel Safe-T-Break®
008216	1" M x 1" M BSPP Reconnectable Stainless Steel Safe-T-Break®

### **Accessories, Testing and Maintenance**

MODEL NO.	DESCRIPTION		
007150 Poppet Valve / Venturi Cartridge Assembly			
007160 Plunger Cartridge Assembly			
007163	Loss Motion Diaphragm Cartridge Assembly		
007523	1" BSPP Seal Kit Assembly		

## Swivels

MODEL NO.	DESCRIPTION
007269	1" M x 1" M BSPP Inline Swivel
007275	1" M BSPP x M34 M Inline Swivel
007282	3/4" M BSPP x 3/4" Hose Barb Roller Bearing Inline Swivel
007467	1" F x 1" M BSPP Inline Swivel
008510	1" M BSPP 1" F NPT Inline Swivel
010936	3/4" M BSPP X 3/4" Hose Barb Inline Swivel

### Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION			
013185	M34 M NPT Multi-Plane Swivel connected to 1" BSP M Reconnectable Safe-T-Break®			
014438	1" BSP M Multi-Plane Swivel connected to 1" BSP M Reconnectable Safe-T-Break®			

### Spouts

MODEL NO.	DESCRIPTION
007360	with Spout Ring and Flo-Stop®
007362	with Flo-Stop®
007364	with Spout Ring and Magnetic Accufuel® Safety Feature

### Guards

MODEL NO.	DESCRIPTION
000226	Mate Nozzle Guard
000554	Full Grip Guard
001808	Waffle Splash Guard
007376	Handle Cover (Black)
008429	DEF Handguard Repair Kit

### Adaptors

MODEL NO.	DESCRIPTION
007285	1" M x 1" M BSPP Straight Adaptor
007356	1" M BSPP x M M34 Straight Adaptor
008413	1" M BSPP x 3/4" Hose Barb Adaptor with Seal Kit

### **Guard** Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сизтом
Red	-02	Silver	-09	Apple Green	-18 сизтом
Green	-03	BP Green	-16	Purple	-19 сизтом
Black	-04	M Blue	-25	Pink	-20 сизтом
Yellow	-05	Orange	-39	BPS Green	-22 сизтом
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



