

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- X DEF EZL nozzle shuts off when tank is full.
- Lighter than stainless steel nozzles.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Less expensive than comparable nozzles.
- Tilt poppet design provides precise "to-the-penny" dispensing.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.

- Stainless steel spout for durability.
- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard 22241-2:2006.
- Aluminum body is anodized to prevent contamination from DEF blends.

New X DEF Nozzle with 3/4" BSPP

12964154N^ with Two Notch Hold Open Clip, EZ Lever and Wayne Magnetic Handguard without Spout Groove 3.0 (1.3 13410204N^ with Two Notch Hold Open Clip, EZ Lever, without Spout Groove 3.0 (1.3	MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KO
	12964154N^	1 17	
	13410204N^		

^ NOT LISTED



MODEL NO. 12964154N








 $WARNING: Cancer \ and \ Reproductive \ Harm-www.P65Warnings.ca.gov$

Rev 0 4/24 109



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

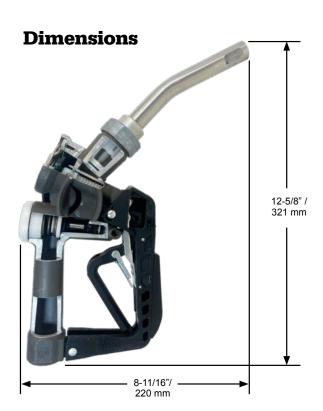




Construction

Body Die cast, anodized aluminum with high-impact polymer handguard		
Seals	Fluorocarbon	
Spout	oout 19 mm diameter	
Packing	Double o-ring seal protected by fiber-reinforced Teflon®	
Lever Two-piece polymer EZ lever		
Inlet 19 mm BSPP		

X DEF NOZZLE AVERAGE BACK PRESSURE PERFORMANCE VERIFICATION



Rev 0 4/24 110



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard Mate Guard

Waffle Guard **Options**

1808 Waffle Guard



Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip



Handguard Options

Standard Polymer Handguard

Handguard (with or without Magnet)

Gilbarco Polymer Tokheim Polymer Handguard (with or without Magnet)

Wayne Polymer Handguárd (with or without Magnet)









Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate





Rev 0 4/24 111



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
012659	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION		
007282	3/4" M BSPP x 3/4" Hose Barb Roller Bearing Inline Swivel		
010936	3/4" M BSPP x 3/4" Hose Barb Inline Swivel		
012656	3/4" M x 3/4" F BSPP Roller Bearing Inline Swivel		

Spouts

MODEL NO.	DESCRIPTION		
007360 with Spout Ring and Flo-Stop®			
007362	with Flo-Stop®		
007364	with Spout Ring and Magnetic Accufuel® Safety Feature		

Guards

	MODEL NO.	DESCRIPTION
001808 Waffle Splash Guard		Waffle Splash Guard
	003795	Mate Nozzle Guard
	007361	Handle Cover (Black)
014114 Inter		International Mate Nozzle Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION			
007522	3/4" BSPP Seal Kit Assembly			
013285	with StreamShaper®			

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
012828	3/4" BSP M Multi-Plane Swivel connected to 3/4" BSP F Reconnectable Safe-T-Break®
012887	3/4" BSP M Multi-Plane Swivel connected to 1" BSP F Reconnectable Safe-T-Break®
012890	3/4" BSP M Multi-Plane Swivel connected to 1" BSP M Reconnectable Safe-T-Break®

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сиѕтом
Red	-02	Silver	-09	Apple Green	-18 сиѕтом
Green	-03	■ BP Green	-16	Purple	-19 сиѕтом
Black	-04	M Blue	-25	Pink	-20 сиѕтом
Yellow	-05	Orange	-39	BPS Green	-22 сиѕтом
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



Rev 0 4/24

2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com

