

X DEF LV Nozzles



X DEF LV

DIESEL EXHAUST FLUID

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- X DEF LV nozzle shuts off when tank is full.
- Lighter than stainless steel nozzles.
- Spout is designed to protect against misfilling into the diesel tank, dispensing of DEF is only possible in conjunction with filling points to ISO 22241-5.
- Less expensive than comparable nozzles.
- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard ISO 22241-5:2019(E).
- Maximum flow rate 2.6 gpm (10 Lpm).

New X DEF Nozzle with 1" BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
*15948275A	with One Notch Hold Open Clip, EZ Lever and Gilbarco Magnetic Hand Guard	3.0 (1.3)
		^ NOT LISTED

New X DEF Nozzle with M34

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
15948276N^	with One Notch Hold Open Clip, EZ Lever and Gilbarco Magnetic Hand Guard	3.0 (1.3)
		^ NOT LISTED



MODEL NO.
15948275A



II 1 G
EN13617
Type 2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Dimensions



Construction

Body	Die cast, anodized aluminum with high-impact polymer handguard
Seals	Fluorocarbon o-rings and diaphragm
Spout	19 mm diameter
Lever	One-piece contoured polymer
Inlet	1" / 25.4 mm BSPP or M34 x 1.5 mm

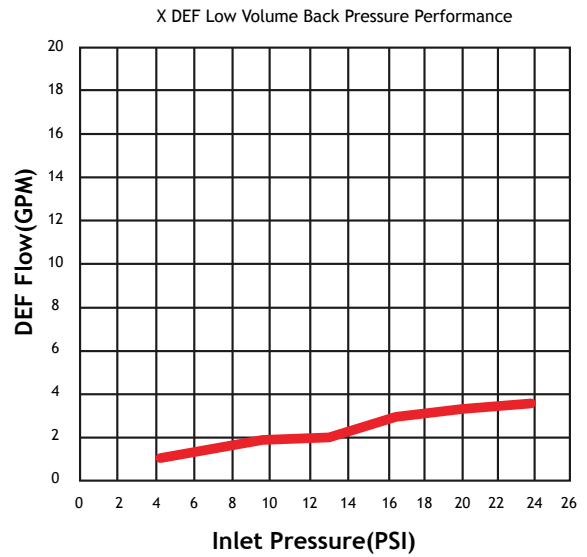



X DEF LV Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

Mate Guard




Handguard Options

Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip

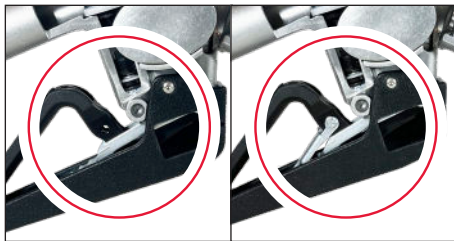

Standard Polymer Handguard

Gilbarco Polymer Handguard (with or without Magnet)

Tokheim Polymer Handguard (with or without Magnet)

Wayne Polymer Handguard (with or without Magnet)



Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

3 - Position Latch Plate





X DEF LV Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

System Options

Guards

MODEL NO.	DESCRIPTION
003795	Mate Nozzle Guard
004145	Full Nozzle Guard
007361	Handle Cover (Black)
014114	International Mate Nozzle Guard

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
013185	M34 Single-Plane Swivel connected to 1" BSPP Service Reconnectable Safe-T-Break®
014438	1" BSPP Single-Plane Swivel connected to 1" BSPP Service Reconnectable Safe-T-Break®
*014438A	1" BSPP Single-Plane Swivel connected to 1" BSPP Service Reconnectable Safe-T-Break®

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-25	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.