

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- X DEF M34 nozzle shuts off when tank is full.
- Lighter than stainless steel nozzles.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Less expensive than comparable nozzles.
- Tilt poppet design provides precise "to-the-penny" dispensing.
- Stainless steel spout for durability.

- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard 22241-2;2006.
- Aluminum body is anodized to prevent contamination from DEF blends.

New X DEF Nozzle with M34

MODEL NO.	DESCRIPTION SHIPPING WEIGHT	LBS (KG)
11676274N^	with Three Notch Hold Open Clip and Long Spout	3.0 (1.3)
12150185N^	with Three Notch Hold Open Clip, Spout Ring, Magnet Accufuel® Spout and Gilbarco Magnetic Handguard	ic 3.0 (1.3)
12150187N^	with Three Notch Hold Open Clip and Gilbarco Magnet Handguard	tic 3.0 (1.3)
12150259N^	without Three Notch Hold Open Clip, with Gilbarco Magnetic Handguard	3.0 (1.3)
12150291N^	with Three Notch Hold Open Clip, Low Volume Flow Regulator (3 gpm.) and Gilbarco Magnetic Handguard	3.0 (1.3)
12644155N^	with Three Notch Hold Open Clip and Wayne Magnetic Handguard	3.0 (1.3)
12970185N^	with Three Notch Hold Open Clip, Spout Ring, Magnet Accufuel® Spout and Wayne Magnetic Handguard	ic 3.0 (1.3)
12970259N^	without Three Notch Hold Open Clip, with Wayne Magnetic Handguard	3.0 (1.3)

^ NOT LISTED










 $WARNING: Cancer \ and \ Reproductive \ Harm-www.P65Warnings.ca.gov$



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

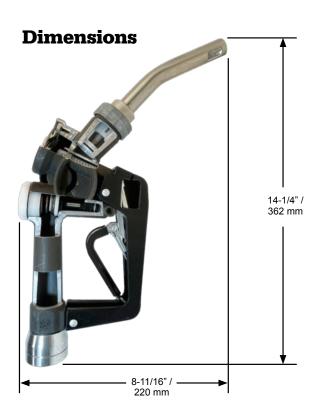




Construction

Body	Die cast, anodized aluminum with high-impact polymer handguard			
Seals	Fluorocarbon			
Spout	19 mm diameter			
Packing	Double o-ring seal protected by fiber-reinforced Teflon®			
Lever	One-piece polymer			
Inlet	M34 x 1.5 mm			

X DEF NOZZLE AVERAGE BACK PRESSURE PERFORMANCE VERIFICATION



Rev 0 4/24 114

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard Mate Guard

Waffle Guard **Options**

1808 Waffle Guard



Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip



Handguard Options

Standard Polymer Handguard

Gilbarco Polymer Tokheim Polymer Handguard (with or without Magnet)

Handguard

Wayne Polymer Handguard



Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

3 - Position Latch Plate







Rev 0 4/24 115



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

System Options

Swivels

MODEL NO.	DESCRIPTION
007275	1" M BSPP x M34 M Inline Swivel

Guards

MODEL NO.	DESCRIPTION
001808	Waffle Splash Guard
003795	Mate Nozzle Guard
004145	Full Nozzle Guard
007361	Handle Cover (Black)
014114	International Mate Nozzle Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION			
013285	with StreamShaper®			
013286	with Spout Ring and Magnetic Accufuel® Safety Feature			

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION				
03185	M34 Single-Plane Swivel connected to 1" BSPP Service				
	Reconnectable Safe-T-Break®				

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сиѕтом
Red	-02	Silver	-09	Apple Green	-18 <i>сиѕтом</i>
Green	-03	■ BP Green	-16	Purple	-19 сиѕтом
Black	-04	M Blue	-25	Pink	-20 сиѕтом
Yellow	-05	Orange	-39	BPS Green	-22 сиѕтом
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com

