

X DEF Nozzles



Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- X DEF nozzle shuts off when tank is full.
- Lighter than stainless steel nozzles.
- *StreamShaper*[®] reduces turbulence for straighter fuel flow and less splash back spillage.
- Less expensive than comparable nozzles.
- Tilt poppet design provides precise “to-the-penny” dispensing.
- Stainless steel spout for durability.
- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard 22241-2:2006.



MODEL NO.
11676155N

New X DEF Nozzle with 3/4" NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
11676155N [^]	with Three Notch Hold Open Clip	3.0 (1.3)
11676188N [^]	with Three Notch Hold Open Clip, Spout Ring and Magnetic Accufuel [®] Spout	3.0 (1.3)
11676189N [^]	with Three Notch Hold Open Clip and Long Spout	3.0 (1.3)
12150155N [^]	with Three Notch Hold Open Clip and Gilbarco Magnetic Handguard	3.0 (1.3)
12970155N [^]	with Three Notch Hold Open Clip and Wayne Magnetic Handguard	3.0 (1.3)

[^] NOT LISTED

New X DEF Nozzle with 3/4" BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1167691N [^]	with Three Notch Hold Open Clip, Spout Ring and Magnetic Accufuel [®] Spout	3.0 (1.3)
11676154N [^]	with Three Notch Hold Open Clip	3.0 (1.3)
11676180N [^]	with Three Notch Hold Open Clip without Waffle Guard	3.0 (1.3)
11676190N [^]	with Three Notch Hold Open Clip and Long Spout	3.0 (1.3)
11676290N [^]	with Three Notch Hold Open Clip, Spout Ring and Magnetic Accufuel [®] Long Spout	3.0 (1.3)
12150154N [^]	with Three Notch Hold Open Clip and Gilbarco Magnetic Handguard	3.0 (1.3)
1215091N [^]	with Three Notch Hold Open Clip, Spout Ring, Magnetic Accufuel [®] Spout and Gilbarco Magnetic Handguard	3.0 (1.3)
12964154N [^]	with Two Notch Hold Open Clip, EZ Lever and Wayne Magnetic Handguard without Spout Groove	3.0 (1.3)
12970154N [^]	with Three Notch Hold Open Clip and Wayne Magnetic Handguard	3.0 (1.3)
13410204N [^]	with Two Notch Hold Open Clip, EZ Lever, without Spout Groove	3.0 (1.3)

[^] NOT LISTED




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



X DEF Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.


Dimensions

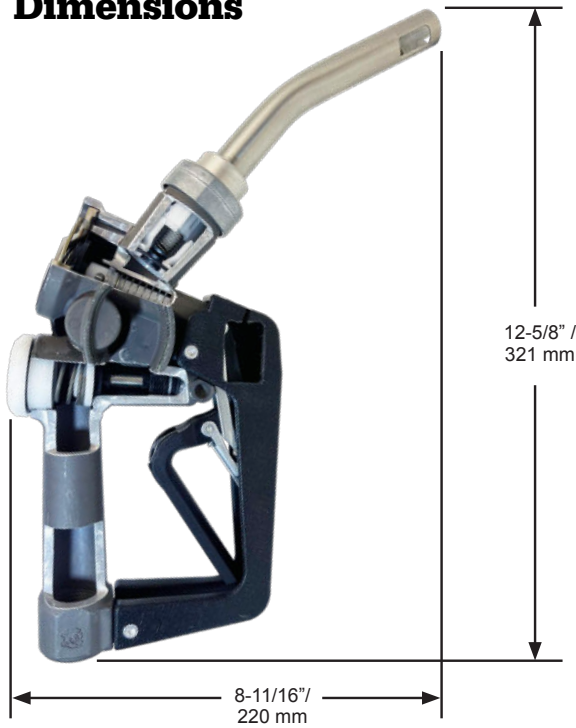

Construction

Body	Anodized Aluminum
Seals	Fluorocarbon
Spout	19 mm diameter
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	One-piece polymer
Inlet	3/4" / 19 mm NPT or 3/4" / 19 mm BSPP

X DEF NOZZLE AVERAGE BACK PRESSURE PERFORMANCE VERIFICATION

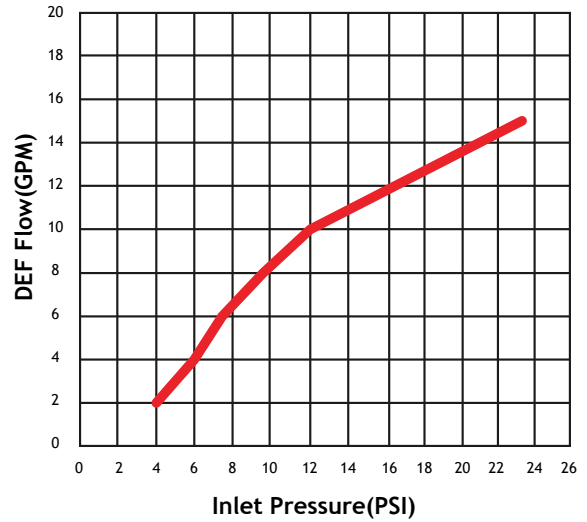



X DEF Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options

Full Grip Guard

Mate Guard



Waffle Guard Options


1808 Waffle Guard



Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip

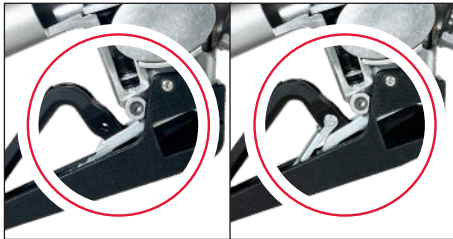

Handguard Options

Standard Polymer Handguard

Gilbarco Polymer Handguard (with or without Magnet)

Tokheim Polymer Handguard (with or without Magnet)

Wayne Polymer Handguard (with or without Magnet)




Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

3 - Position Latch Plate

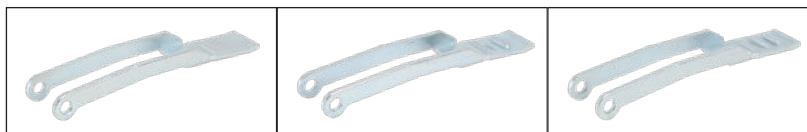



X DEF Nozzles

Automatic shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
012070	3/4" F x 3/4" F NPT Reconnectable Safe-T-Break®
012659	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
007282	3/4" M BSPP x 3/4" Hose Barb Roller Bearing Inline Swivel
010936	3/4" M BSPP x 3/4" Hose Barb Inline Swivel
012604	3/4" M x 3/4" F NPT Roller Bearing Inline Swivel
012656	3/4" M x 3/4" F BSPP Roller Bearing Inline Swivel

Spouts

MODEL NO.	DESCRIPTION
007360	with Spout Ring and Flo-Stop®
007362	with Flo-Stop®
007364	with Spout Ring and Magnetic Accufuel® Safety Feature

Guards

MODEL NO.	DESCRIPTION
001808	Waffle Splash Guard
003795	Mate Nozzle Guard
004145	Full Nozzle Guard
007361	Handle Cover (Black)
014114	International Mate Nozzle Guard

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007522	3/4" BSPP Seal Kit Assembly
013285	with StreamShaper®
013286	with Spout Ring and Magnetic Accufuel® Safety Feature
015319	with Long Spout and StreamShaper®

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
012828	3/4" BSP M Multi-Plane Swivel connected to 3/4" BSP F Reconnectable Safe-T-Break®
012831	3/4" NPT M Multi-Plane Swivel connected to 3/4" NPT F Reconnectable Safe-T-Break®
012887	3/4" BSP M Multi-Plane Swivel connected to 1" BSP F Reconnectable Safe-T-Break®
012890	3/4" BSP M Multi-Plane Swivel connected to 1" BSP M Reconnectable Safe-T-Break®

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-25	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.