

# 1690 WN Nozzles



1690 WN

DISTILLED SPIRITS DISPENSING

**Extreme High-Flow automatic shut-off nozzle for distilled spirits dispensing.**

- 1690 WN nozzle shuts off when the container is full.
- Nozzle is equipped with two-position hold open latch.
- Dual poppet design equalizes pressure on both sides of the main poppet valve in order to aid in lifting the lever, and opening the main poppet valve for full flow.
- Design includes a self-adjusting stem packing.
- Right angle design allows nozzle to “fit” close to walls and corners.
- Aluminum body, spout, and internal parts are nickel plated to prevent contamination and corrosion.
- Seals provide maximum durability and chemical resistance to higher concentrations of ethanol.
- Strong flow (up to 100 gpm / 378.5 Lpm).
- Comes standard with a full grip guard.

## New Nozzles with NPT Inlet

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
875010N^	with Two Position Hold Open Device	3.9 (1.7)
		^ NOT LISTED

## New Nozzles wit BSP Threads

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
875038N^	with Two Position Hold Open Device	3.9 (1.7)
		^ NOT LISTED



MODEL NO.  
875010N^




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



# 1690 W/N Nozzles


**Extreme High-Flow automatic shut-off nozzle for distilled spirits dispensing.**

## Dimensions

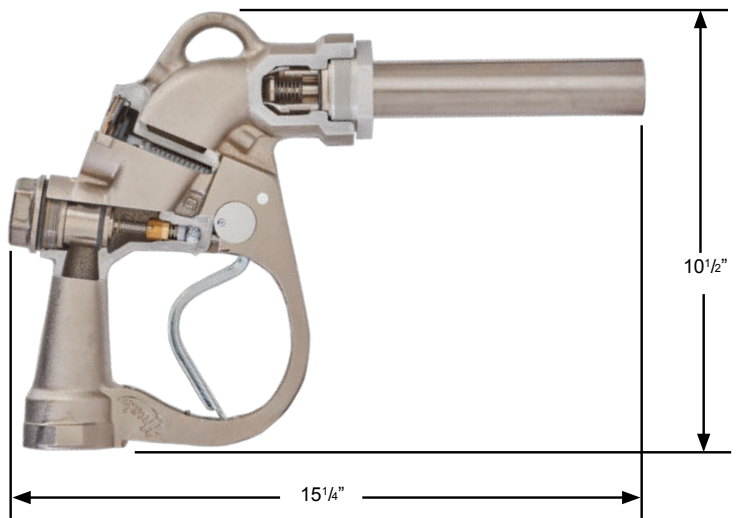

## Construction

Body	Nickel-plated sand cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	One piece contoured steel
Inlet	1-1/2" (38.1 mm) NPT or 1-1/2" (38.1 mm) BSP

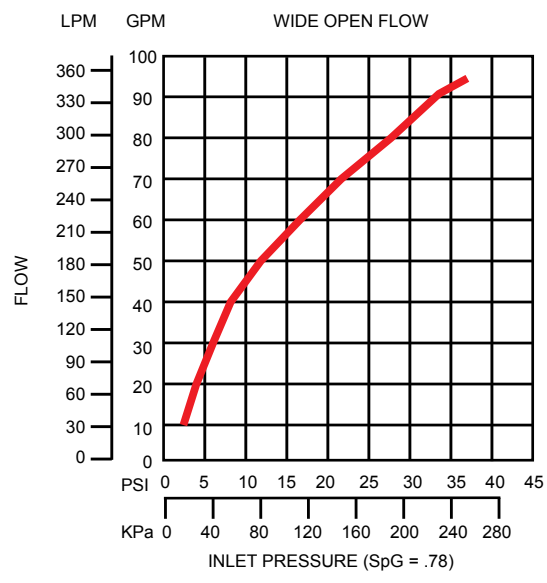



# 1690 WN Nozzles

**Extreme High-Flow automatic shut-off nozzle for distilled spirits dispensing.**

## Nozzle Options

---

### Hold Open Latch Pin Options

With Hold Open Latch Pins

Without Hold Open Latch Pins

