V34 COAX EZL Nozzles





Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

- V34 COAX EZL nozzle shuts off when:
 - the pump shuts off.
- the gas tank is full.
- the lever is opened before the pump is turned on.
- · Uses unleaded spout with spout ring, soft vapor splash guard and coaxial design that allows for fuel to be dispensed through the center of the spout while collecting vapors between the inner and outer spout
- the leak detector has not completed the test cycle.
- tubes.

Nozzle is equipped with a

precise "to-the-penny" dispensing.

· Tilt poppet design provides

- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- Husky® vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.
- · Nozzle comes standard with a full grip guard.
- Optional cold weather seals are rated to -40°F/C.
- · Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's

- proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.
- Optional sightglass provides a clear window for the customer to view the fuel as it passes through the main poppet valve.



MODEL NO.	DESCRIPTION SHIPPING WEIGHT LBS		
1422904N^	with Two Notch Hold Open Clip and ADNOC RFID Spout Specifications, without Vapor Emissions Guard 3.3 (1.5)		
		^ NOT LISTE	












WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov





V34 COAX EZL Nozzles


Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

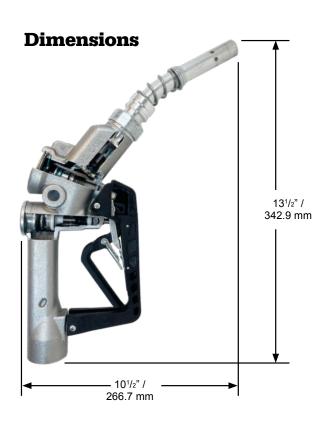


Construction

One piece sand cast aluminum with high-impact polymer handguard		
Fluorocarbon		
acking Double o-ring seal protected by fiber-reinforced Teflon®		
Two piece polymer EZ Lever		
M34 x 1.5mm		







Rev 0 5/24 166



Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options



Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip


Handguard Options



Sightglass Option



Latch Plate Options



Rev 0 5/24 167





Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
004034	Reconnectable Safe-T-Break®
004034A*	Reconnectable Safe-T-Break® - Atex
005134A*	Non-Reconnectable Safe-T-Break® - Atex
006210	Non-Reconnectable Safe-T-Break®
008332	MAGBREAK® Coax M34 CK
010513	Non-Reconnectable Safe-T-Break® - Shearpin

Spouts

MODEL NO.	DESCRIPTION
008642	V34-006200 Coaxial Spout Assembly Kit (Includes 009968 Spout Assembly and 004000 VSG)
009968	V34-006200 Coaxial Spout Assembly

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

DESCRIPTION			
Unleaded Spout Gauge			
Hold Open Clip Kit			
Vapor Splash Guard (VSG) with Clamp			
Vapor Splash Guard Clamp			
O-ring, Air / Liquid Test Spout Adaptor			
Air / Liquid Spout Adaptor			
O-ring Kit			
Tool for dry Air / Liquid Test			
Vapor Assist Flo-Equalizer®			
VSG Clamp Tool			
Hose Conversion Adaptor M34 x 1.5			
Nozzle Service Kit			
Waffle VSG with Clamp (single notch V34)			
Waffle VSG without Clamp (single notch V34)			

Swivels

MODEL NO.	DESCRIPTION		
004605	Multi-Plane Swivel		
004605A*	Multi-Plane Swivel - Atex		

Guards

MODEL NO.	DESCRIPTION
004231	Full Grip Reguard
006628	POPD® S Clear Cover
006660	POPD® S Full Grip Guard
006951	Full Grip Guard
007220	POPD® S Full Grip Reguard
007999	POPD® H Clear Cover
008184	POPD® H Full Grip Guard
008191	POPD® H Full Grip Reguard
010089	Black Handle Cover
014526	Mate Guard

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сиѕтом
Red	-02	Silver	-09	Apple Green	-18 сиѕтом
Green	-03	■ BP Green	-16	Purple	-19 сиѕтом
Black	-04	M Blue	-25	Pink	-20 сиѕтом
Yellow	-05	Orange	-39	BPS Green	-22 сиѕтом
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com



