

# V34 COAX Nozzles



V34  
COAX

VAPOR RECOVERY

## Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

- V34 COAX nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Uses unleaded spout with spout ring, soft vapor splash guard and coaxial design that allows for fuel to be dispensed through the center of the spout while collecting vapors between the inner and outer spout tubes.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- Tilt poppet design provides precise “to-the-penny”
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle’s lever.
- Husky® vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Nozzle comes standard with a full grip guard.
- Optional cold weather seals are rated to -40° F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser’s proximity switch, or can be provided without the magnet for dispensers equipped with a standard “flapper” switch.
- Optional sightglass provides a clear window for the customer to view the fuel as it passes through the main poppet valve.

### New Unleaded PHG Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
6200041	with Three Notch Hold Open Clip and Vapor Splash Guard	3.3 (1.5)
6200041N <sup>^</sup>	with Three Notch Hold Open Clip and Vapor Splas Guard	3.3 (1.5)

<sup>^</sup> NOT LISTED



MODEL NO.  
6200041




WARNING: Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



# V34 COAX Nozzles




Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

## Dimensions

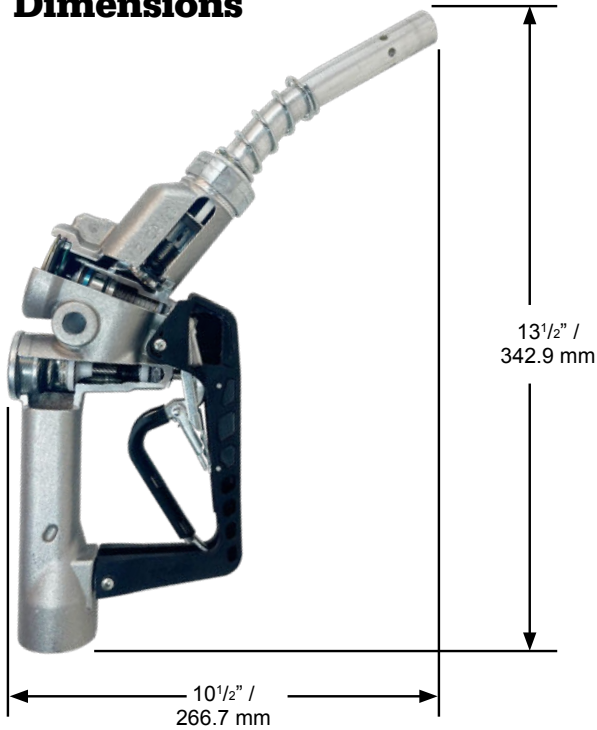

## Construction

Body	One piece sand cast aluminum with high-impact polymer handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber-reinforced Teflon®
Lever	One piece contoured steel with hard polymer lever cover
Inlet	M34 x 1.5mm

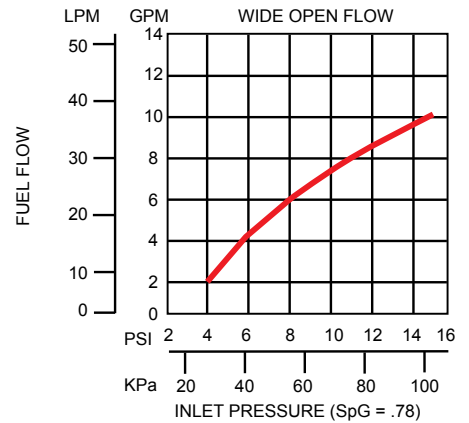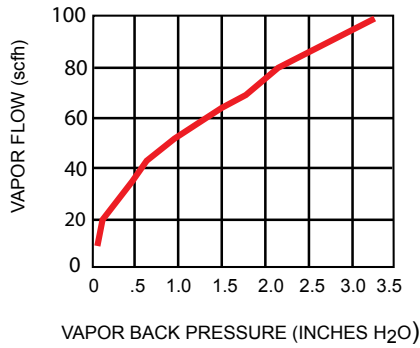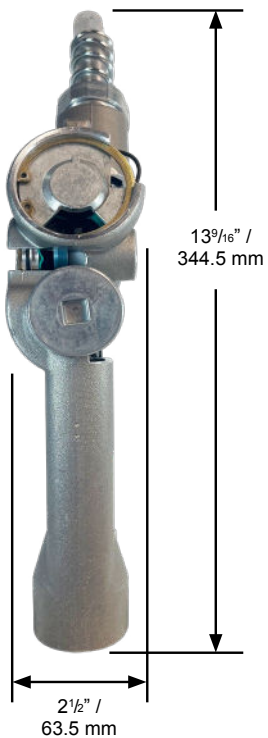



# V34 COAX Nozzles

Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.

## Nozzle Options

### Nozzle Guard Options

Full Grip Guard

POPD<sup>®</sup>S Full Grip Guard

POPD<sup>®</sup>H Full Grip Guard

Mate Guard

POPD<sup>®</sup>S Mate Guard


POPD<sup>®</sup>H Mate Guard



### Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip

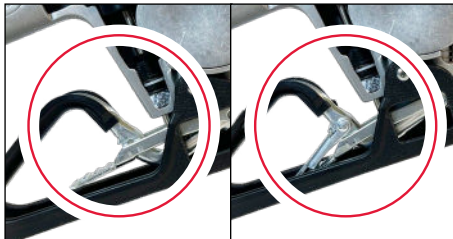

### Handguard Options

Standard Polymer Handguard

Gilbarco Polymer Handguard (with or without Magnet)

Tokheim Polymer Handguard (with or without Magnet)

Wayne Polymer Handguard (with or without Magnet)




### Latch Plate Options

1 - Position Latch Plate

2 - Position Latch Plate

3 - Position Latch Plate

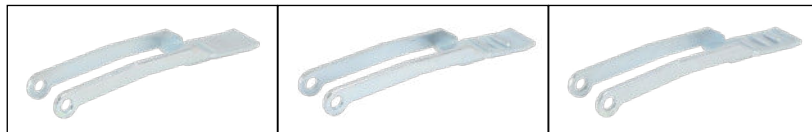

### Sightglass Option





# V34 COAX Nozzles

**Pressure-activated, automatic shut-off vacuum assist nozzle for full-service and self-service stations.**

## System Options

### Safe-T-Breaks®

MODEL NO.	DESCRIPTION
004034	Reconnectable Safe-T-Break®
004034A*	Reconnectable Safe-T-Break® - Atex
005134A*	Non-Reconnectable Safe-T-Break® - Atex
006210	Non-Reconnectable Safe-T-Break®
008332	MAGBREAK® Coax M34 CK
010513	Non-Reconnectable Safe-T-Break® - Shearpin

### Spouts

MODEL NO.	DESCRIPTION
008642	V34-006200 Coaxial Spout Assembly Kit (Includes 009968 Spout Assembly and 004000 VSG)
009968	V34-006200 Coaxial Spout Assembly

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
000397	Unleaded Spout Gauge
003593	Hold Open Clip Kit
004000	Vapor Splash Guard (VSG) with Clamp
004039	Vapor Splash Guard Clamp
004335	O-ring, Air / Liquid Test Spout Adaptor
004360	Air / Liquid Spout Adaptor
005233	O-ring Kit
005260	Tool for dry Air / Liquid Test
005837	Vapor Assist Flo-Equalizer®
006497	VSG Clamp Tool
006941	Hose Conversion Adaptor M34 x 1.5
007089	Nozzle Service Kit
010073	Waffle VSG with Clamp (single notch V34)
010076	Waffle VSG without Clamp (single notch V34)

### Swivels

MODEL NO.	DESCRIPTION
004605	Multi-Plane Swivel
004605A*	Multi-Plane Swivel - Atex

### Guards

MODEL NO.	DESCRIPTION
004231	Full Grip Reguard
005494	Lever Guard
006628	POPD® S Clear Cover
006660	POPD® S Full Grip Guard
006951	Full Grip Guard
007220	POPD® S Full Grip Reguard
007999	POPD® H Clear Cover
008184	POPD® H Full Grip Guard
008191	POPD® H Full Grip Reguard
010089	Black Handle Cover
014526	Mate Guard

### Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR <i>CUSTOM</i>	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 <i>CUSTOM</i>
Red	-02	Silver	-09	Apple Green	-18 <i>CUSTOM</i>
Green	-03	BP Green	-16	Purple	-19 <i>CUSTOM</i>
Black	-04	M Blue	-25	Pink	-20 <i>CUSTOM</i>
Yellow	-05	Orange	-39	BPS Green	-22 <i>CUSTOM</i>
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.