



Automatic shut-off vacuum assist nozzle for full-service and self-service stations.

- V34I EZL nozzle shuts off when the gas tank is full.
- Stainless steel reinforced spout bushing keeps spout tip round, and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® devicet hat shuts off the nozzle if it falls from the fill neck or raises above the horizontal.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Tilt poppet design provides precise "to-the-penny" dispensing.
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.

- Husky® vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Vapor assist achieved at the body end of the spout where a vapor ring catches emissions.
- Uses international spout and aluminum vapor collector.

- ADA-compliant EZ Lever reduces the force required to open the main poppet valve by 50%, resulting in a lever operating force ≤5 lbs.
- Nozzle comes standard with a full grip guard.
- Optional cold weather seals are rated to -40°F/C.
- Optional Gilbarco, Tokheim, and Wayne handguards can be fitted with a magnet to trigger the dispenser's proximity switch, or can be provided without the magnet for dispensers equipped with a standard "flapper" switch.
- Optional vapor insert increases the vapor back pressure, closely matching that of the competition, and making installation a breeze, with little-to-no changes to the vacuum pump draw.
- Optional sightglass provides a clear window for the customer to view the fuel as it passes through the main poppet valve.



MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)		
13787223N^	with Two Notch Hold Open Clip and Aluminum			
	Vapor Collector	3.3 (1.5)		
		^ NOT LISTED		

ISO 9001:2015 SERTIFIED





MODEL NO. 13787223N^






WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




Automatic shut-off vacuum assist nozzle for full-service and self-service stations.

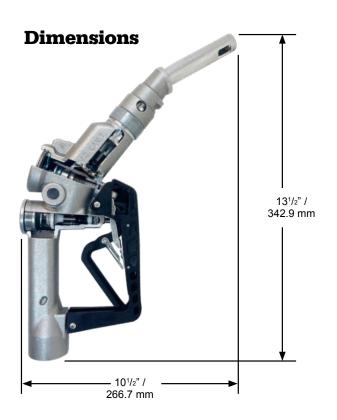


Construction

Seals Fluorocarbon Packing Double o-ring seal protected by fiber-reinforced Teflon® Lever Two piece polymer EZ Lever Inlet M34 x 1.5mm	Body	One piece sand cast aluminum with high-impact polymer handguard		
Lever Two piece polymer EZ Lever	Seals	Fluorocarbon		
	Packing	Double o-ring seal protected by fiber-reinforced Teflon®		
Inlet M34 x 1.5mm	Lever	Two piece polymer EZ Lever		
	Inlet	M34 x 1.5mm		







Rev 0 5/24 182



Automatic shut-off vacuum assist nozzle for full-service and self-service stations.

Nozzle Options

Nozzle Guard Options



Waffle Guard Options

1808 Waffle Guard



TUV Vapor Insert

07329



Lever Options

Lever without Hold Open Clip

Lever with Hold Open Clip




Handguard Options

Standard Polymer Handguard (with or without Magnet) (with or without Magnet)



Latch Plate Options



Sightglass Option



Rev 0 5/24 183





Automatic shut-off vacuum assist nozzle for full-service and self-service stations.

System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
004034	Reconnectable Safe-T-Break®
004034A*	Reconnectable Safe-T-Break® - Atex
005134A*	Non-Reconnectable Safe-T-Break® - Atex
006210	Non-Reconnectable Safe-T-Break®
008332	MAGBREAK® Coax M34 CK
010513	Non-Reconnectable Safe-T-Break® - Shearpin

Spouts

MODEL NO.	DESCRIPTION
006291	V34 Spout Assy Kit (Includes 004000 VSG and 006391 Spout Assembly)
006391	V34 Spout Assembly with Streamshaper®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

DESCRIPTION
Unleaded Spout Gauge
Hold Open Clip Kit
O-ring, Air / Liquid Test Spout Adaptor
Air / Liquid Spout Adaptor
O-ring Kit
Tool for dry Air / Liquid Test
Vapor Assist Flo-Equalizer®
Hose Conversion Adaptor M34 x 1.5
Nozzle Service Kit

Swivels

MODEL NO.	DESCRIPTION
004605	Multi-Plane Swivel
004605A*	Multi-Plane Swivel - Atex

Guards

MODEL NO.	DESCRIPTION
004231	Full Grip Reguard
006628	POPD® S Clear Cover
006660	POPD® S Full Grip Guard
006951	Full Grip Guard
007220	POPD® S Full Grip Reguard
007999	POPD® H Clear Cover
008184	POPD® H Full Grip Guard
008191	POPD® H Full Grip Reguard
010089	Black Handle Cover
014526	Mate Guard

Guard Color Chart

COLOR	SUFFIX	COLOR	SUFFIX	COLOR CUSTOM	SUFFIX
Blue	-01	Gold	-08	Amoco Blue	-07 сиѕтом
Red	-02	Silver	-09	Apple Green	-18 сиѕтом
Green	-03	■ BP Green	ı -16	Purple	-19 сиѕтом
Black	-04	M Blue	-25	Pink	-20 сиѕтом
Yellow	-05	Orange	-39	BPS Green	-22 сиѕтом
White	-06				

Scuff Guards are to be ordered with the corresponding guard color option added to the model number. Example: If BLUE guards are desired, add guard color option -01 to the model number (159504-01). For custom colors, a minimum order of 4,000 guards will be required.



2325 Husky Way • Pacific, MO 63069 (800) 325-3558 • Fax (636) 825-7300 www.husky.com • sales@husky.com



