

Pressure activated, automatic shut-off nozzle for full-service and self-service stations.

- XS[®] nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- StreamShaper[®] reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.
- 2-piece lever is easier to use:
 - requires ½ the force to open nozzle.
 - ADA compliant.
- Contains a poppet disc seal, rated at -40° F/C to prevent fuel leakage from the main seal in extreme cold weather.
- Stainless steel spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop[®] device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.



New Unleaded Nozzles


MODEL	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1396804	with Two Notch Hold Open Clip	3.1 (1.4)
1396866	without Hold Open Clip, with Waffle Splash Guard	3.1 (1.4)

New Light Duty Diesel Nozzles

MODEL	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
1396803	with Two Notch Hold Open Clip	3.1 (1.4)
1396867	without Hold Open Clip, with Waffle Splash Guard	3.1 (1.4)

CONSTRUCTION

Body	Die cast aluminum with polymer handguard
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon [®]
Lever	Two piece polymer lever
Inlet	3/4" / 19 mm NPT

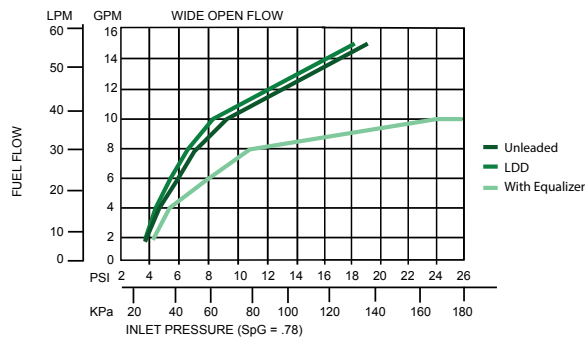

WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov

**Husky**

GENERAL FUELING PRODUCTS

XS® EZ Lever CW PHG Nozzles**Pressure activated, automatic shut-off nozzle for full-service and self-service stations.****Dimensions and System Options****Safe-T-Breaks®**

MODEL NO.	DESCRIPTION
003360	¾" F x ¾" F NPT Reconnectable Safe-T-Break®
002273	¾" F x ¾" F NPT Non-Reconnectable Safe-T-Break®
006130	¾" F x ¾" F NPT Non-Reconnectable PCC Safe-T-Break®
005230	¾" F x ¾" F NPT Low Pull Reconnectable Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
000350	¾" M x ¾" F NPT Multi-Plane Swivel
000355	¾" M x ¾" F NPT Multi-Plane Swivel Anodized Black
002272	¾" M x ¾" F NPT 90° Pump Swivel
003895	¾" M x ¾" F NPT Inline Swivel
002950	¾" M x ¾" F NPT Multi-Plane Restricted Swivel

Swivel/Safe-T-Break® Combos

MODEL NO.	DESCRIPTION
006310	¾" M NPT Multi-Plane Swivel connected to ¾" F NPT Reconnectable Safe-T-Break®

Spouts


MODEL NO.	DESCRIPTION
001473	Unleaded Spout without Flo-Stop®
010434	Unleaded Long Spout without Flo-Stop®
001471	Light Duty Diesel Spout without Flo-Stop® with StreamShaper®
010353	Light Duty Diesel Long Spout without Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
004490	Conventional Flo-Equalizer® - 10 gpm / 37.9 Lpm
003593	Hold Open Clip Kit
007490	Internal Flo-Equalizer® - 10 gpm / 37.9 Lpm
007089	Nozzle Service Kit
000397	Unleaded Spout Gauge

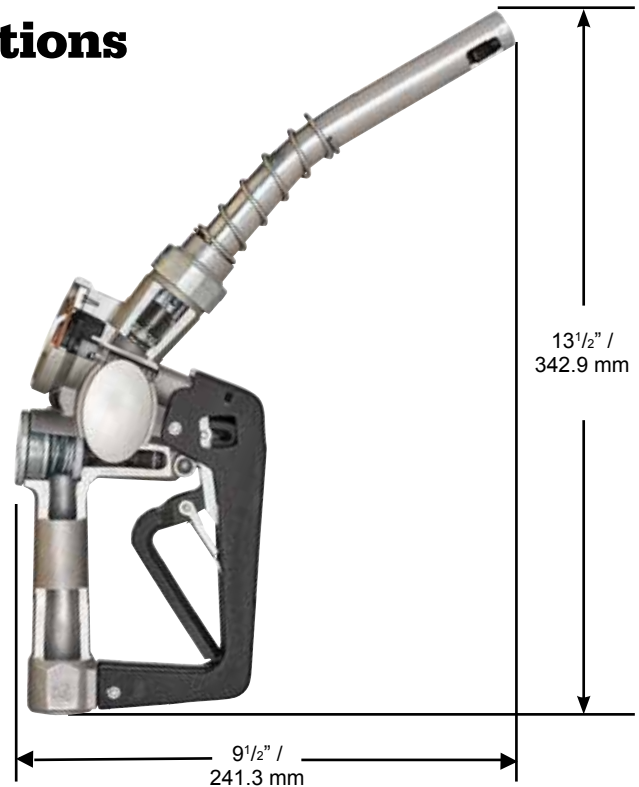**Guards**

MODEL NO.	DESCRIPTION
003376	Black Handle Guard
004145	Full Grip Guard
001806	Full Grip Reguard
005494	Lever Guard
003440	Mate Easy-on Package
003795	Mate Guard
008176	POPD® EZH Nozzle Guard
008175	POPD® EZS Nozzle Guard
007999	POPD® H Clear Cover
008185	POPD® H Full Grip Guard
008192	POPD® H Full Grip Reguard
008166	POPD® H Mate Guard
006628	POPD® S Clear Cover
006665	POPD® S Full Grip Guard
007205	POPD® S Full Grip Reguard
008165	POPD® S Mate Guard
001506	Protection Package
001809	Reguard Protection Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

