



## Husky Model 006310 Swivel Safe-T-Break® combination for standard fueling applications.


- Multi-plane, full 360° spherical rotation for easy movement of nozzle.
- Swivel Sync® feature to prevent separation failure in the 90° position.
- Safe-T-Break® is reconnectable and retains UL listing after reconnecting.
- Dual check valves stops fuel in both directions.
- Separates at less than 325 lbf / 1,445.6 N which minimizes backlash force of separations, reducing damage to equipment.
- 007085A separates at less than 275 lbf / 1,223.3 N.
- Wave spring helps reduce nuisance breaks due to water hammer.
- Dynamic seals have double o-ring construction for long life and low temperature performance.
- Compatible with Ethanol blends though E10.
- Compact and light weight for easy handling.
- Easier to reconnect when installed at the nozzle.
- Eliminates the need for a whip hose.

### Swivel/Safe-T-Break® Combination

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
006310	¾" NPT M x ¾" NPT F Multi-Plane Swivel Reconnectable Safe-T-Break®	.90 (.40)
007085	¾" BSP M x ¾" BSP F Multi-Plane Swivel Reconnectable Safe-t-Break®	.90 (.40)
007085A*	¾" BSP M x ¾" BSP F Multi-Plane Swivel Reconnectable Safe-t-Break® - Atex	.90 (.40)
010959	M34 M x ¾" BSP F Multi-Plane Swivel Reconnectable Safe-T-Break®	.90 (.40)

### Construction

Body	Aluminum, Zinc Alloy
Seals	Fluorosilicone, Fluorocarbon
Springs	Stainless Steel
Threads	Various

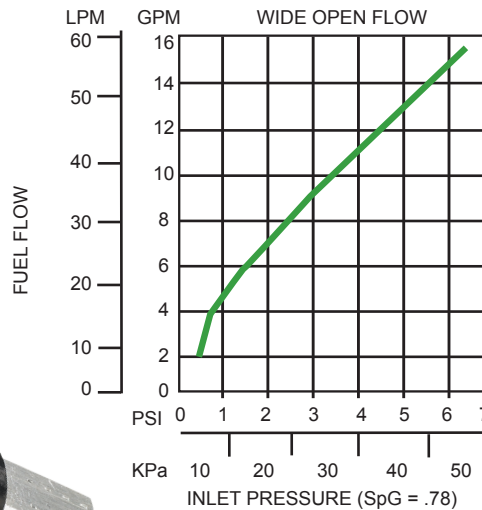

II 2 G  
EN 13617-2 TYPE 1  
EN 13617-4 STYLE 1



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**Husky**

GENERAL FUELING PRODUCTS


# Swivel/STB Standard

Husky Model 006310 Swivel Safe-T-Break® Combination for standard fueling applications.

## Dimensions

### Guards

MODEL NO.	DESCRIPTION
006534	Scuff Guard for Safe-T-Break®

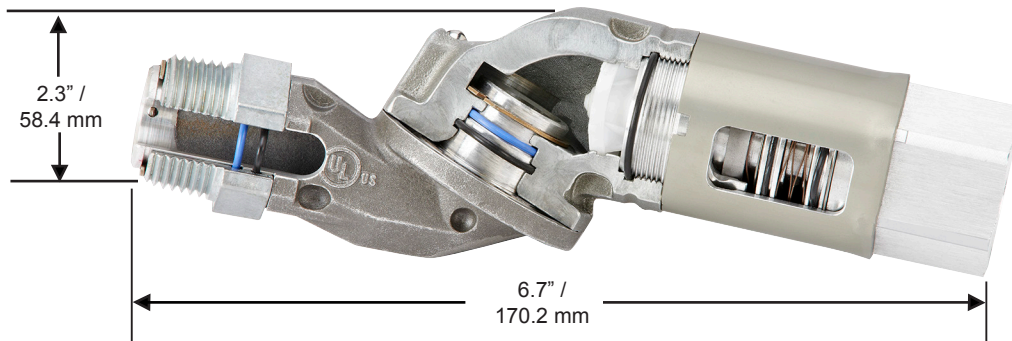

2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A. 