

V34SK DP SG Nozzles



Pressure activated, automatic shut-off vacuum assist nozzle for full-service, self-service and unattended stations.

- V34SK Nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- Strong vapor valve in the nozzle that is mechanically operated by the on-off action of the nozzle's lever.
- Nozzles are equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Sightglass on nozzle allows customer to see fuel flow through nozzle.
- StreamShaper® reduces turbulence for straighter flow and less splash back spillage.
- Nozzle is equipped with a double poppet for precise, slow-flow, to-the-penny dispensing.
- Husky® vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points and fugitive evaporative emissions from the fuel remaining in the vapor path of the hose.
- Uses conventional spout with spout ring and soft vapor escape guard.
- Vapor assist is achieved at the body end of the spout where a vapor ring captures emissions.





New Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E12111170N [^]	with High Flow Double Poppet and Two Notch Hold Open Clip	4.0 (1.8)

[^] NOT LISTED

Construction

Body	Aluminum w/ reinforced polymer handguard
Seals	Fluorocarbon
Packing	Fiber reinforced Teflon®
Lever	One piece contoured steel with hard plastic cover
Inlet	1-1/4" - 18

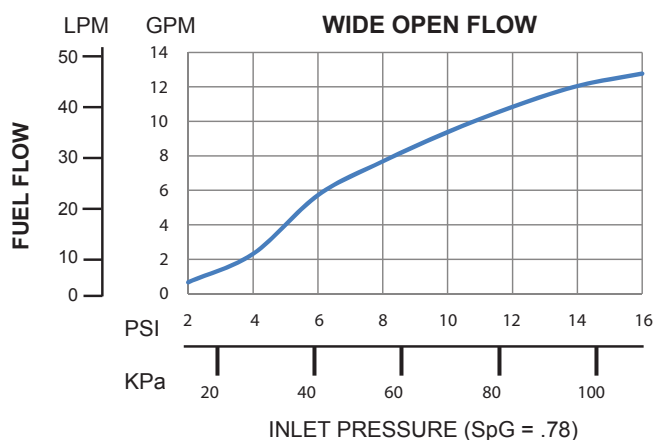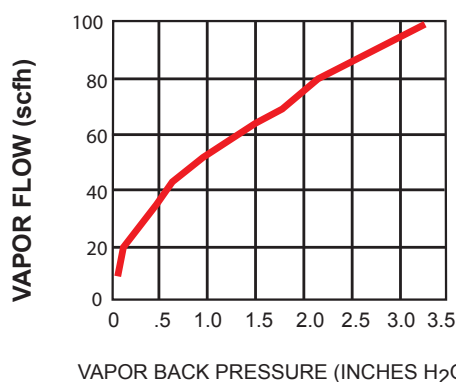

**Husky**

GENERAL FUELING PRODUCTS

V34SK DP SG Nozzles

Pressure activated, automatic shut-off vacuum assist nozzle for full-service, self-service and unattended stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
006560	Reconnectable ORVR Safe-T-Break®

Spouts

MODEL NO.	DESCRIPTION
012115	Complete V34SK Spout Assembly Kit - Unleaded

Pressure/Vacuum Vents


MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
003593	Hold Open Clip Kit
007089	Nozzle Service Kit
005233	O-ring Replacement Kit
000397	Unleaded Spout Gauge
012113	Vapor Splash Guard Clamp
012118	V34SK A/L Spout Adaptor
012114	V34SK Vapor Splash Guard (VSG) with Clamp

Guards

MODEL NO.	DESCRIPTION
006951	Full Grip Guard
004231	Full Grip Reguard
005494	Lever Guard
007999	POPD® H Clear Cover
008184	POPD® H Full Grip Guard
008191	POPD® H Full Grip Reguard
006628	POPD® S Clear Cover
006660	POPD® S Full Grip Guard
007220	POPD® S Full Grip Reguard

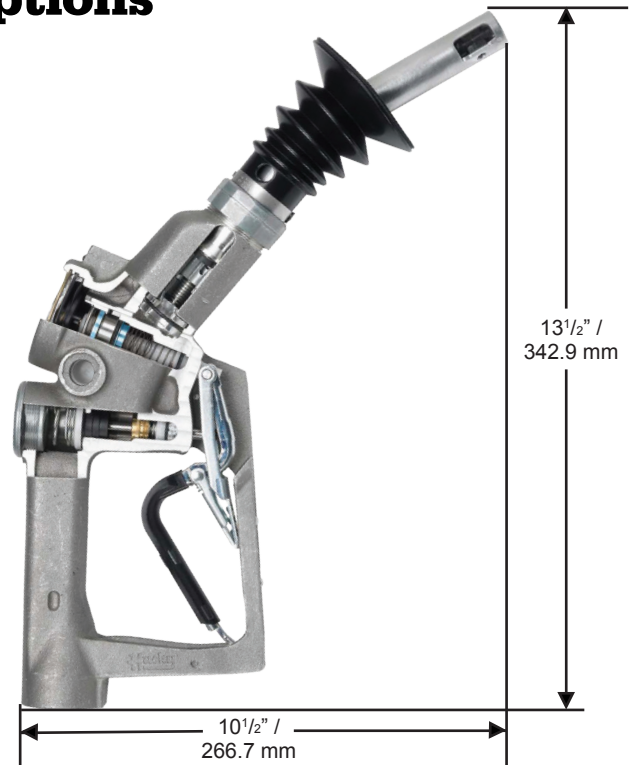

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A.

