

## Pressure activated, automatic shut-off nozzle for full-service and self-service stations.

- XS<sup>®</sup> nozzle shuts off when:
  - the pump shuts off.
  - the gas tank is full.
  - the lever is opened before the pump is turned on.
  - the leak detector has not completed the test cycle.
- Double Poppet allows “to the penny” dispensing.
- Double Poppet is a two (2) step closure reducing the amount of pressure spiking, or “hydraulic hammer” and the adverse effects this has on the hose and dispenser meter.
- A reinforced stainless steel spout bushing keeps spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop<sup>®</sup> device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- *StreamShaper<sup>®</sup>* reduces turbulence for straighter fuel flow and less splash back spillage.
- Comes standard with smooth full grip guard.



### New Unleaded Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
539604	with Three Notch Hold Open Clip	3.1 (1.4)
539676	with Three Notch Hold Open Clip and Waffle Splash Guard	3.1 (1.4)

### New Light Duty Diesel Nozzles with NPT

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
539603	with Three Notch Hold Open Clip	3.1 (1.4)
5396135	with Three Notch Hold Open Clip and Mate Guard with StreamShaper <sup>®</sup>	3.1 (1.4)

### New Unleaded Nozzles with BSPP


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
539616A*	with Three Notch Hold Open Clip - Atex	3.1 (1.4)
539632A*	with Three Notch Hold Open Clip and Sightglass - Atex	3.1 (1.4)
E539616	with Three Notch Hold Open Clip	3.1 (1.4)
E539687	with Three Notch Hold Open Clip Flo-Equalizer <sup>®</sup> and Mate Guard	3.1 (1.4)
E539620	without Hold Open Clip	3.1 (1.4)

### New Light Duty Diesel Nozzles with BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
E539615	with Three Notch Hold Open Clip	3.1 (1.4)
E539686	with Three Notch Hold Open Clip, Flo-Equalizer <sup>®</sup>	3.1 (1.4)

### CONSTRUCTION

Body	One piece die cast aluminum
Seals	Fluorocarbon
Packing	Double o-ring seal protected by fiber reinforced Teflon <sup>®</sup>
Lever	One piece contoured steel with hard plastic cover
Inlet	¾" / 19 mm NPT or BSPP

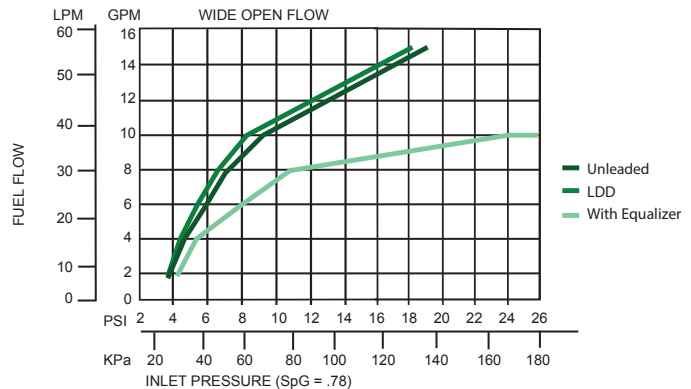

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**Husky**

GENERAL FUELING PRODUCTS

**XS<sup>®</sup>****DP Nozzles****Pressure activated, automatic shut-off nozzle for full-service and self-service stations.**

## Dimensions and System Options

### Safe-T-Breaks<sup>®</sup>

MODEL NO.	DESCRIPTION
003360	3/4" F x 3/4" F NPT Reconnectable Safe-T-Break <sup>®</sup>
002273	3/4" F x 3/4" F NPT Non-Reconnectable Safe-T-Break <sup>®</sup>
006130	3/4" F x 3/4" F NPT Non-Reconnectable PCC Safe-T-Break <sup>®</sup>
005230	3/4" F x 3/4" F NPT Low Pull Reconnectable Safe-T-Break <sup>®</sup>
003385	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break <sup>®</sup>
003385A	3/4" F x 3/4" F BSPP Reconnectable Safe-T-Break <sup>®</sup> - Atex
002774	3/4" F x 3/4" F BSPP Non-Reconnectable Safe-T-Break <sup>®</sup>
002774A	3/4" F x 3/4" F BSPP Non-Reconnectable Safe-T-Break <sup>®</sup> - Atex

### Swivels

MODEL NO.	DESCRIPTION
000350	3/4" M x 3/4" F NPT Multi-Plane Swivel
000355	3/4" M x 3/4" F NPT Multi-Plane Swivel Anodized Black
002272	3/4" M x 3/4" F NPT 90° Pump Swivel
003895	3/4" M x 3/4" F NPT Inline Swivel
002950	3/4" M x 3/4" F NPT Multi-Plane Restricted Swivel
003590	3/4" M x 3/4" F BSPP Multi-Plane Swivel
003590A	3/4" M x 3/4" F BSPP Multi-Plane Swivel - Atex
002771	3/4" M x 3/4" F BSPP 90° Pump Swivel
002771A	3/4" M x 3/4" F BSPP 90° Pump Swivel - Atex

### Swivel/Safe-T-Break<sup>®</sup> Combos


MODEL NO.	DESCRIPTION
006310	3/4" M NPT Multi-Plane Swivel connected to 3/4" F NPT Reconnectable Safe-T-Break <sup>®</sup>
007085	3/4" M BSPP Multi-Plane Swivel connected to 3/4" F BSPP Reconnectable Safe-T-Break <sup>®</sup>
007085A	3/4" M BSPP Multi-Plane Swivel connected to 3/4" F BSPP Reconnectable Safe-T-Break <sup>®</sup> - Atex

### Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
004490	Conventional Flo-Equalizer <sup>®</sup> - 10 gpm / 37.9 Lpm
003593	Hold Open Clip Kit
007089	Nozzle Service Kit
000397	Unleaded Spout Gauge

### Spouts

MODEL NO.	DESCRIPTION
001473	Unleaded Spout without Flo-Stop <sup>®</sup>
010434	Unleaded Long Spout without Flo-Stop <sup>®</sup>
001471	Light Duty Diesel Spout without Flo-Stop <sup>®</sup> with StreamShaper <sup>®</sup>
010353	Light Duty Diesel Long Spout without Flo-Stop <sup>®</sup>

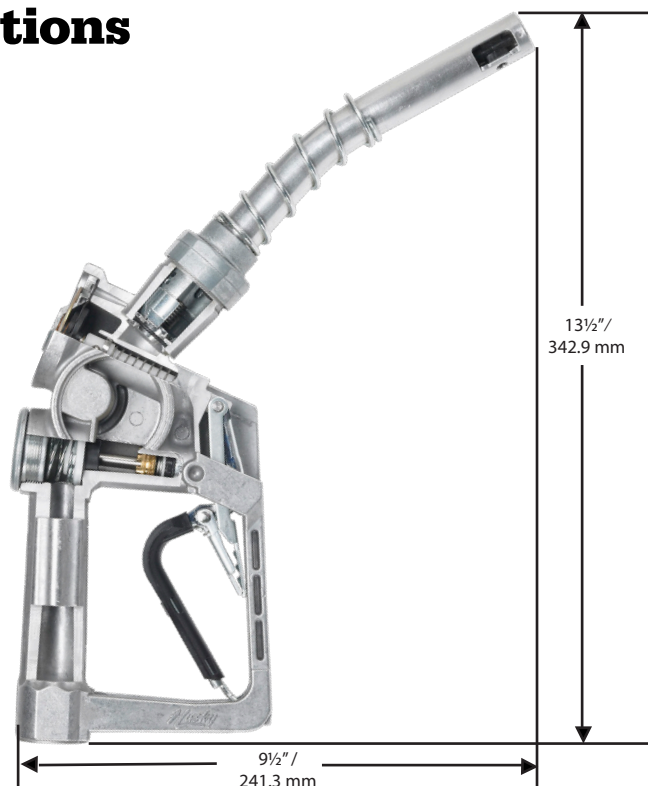

### Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

### Guards

MODEL NO.	DESCRIPTION
003376	Black Handle Cover
004145	Full Grip Guard
001806	Full Grip Reguard
005494	Lever Guard
003440	Mate Easy-on Package
003795	Mate Guard
008176	POPD <sup>®</sup> EZH Nozzle Guard
008175	POPD <sup>®</sup> EZS Nozzle Guard
007999	POPD <sup>®</sup> H Clear Cover
008185	POPD <sup>®</sup> H Full Grip Guard
008192	POPD <sup>®</sup> H Full Grip Reguard
008166	POPD <sup>®</sup> H Mate Guard
006628	POPD <sup>®</sup> S Clear Cover
006665	POPD <sup>®</sup> S Full Grip Guard
007205	POPD <sup>®</sup> S Full Grip Reguard
008165	POPD <sup>®</sup> S Mate Guard
001506	Protection Package
001809	Reguard Protection Package
001808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069  
 (800) 325-3558 • Fax (636) 825-7300  
[www.husky.com](http://www.husky.com) • [sales@husky.com](mailto:sales@husky.com)

MADE IN THE U.S.A.