

Polymer DEF Nozzle



Polymer shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

- Lighter than stainless steel nozzles.
- *Streamshaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Less expensive than comparable nozzles.
- Nozzle shuts off when the DEF tank is full.
- Stainless steel spout for durability.
- Replaceable stainless steel spout.
- Available with magnetic Accufuel® safety feature.
- Lower lever force.
- Flow characteristics of nozzle reduces crystallization of DEF.
- Complies with ISO Standard 22241-2:2006.




New Polymer DEF Nozzle with 1" BSPP

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
873504N [^]	with Two Notch Hold Open Clip without Spout Ring and magnetic Accufuel® Spout	1.53 (0.7)
873508	without Two Notch Hold Open Clip, Spout Ring and magnetic Accufuel® Spout	1.53 (0.7)
873588N [^]	with Two Notch Hold Open Clip and Spout Ring, without magnetic Accufuel® Spout	1.53 (0.7)
873591N [^]	with Two Notch Hold Open Clip, Spout Ring and magnetic Accufuel® Spout	1.53 (0.7)
8735153	without Two Notch Hold Open Clip and magnetic Accufuel® Spout, with Spout Ring	1.53 (0.7)
8735158	without Two Notch Hold Open Clip with Spout Ring and magnetic Accufuel® Spout	1.53 (0.7)
1202991N	with Two Notch Hold Open Clip, Spout Ring, magnetic Accufuel® Spout, and Gilbarco Magnetic Hand Guard	1.53 (0.7)
1307791N [^]	with Two Notch Hold Open Clip, Spout Ring and magnetic Accufuel® Spout, without Spout Groove	1.53 (0.7)
13077154N [^]	with Two Notch Hold Open Clip and Spout Ring, without Spout Groove and magnetic Accufuel® Spout	1.53 (0.7)

[^] NOT LISTED

Construction

Body	Acetal
Seals	Fluorocarbon o-rings and diaphragm
Spout	19 mm diameter
Lever	One-piece contoured steel with hard plastic cover
Inlet	1" BSPP Male/Female seal

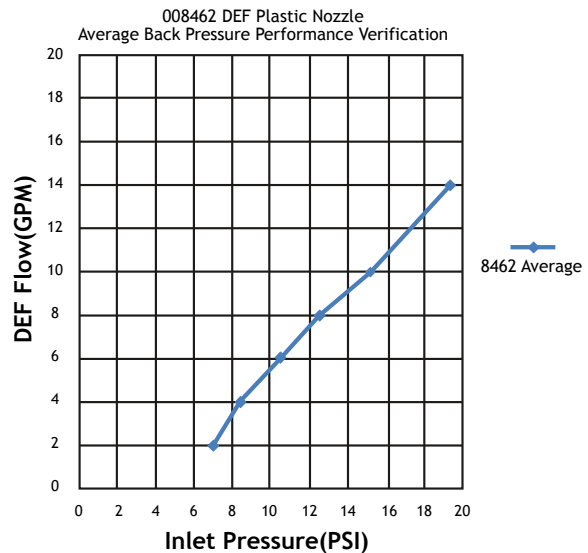

WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov

Polymer shut-off Diesel Exhaust Fluid (DEF) nozzle for full-service and self-service stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
007219	1" M x 1" M BSPP Non-Reconnectable Stainless Steel Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
007275	1" M BSPP x M34 M Inline Swivel
007282	3/4" M BSPP x 3/4" Hose Barb Inline Swivel
007467	1" F x 1" M BSPP Inline Swivel
008510	1" M BSPP x 1" F NPT Inline Swivel
008822	1" F x 1" M BSPP Inline Swivel Face Seal

Spouts

MODEL NO.	DESCRIPTION
013591	with StreamShaper®
013592	with Spout Ring and StreamShaper®
013593	with Spout Ring and Magnetic Accufuel® Safety Feature

Adaptors

MODEL NO.	DESCRIPTION
010227	DEF 1" Female BSPP Adaptor
010549	DEF 1" Female BSPP/1" Female NPT Adaptor
010551	DEF 1" Female BSPP x 3/4" Female NPT Adaptor
010553	DEF 1" Female BSPP X 3/4" Female BSPP Adaptor
010579	1" Female BSPP x 3/4" Male DEF HB Adaptor
010675	1" Female BSPP x 1" Female BSPP Adaptor, Straight

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007523	1" BSPP Seal Kit Assembly



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A. 