

V3 Nozzles



Pressure activated, automatic shut-off, vacuum assist nozzle for full-service, self-service and unattended stations.

- V3 Nozzle shuts off when:
 - the pump shuts off.
 - the gas tank is full.
 - the lever is opened before the pump is turned on.
 - the leak detector has not completed the test cycle.
- V3 Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Husky® vapor return line is an internal part of the body casting, thus eliminating potential vapor leak points.
- Uses coaxial spout with spout spring and has large vapor-capturing holes at the end of the spout.
- Nozzle spout and spout spring are covered by a one year warranty.
- Plunger design provides a better seal to eliminate potential leaking and staining.

New Unleaded Nozzles


MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
6201049	with Three Notch Hold Open Clip	3.6 (1.6)
6201089	without Hold Open Clip	3.6 (1.6)

Rebuilt Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
6241049	with Three Notch Hold Open Clip	3.6 (1.6)
6241089	without Hold Open Clip	3.6 (1.6)

Construction

Body	Aluminum
Seals	Fluorocarbon
Packing	Fiber reinforced Teflon® Double O-Ring Seal
Lever	One piece contoured steel with hard plastic cover
Inlet	M34 x 1.5

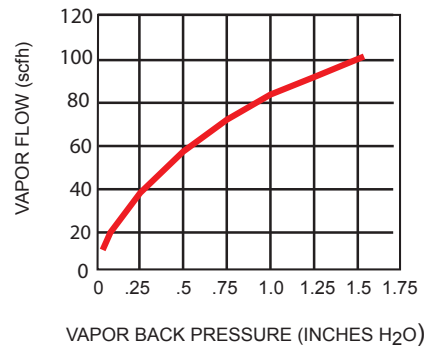

! WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Vacuum assist, automatic shut-off nozzle for full-service, self-service and unattended stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
004034	Reconnectable Safe-T-Break®
004034A	Reconnectable Safe-T-Break® - Atex
006210	Non-Reconnectable Safe-T-Break®
005134A	Non-Reconnectable Safe-T-Break® - Atex
010513	Non-Reconnectable Safe-T-Break® - Shearpin

Swivels

MODEL NO.	DESCRIPTION
004605	Inverted Vapor Assist Swivel
004605A	Inverted Vapor Assist Swivel - Atex

Spouts

MODEL NO.	DESCRIPTION
006289	Complete Spout Assembly Kit - Unleaded
006389	Unleaded Spout

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
004620	2" Slip-On Pressure Vacuum Vent
004885	2" Thread-On Pressure Vacuum Vent - NPT
005885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
004360	Air/Liquid Spout Adaptor
003593	Hold Open Clip Kit
007089	Nozzle Service Kit
005233	O-ring Kit
005260	Tool for dry Air/Liquid Test
000397	Unlead Spout Gauge
005837	Vapor Assist Flo-Equalizer®

Guards

MODEL NO.	DESCRIPTION
005170	Full Grip Guard
005169	Full Grip Reguard
005494	Lever Guard
006955	Waffle Splash Guard

